

Contact us to order free samples

**UNITED KINGDOM:**  
**Gerflor Flooring UK Ltd**  
Park Green, Macclesfield,  
Cheshire, SK11 7LZ  
Tel: 01625 428922  
E-mail: contractuk@gerflor.com

**IRELAND:**  
**Gerflor Ltd**  
Ballybay Road, Co. Monaghan,  
A81 YD83, Republic of Ireland  
Tel: +353 (0) 42 966 1431  
E-mail: gerflorirl@gerflor.com

**gerflor.co.uk**  
**gerflor.ie**



May 2024

Uniclass Pr_35_57_71_76
Cl/SfB (43) Tn6



# FLOORING

2024 COLLECTION

**we care / we act** Our commitments for a sustainable future



**CARBON FOOTPRINT\***  
-20 % kg CO<sub>2</sub> equivalent/m<sup>2</sup> between 2020 and 2025



**BIOSOURCED CONTENT\*\***  
10 % by 2025



**RECYCLED CONTENT**  
30 % by 2025



**ADHESIVE FREE\*\*\***  
50 % by 2025



**ANNUAL VOLUME RECYCLED**  
60 000 t by 2025

**Gerflor**<sup>®</sup>

**Gerflor**<sup>®</sup>

\* Scopes 1 & 2 defined in the GHG protocol \*\* % of activity with biosourced materials \*\*\* % of activity with adhesive free solutions



DLW Marmorette  
0252 Light Grey

# Contents

► Updated Range

<b>Gerflor</b>			
Why Gerflor		2	
Gerflor Services		4	
Sustainable Future		6	
Fundamentals		8	
<b>Contract Safety Flooring</b>		12	
► Tarasafe Impression		14	
► Tarasafe Ultra		16	
► Tarasafe Standard / Plus / Super		18	
<b>Shower Flooring</b>		20	
<b>NEW</b> Tarasafe H <sub>2</sub> O		22	
► Tarasafe Ultra H <sub>2</sub> O		24	
<b>Wall Coverings</b>		26	
<b>NEW</b> Mural Revela		28	
► Mural Calypso		30	
Mural Ultra Design		32	
<b>Residential Slip Resistant Flooring</b>		34	
Griptex		36	
► Texline		38	
<b>Homogeneous Flooring</b>		40	
Mipolam Symbioz™		42	
Mipolam Planet		44	
Mipolam Accord		48	
Mipolam Affinity		50	
Mipolam Cosmo		54	
Mipolam Troplan		55	
Mipolam Classic		56	
<b>ESD Solutions for Dissipative &amp; Conductive Floors</b>		58	
► Mipolam EL7		60	
► Mipolam Robust EL7		60	
► Mipolam EL5		62	
► Mipolam Technic EL5		62	
► Mipolam BioControl EL5		64	
► Mipolam BioControl ESD+		64	
<b>Premium Multilayered Flooring</b>		66	
Premium		68	
<b>Taralay Multilayered Flooring</b>		74	
► Taralay Impression		76	
My Taralay		92	
Taralay Initial		96	
Taralay Libertex		102	
<b>Nerok Multilayered Vinyl Flooring</b>		104	
Nerok 55 & 70		106	
<b>Vinyl Sports Flooring</b>		110	
► Taraflex® Comfort (P3)		112	
► Taraflex® Performance + SL (P2)		114	
► Taraflex® Evolution + SL (P1)		116	
► Taraflex® Multi-Use (P1)		118	
Taraflex® Recreation (P1)		120	
► Taraflex® Surface		122	
My Taraflex®		124	
Modulock Connor Sports®		126	
<b>Outdoor Sports Flooring</b>		128	
Sport Court® PowerGame™ Plus		129	
<b>Rubber Gym Flooring</b>		130	
Powershock		131	
<b>Sports Undercarriage System</b>		132	
► Area Elastic Sprung Floor		133	
<b>Luxury Vinyl Tiles &amp; Planks</b>			
Creation 70		134	
Creation 55		146	
<b>NEW</b> Creation Zen		158	
Saga <sup>2</sup>		166	
<b>Gradus Carpets Premium Collection</b>		170	
Lunar		172	
Urban Myth		174	
Streetwise Style		178	
Streetwise Design		180	
Cityscene & Brickworks		182	
Times Square		184	
Carezone		186	
SqMile Exec		188	
Adventurer		190	
Genus & Volnay		192	
Stratus		194	
Emphasis		195	
<b>High Performance Contractor Collection</b>			
Latour 2		196	
Lafite Connect		198	
Lafite Space		202	
Lafite Plains		204	
Predator		205	
Bodega		206	
<b>Secondary Barrier Matting</b>			
Boulevard 7000		207	
Boulevard Stripe		208	
Boulevard 6000		209	
Boulevard 5000		210	
Boulevard 1500		211	
<b>Fast Track Flooring Tiles</b>		212	
► GTI Max		214	
Attraction®		216	
► Creation 70 Connect		218	
<b>ESD Technical Tiles</b>		220	
► GTI® EL5 Connect		222	
► GTI® EL5 Cleantech		222	
<b>Compact Linoleum Flooring</b>		224	
► DLW Marmorette		226	
DLW Colorette		230	
DLW Uni Walton		232	
<b>Finishes</b>			
► Weld Rods		234	
<b>Appendix</b>			
Installation		236	
Maintenance		237	
<b>Website</b>		240	

Formats	With foam backing (Comfort)	Without foam backing (Compact)	Other	Gradus Carpets

# Why Gerflor

Since 1937, Gerflor **has designed, manufactured and distributed design-led, innovative and eco-responsible** floor coverings and wall protection solutions. Present in more than **100 countries**, with **4,500 employees, 30 subsidiaries** and **24 production sites**, Gerflor serves many activity sectors including health, education, residential accommodation and sport.

## Worldwide presence for better service



Americas

Europe  
Middle East & Africa

Asia & Pacific

- Sales offices
- Manufacturing plants and logistic hubs

**30** sales offices      **24** manufacturing plants and logistic hubs      **5** Technocentres



Industry



Healthcare



Hospitality



Offices



Sport



Education



Retail



Transport



Housing



Public Housing



# Gerflor Services

## Technical and Specification Support Specialists

Our dedicated specialists can assist you with all your specification needs. Whether it's a new build or refurbishment project we have the expertise and innovations to meet all budgets. Hand in hand with our partners, we work together to propose the optimum solution for the client's needs, utilising the most appropriate safe, hygienic and sustainable solutions for the specific applications.

We don't stop at just providing specification advice, we can also provide a free site survey, we will visit, assess and audit the facility and make improvement suggestions to future proof the building interiors.

The Technical Support team is available to offer advice on the specification and installation of products, including guidance on the latest building standards and legislation.

Be rest assured that Gerflor has a worldclass pedigree of products that are tried and trusted and deliver every time. All backed up by a network of technical, specification and customer support teams.



## Quick Delivery

All designs featuring the above icon are available for fast delivery from Gerflor to our stockist. Full rolls/packs only. Deliveries to Ireland & the ROI are subject to additional lead times. Contact your local stockist for more information. For details of your local stockist call 01625 428922

## Sampling Support Services For Every Need

We offer a free sample service for all our clients. Whether it's a range overview binder, loose sample (standard or bespoke), supporting literature or if it is something bespoke you need like a mood board or test material, contact us and we will aim to supply the sample for your required need.

To request a sample, literature or anything else, email [contractuk@gerflor.com](mailto:contractuk@gerflor.com) or call 01625 428922



## Gerflor's key ranges are available as BIM objects

You can download these for free by going to: [www.gerflor.co.uk/services-pro/bim.html](http://www.gerflor.co.uk/services-pro/bim.html)

or by going to the National BIM Library: [www.nationalbimlibrary.com/gerflor](http://www.nationalbimlibrary.com/gerflor)

All Gerflor BIM objects are available in IFC and Revit.



## CPD's and Training

As members of RIBA CPD Providers Network we offer a full range of RIBA assessed and approved CPD seminars covering: Vinyl Flooring, Sports Flooring and Industry specific CPDs such as Healthcare and Industry.

To book a CPD Seminar, contact our Technical Support department on 01625 428922 or Email: [contractuk@gerflor.com](mailto:contractuk@gerflor.com)

## Accreditations and Certifications



# Our commitments for a sustainable future

Gerflor teams have always considered customers and the environment as their absolute priorities. Our floor coverings, wall solutions and finishing components are user friendly, healthy solutions. They are designed with respect for our planet to last as long as possible with proposed end-of-life options. From product design through end-of-life, the circular economy is a core priority for the group. We have determined 5 priority commitments to guide our environmental management up to 2025.

## We care / We act Our commitments for a sustainable future



**CARBON FOOTPRINT\***  
-20 % kg CO<sub>2</sub> equivalent/m<sup>2</sup> between 2020 and 2025



**BIOSOURCED CONTENT\*\***  
10 % by 2025



**RECYCLED CONTENT**  
30 % by 2025



**ADHESIVE FREE\*\*\***  
35 % by 2025



**ANNUAL VOLUME RECYCLED**  
60 000 t by 2025

\* Scopes 1 and 2 defined in the GHG protocol \*\* % of activity with biosourced materials \*\*\* % of activity - adhesive free solution





# FUNDAMENTALS

## A FUSION OF PRODUCTS & VALUES

Gerflor and Gradus offer products which are ideal for use in a wide variety of applications including healthcare, commercial office, education, retail, hospitality & leisure and housing. Products can be combined to provide a complete package that balances performance, aesthetics and cost alongside environmentally responsible manufacturing processes.


## A FRESH APPROACH

We believe passionately in providing the customer with the very best in terms of service. Through our combined team we can offer expert advice to help with product selection backed up with extensive UK stocks to ensure our products are delivered on-time, every-time.

A NEW LEVEL  
OF INNOVATION,  
QUALITY, SERVICE  
& TEAMWORK



CREATION LVT  
TARASAFE  
TARAFLEX  
TECHNICAL TILES  
CARPETS

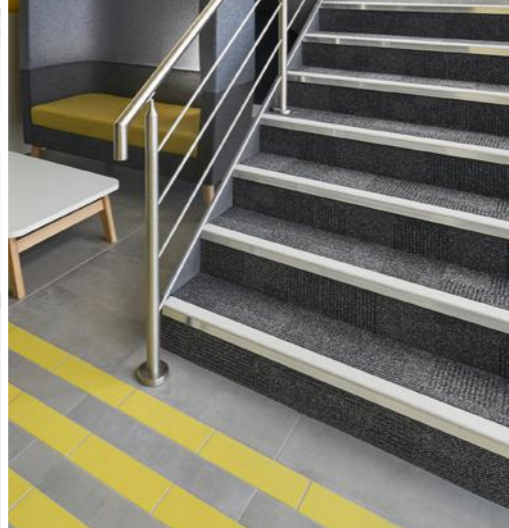



STAIR EDGINGS  
FLOOR TRIMS  
MATTING  
WALL PROTECTION  
LIGHTING



NEXT DAY SERVICE  
PRODUCT EXPERTISE  
WARRANTY  
SUSTAINABILITY



HOUSING  
RETAIL  
HOSPITALITY  
TRANSPORT

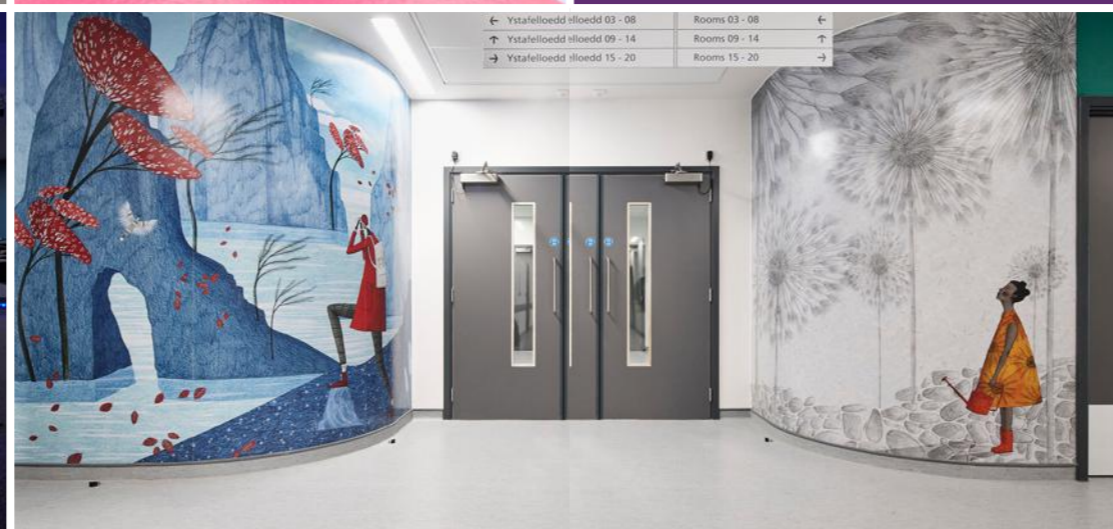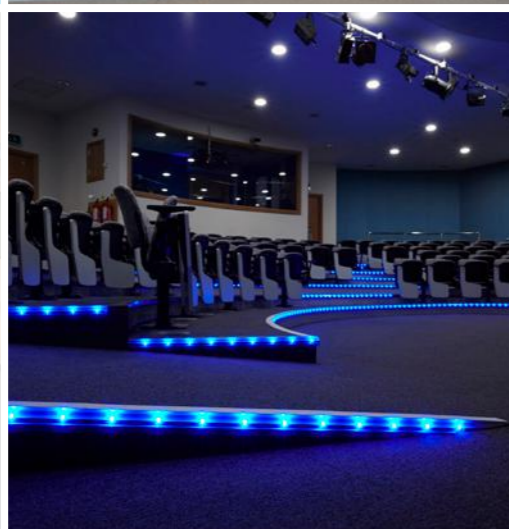

← Ystafelloedd 03 - 08 Rooms 03 - 08 ←  
↑ Ystafelloedd 09 - 14 Rooms 09 - 14 ↑  
→ Ystafelloedd 15 - 20 Rooms 15 - 20 →



EDUCATION  
HEALTHCARE  
COMMERCIAL OFFICE  
SPORTS

# Contract Safety Flooring

**Tarasafe Impression** is a safety flooring collection ideal for hardworking places and has been developed specifically for an extensive range of contract applications.

If you're looking for inspiration and a tough safety flooring that offers both slip resistance and outstanding performance, then look no further.

A decorative vinyl sheet flooring collection with design-led wood & mineral colourways, it is suitable for healthcare, education, retail, public spaces, offices and other commercial interiors.


It also offers a hygienic solution thanks to a revolutionary UV cured ProtecSol® Control surface treatment for easy cleaning and maintenance.

**Tarasafe** is a range of slip resistant sheet flooring that meets HSE guidelines. Constructed from vinyl with deeply inlaid mineral crystal particles (patent pending) and coloured chips for a decorative design, the range contains no carborundum.

All products in the Tarasafe range are reinforced with a glass fibre grid and are suitable for use in all areas of heavy traffic where slip-resistance, durability and hygienic conditions are required.

Tarasafe Standard and Ultra products benefit from Sparclean® surface treatment for extreme resistance to soiling and staining.

All Tarasafe floors come with a 12 year warranty and are 100% recyclable, when the product is at the end of its life.

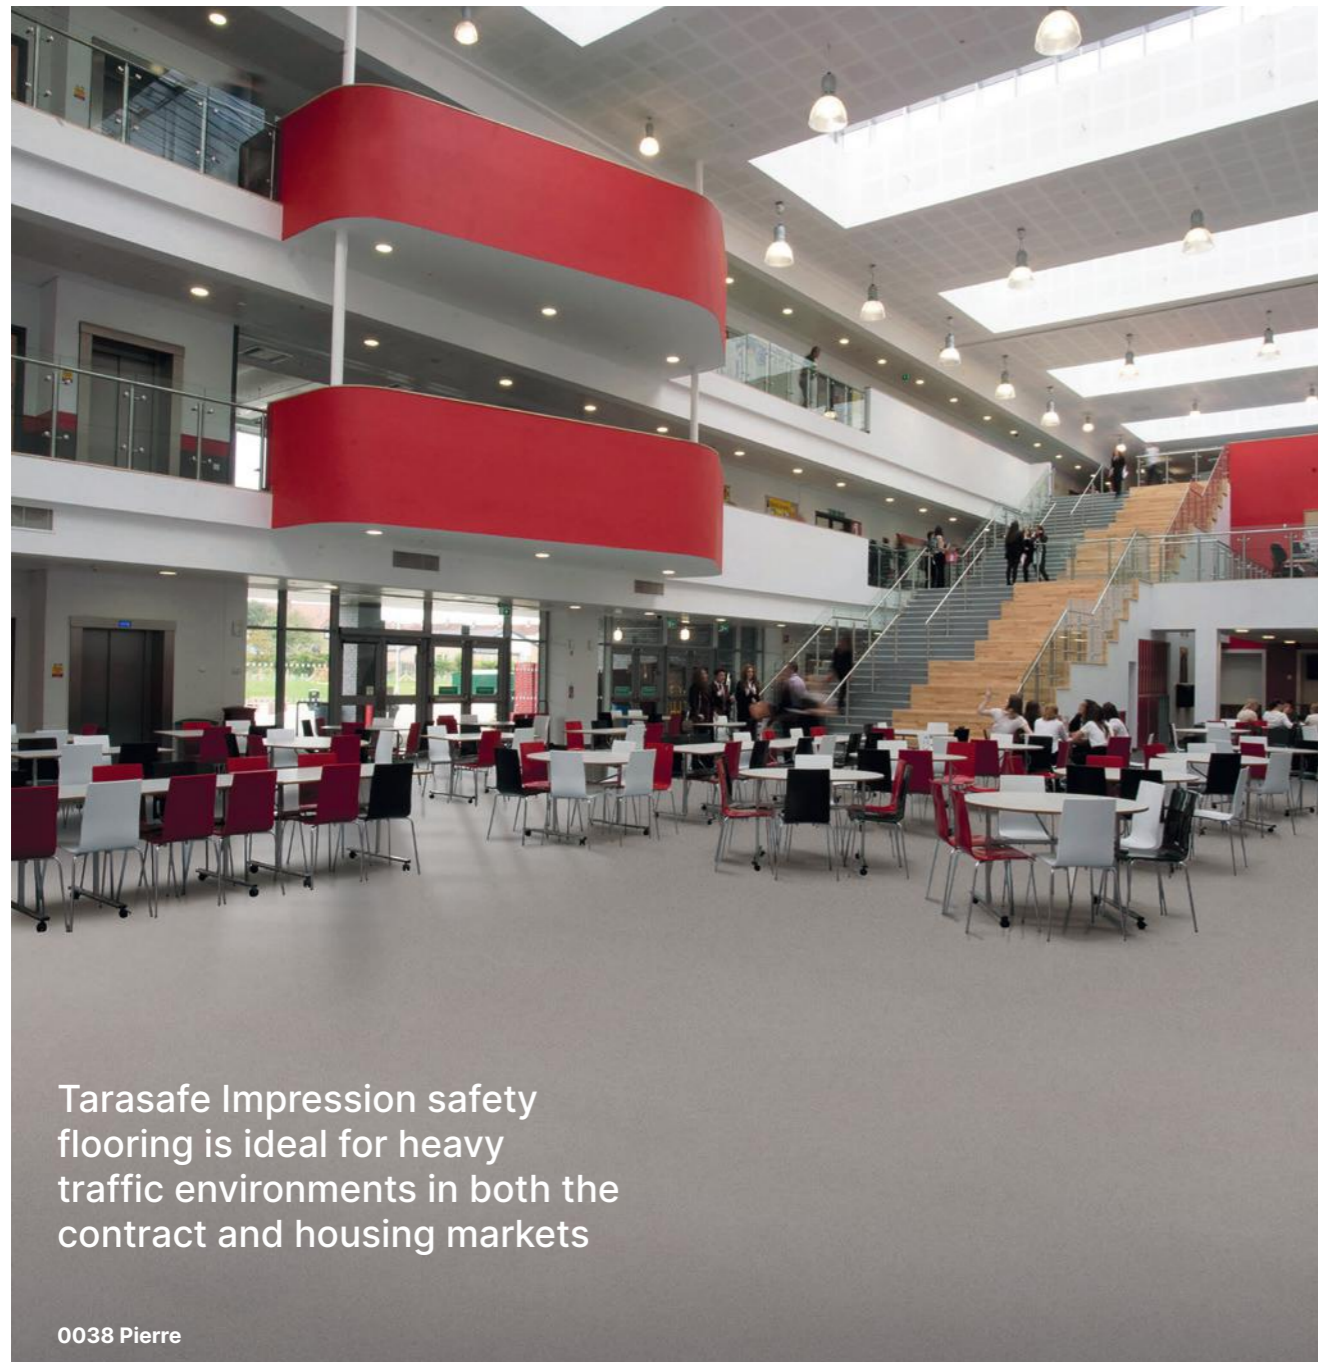

Tarasafe Impression safety flooring is ideal for heavy traffic environments in both the contract and housing markets

0038 Pierre



Tarasafe				
Impression	Ultra	Standard	Super	Plus

Description		Impression	Ultra	Standard	Super	Plus
Thickness	EN ISO 24346 mm	2.0	2.0	2.0	2.2	2.5
Wear layer thickness	EN ISO 24340 mm	0.70	0.85	0.85	1.12	1.14
Weight	EN ISO 23997 g/m <sup>2</sup>	2635	2460	2460	2880	3090
Width of sheet	EN ISO 24341 cm	200	200	200	200	200
Length of sheet	EN ISO 24341 lm	25	20	20	20	20
Classification						
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582	EN ISO 10582	EN ISO 10582
European classification	EN ISO 10874 class	34-43	34-43	34-43	34-43	34-43
Fire rating	EN 13501-1 class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815 kV	< 2	< 2	< 2	< 2	< 2
Slip Resistance						
Pendulum test (dry & wet)	EN 16165 PTV/SRV(1)	> 36	> 36	> 36	-	-
Surface roughness	Rtm/Rz µm	Rz ≥ 20	Rz ≥ 20	Rz ≥ 20	-	-
Ramp test with oil	DIN 51130 class	R11	R10	R10	R12	R10
Ramp test with water	DIN 51097 class	-	B	B	-	-
Ramp test	EN 13845 Annexe C class	-	Esf(2) ESb(3)	Esf(2) ESb(3)	-	-
Performances						
Wear resistance	EN 660.2 mm <sup>3</sup>	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	NF 189	T	T	T	T	T
Type binder content	EN ISO 10582 type	I	I	I	I	I
Dimensional stability	EN ISO 23999 %	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 mm	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10
Residual indentation (measure)	- mm	≈ 0.03	≈ 0.03	≈ 0.05	≈ 0.03	≈ 0.03
Thermal conductivity	EN ISO 10456 W/(m.K)	0.25	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105-B02 degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Impact sound insulation	EN ISO 717-2 dB	8	-	-	-	-
Chemical products resistance	EN ISO 26987	OK	OK	OK	OK	OK
Anti-bacterial activity (E.coli- S.aureus- MRSA)(4)	ISO 22196	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth
Surface treatment	-	ProtecSol® Control	SparClean®	SparClean®	-	-
TVOC after 28 days	ISO 16000-6 µg/m <sup>3</sup>	< 70	< 100	< 100	< 100	< 100
CE Marking						
CE	EN 14041	Bfl-s1	ES	DS	EN	EN

(1) The RRL pendulum wet test: wet is expressed as a Pendulum Test Value (PTV) and a Slip Resistance Value (SRV) to show that the test was carried out using a 4S rubber resistor pad in accordance with HSE guidance.

(2) The Esf (Enhanced Slip) designation shows that this product complies with the EN 13845 shod test.

(3) The Esb (Enhanced Slip) designation shows that this product complies with the EN 13845 barefoot test.

(4) The implementation of an effective cleaning method is the best defence against infection.



# Tarasafe Impression

## Contract Safety Flooring

UPDATED

- > Tough and durable multipurpose floor covering, ideal for contract applications
- > Slip resistant with a HSE compliant >36 PTV, >20 Rtm/Rz surface roughness and a R11 ramp test rating
- > A hygienic solution thanks to a revolutionary UV-cured ProtecSol® Control surface treatment for easy cleaning and maintenance
- > Stunning collection of modern and contemporary designs

### Wood



### Mineral



T Wear Group | HSE 36+ Slip Resistant | R11 Slip Resistant | 20 Roughness RTM / RZ

Compact | ProtecSol® Control | 100% Recyclable | Stocked for quick delivery see page 4 | Y = Light Reflectance Value (LRV) | Weld Rods see page 234



1110 Rivau Nature

# Tarasafe Ultra

## Contract Safety Flooring

UPDATED


- > Easy to clean and maintain compacted nonporous surface
- > Enhanced colour, design and brightness of mineral crystal particles
- > Stain and chemical resistant SparClean® surface treatment, no polish for life!
- > Suitable for most contract and commercial applications



Easy to cut



100% recyclable  
29% recycled content

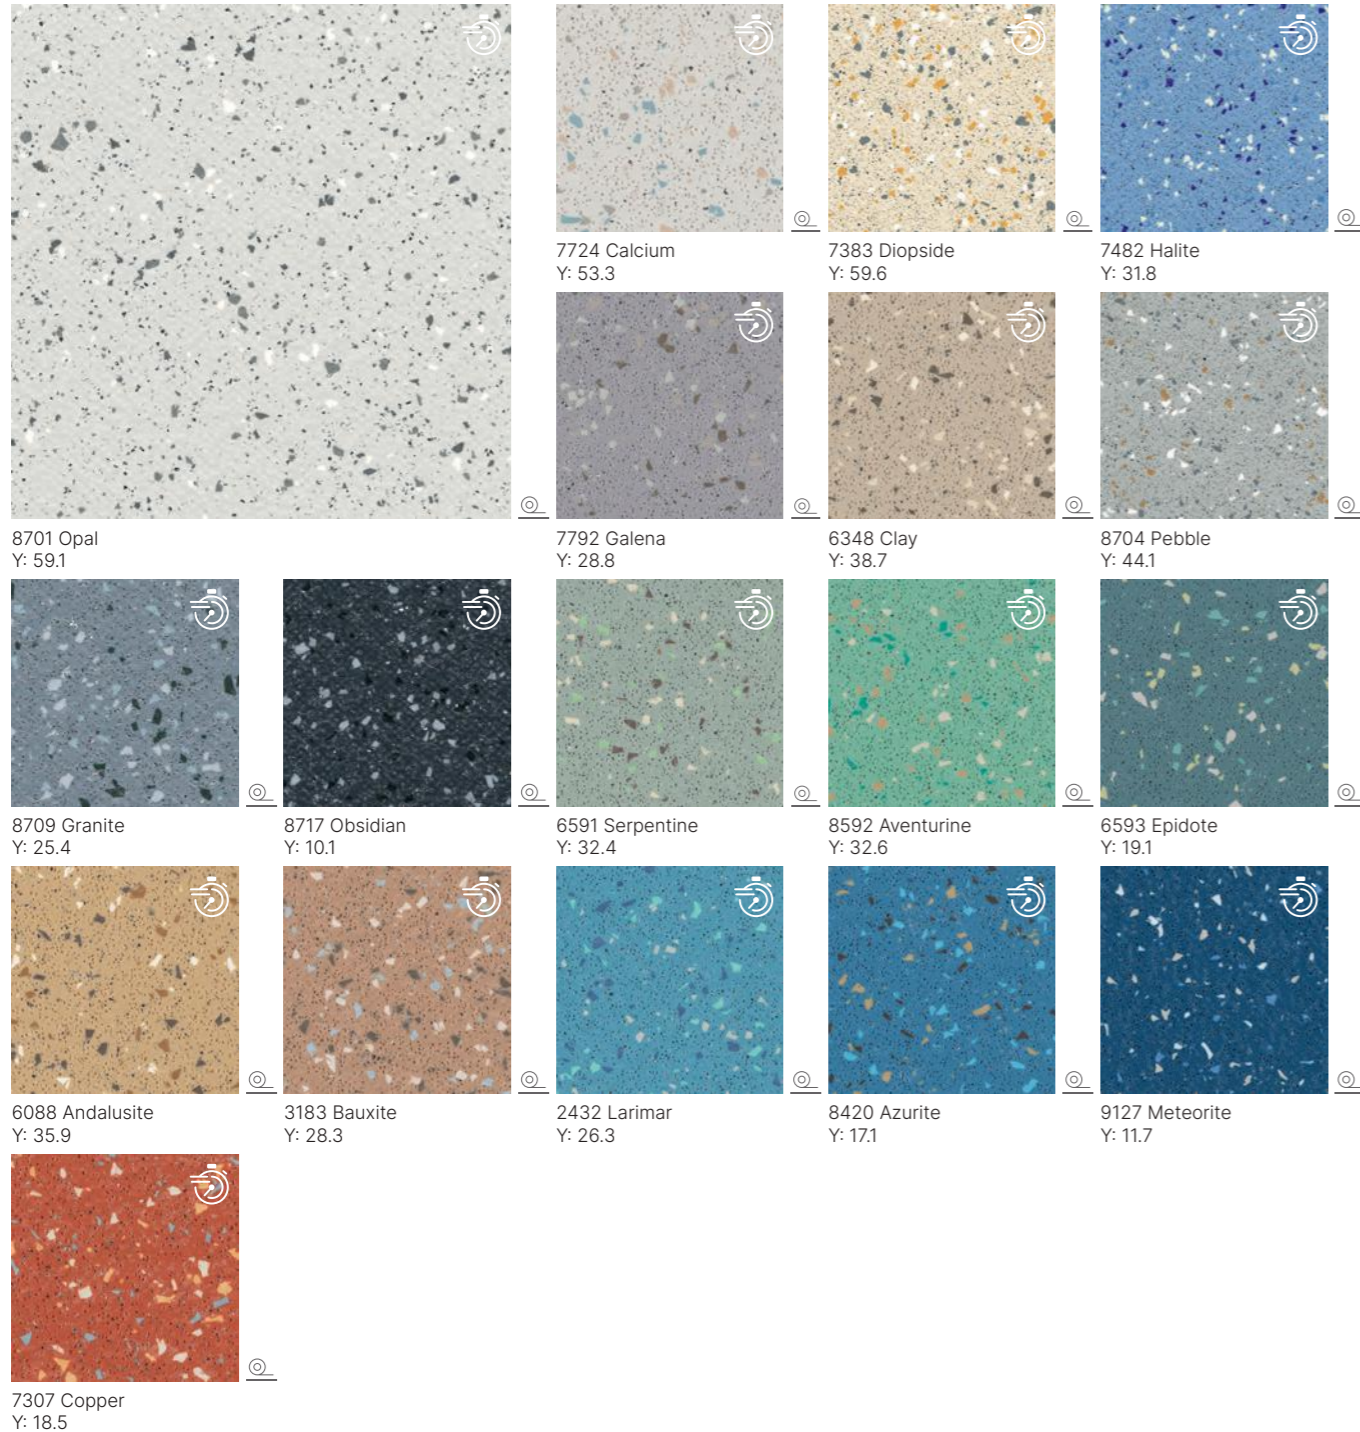

T Wear Group | HSE 36+ Slip Resistant | R10 Slip Resistant | 20 Roughness RTM / RZ | Y = Light Reflectance Value (LRV) | Weld Rods see page 234

Compact | SparClean® | Stocked for quick delivery see page 4



7724 Calcium

# Tarasafe Standard / Plus / Super


## Contract Safety Flooring

UPDATED


- > Easy to clean and maintain compacted nonporous surface
- > Enhanced colour, design and brightness of mineral crystal particles
- > SparClean® surface treatment for easier maintenance (Standard range only)




### Standard

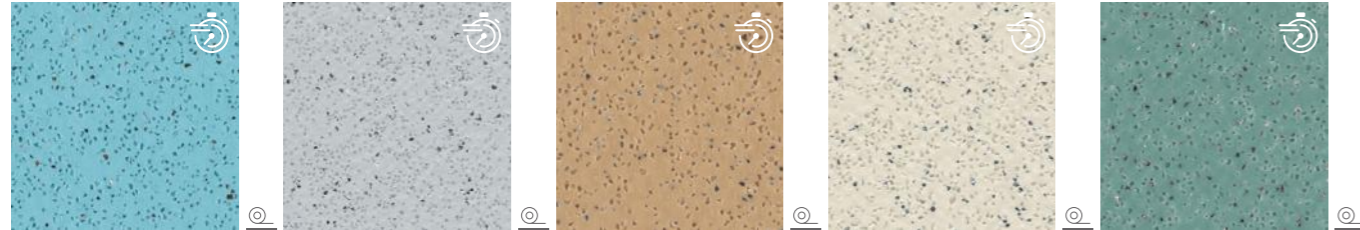

6245 Atoll Y: 41.1    7731 Marbre Y: 51.2    7315 Jute Y: 30.8    7618 Edelweiss Y: 57.9    6589 Leaf Y: 25.0

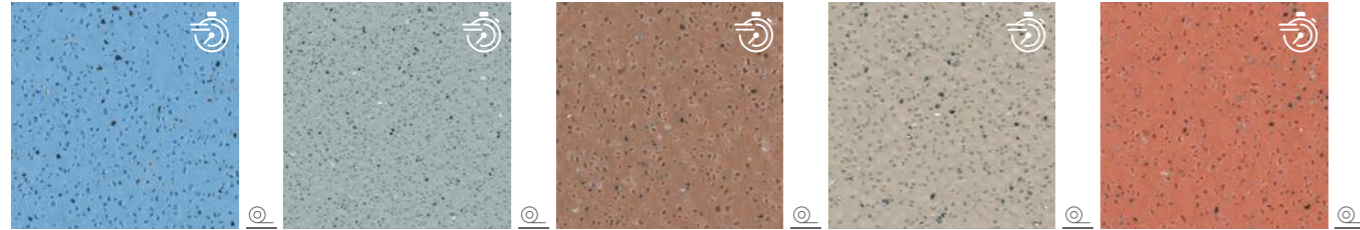


2430 Rain Drop Y: 32.5    7767 Dove Grey Y: 34.1    6084 Badian Y: 20.9    7386 Savana Y: 44.3    8102 Paprika Y: 21.9

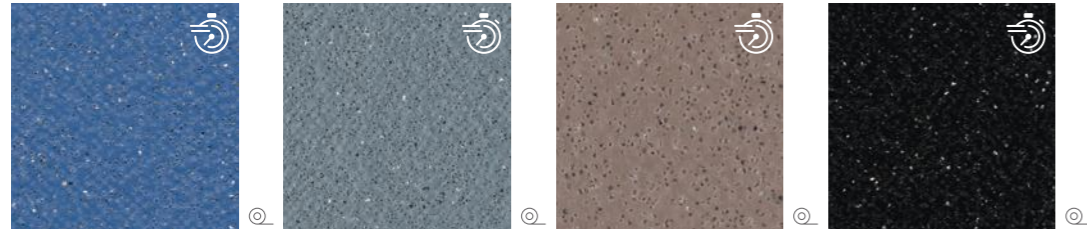


7709 Royal Blue Y: 15.3    7773 Storm Y: 21.3    6085 Grizzly Y: 19.2    7801 Noir Y: 5.7

### Plus

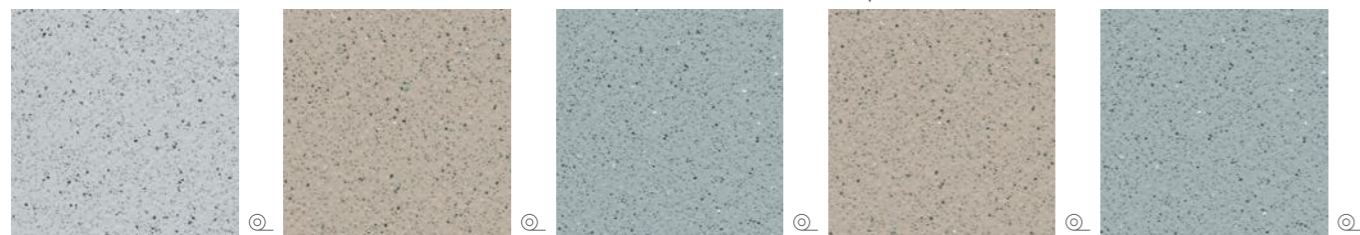

7731 Marbre Y: 51.2    7386 Savana Y: 44.0    7767 Dove Grey Y: 34.1    7386 Savana Y: 44.0    7767 Dove Grey Y: 34.1


### Super

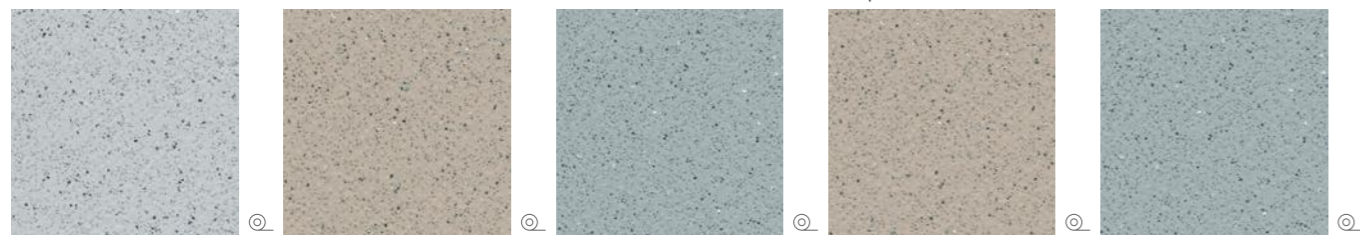

7731 Marbre Y: 51.2    7386 Savana Y: 44.0    7767 Dove Grey Y: 34.1    7386 Savana Y: 44.0    7767 Dove Grey Y: 34.1

T Wear Group    HSE 36+ Slip Resistant Standard    R10 Slip Resistant Standard / Plus    R12 Slip Resistant Super    20 Roughness RTM / RZ Standard

Compact    SparClean® Standard    Stocked for quick delivery see page 4    Y = Light Reflectance Value (LRV)    Weld Rods see page 234

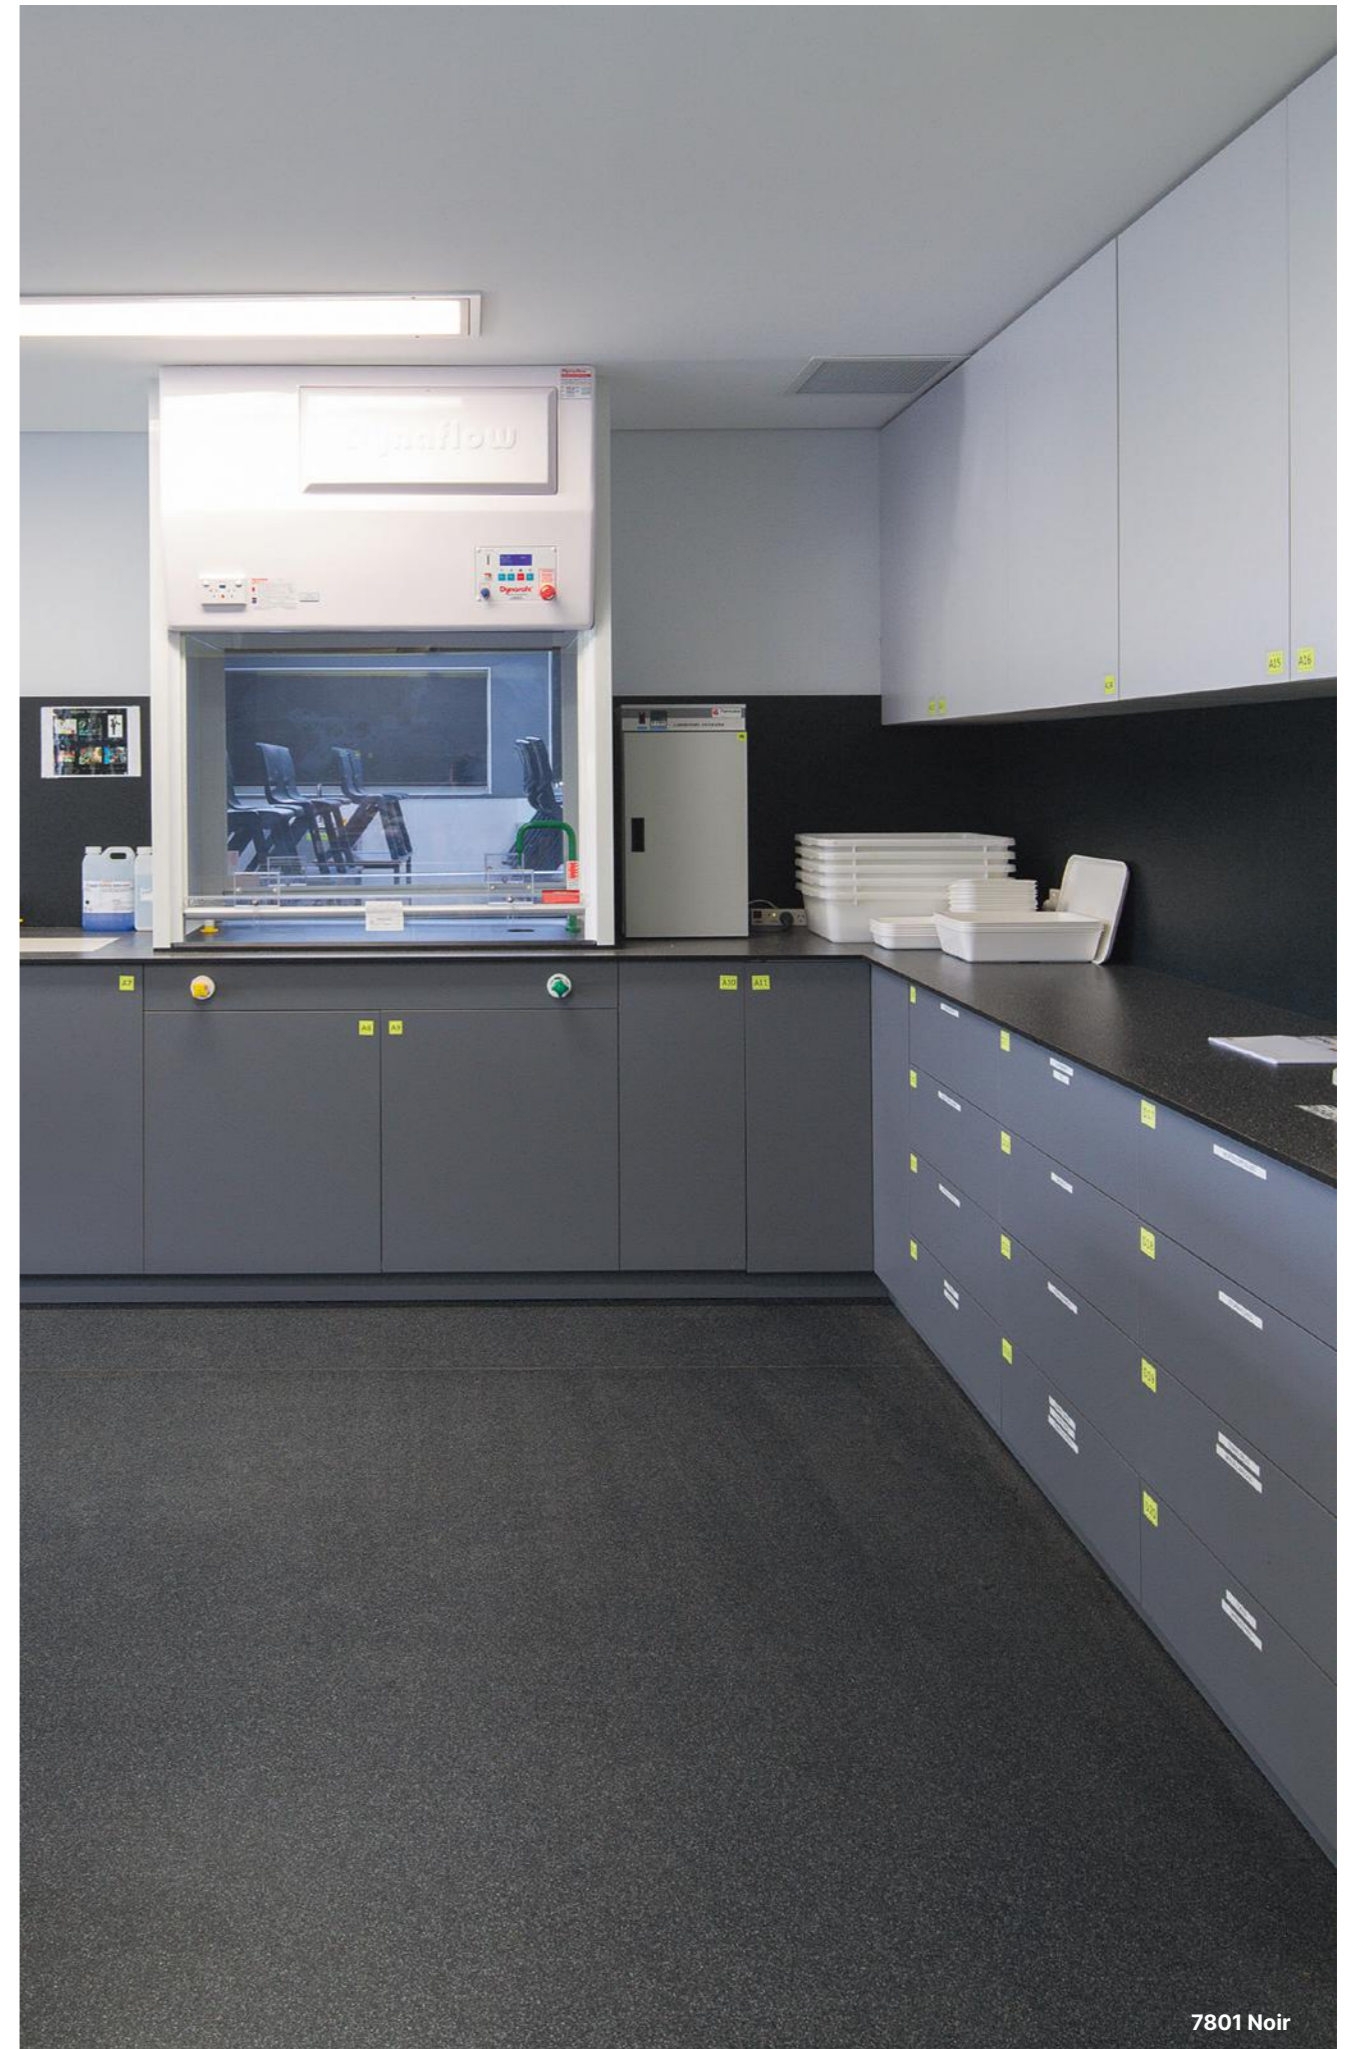

7801 Noir

# Shower Flooring

**Tarasafe H<sub>2</sub>O** is a new generation of non-studded slip resistant safety vinyl floor covering with a subtle design that the Dementia Services Development Centre at the University of Stirling has approved for use within a dementia-inclusive environment.

It provides exceptional barefoot comfort and is an ideal solution for wet rooms, bathrooms, shower and changing rooms.


**Tarasafe Ultra H<sub>2</sub>O** is an enhanced slip resistant safety vinyl floor covering with a raised emboss designed for applications where there are continuous wet areas.

It provides exceptional barefoot comfort and is an ideal solution for shower and changing rooms and any high-level risk wet areas where heavy duty safety flooring is required.



Tarasafe Ultra H<sub>2</sub>O slip resistant safety vinyl floor covering

7720 Iceberg



			Tarasafe H <sub>2</sub> O	Tarasafe Ultra H <sub>2</sub> O
<b>Description</b>				
Thickness	EN ISO 24346	mm	2.0 (on grainside)	2.0 (on grainside)
Wear layer thickness	EN ISO 24340	mm	0.85	1.0
Weight	EN ISO 23997	g/m <sup>2</sup>	2350	2400
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	lm	20	20
<b>Classification</b>				
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582
European classification	EN ISO 10874	class	34-43	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1
Slip resistance wet: shod	DIN 51130	class	R11	R11
Slip resistance wet: bare foot	DIN 51097	class	B	C
Slip resistance: pendulum test	BS 7976-2	PTV	> 50	> 36
<b>Performances</b>				
Wear resistance	EN 660.2	mm <sup>3</sup>	-	≤ 4.0
Wear group	NF 189	Group	-	P
Type binder content	ISO 10582	type	I	I
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6
Surface treatment	-	-	SparClean®	-
Chemical products resistance	EN ISO 26987	-	OK	OK
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 100	< 100
<b>CE Marking</b>				
CE	EN 15102	-		
	EN 14041			

**Accessories:** drains, floor/wall diminishing strip, cover former, weldable vinyl shower threshold, CA12 angle welding rods.

**Installation:** Installation should be carried out in accordance with local standards. Subfloor to be flat, smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise for 24 hours prior to installation at a room temperature between 18-24°C. All seams must be heat welded using matching Gerflor welding rod.

**Maintenance:** No emulsion dressings or polish required. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleanser.

Further installation and maintenance instructions are available from Gerflor.

# Tarasafe H2O

## Shower Flooring

NEW

- > Non-studded subtle design
- > Slip resistant safety flooring for wet and dry, barefoot and shod applications
- > Easy to clean and maintain thanks to the SparClean® surface treatment
- > Enhanced colour, design and brightness of mineral crystal particles




Easy to cut



100% recyclable  
29% recycled content




0031 Eacham  
Y: 34.3




0024 Peyto  
Y: 43.7




0025 Nile  
Y: 43.4




0033 Rhine  
Y: 29.7




0034 Zambezi  
Y: 19.9



0032 Malawi  
Y: 40.1



0035 Bacalar  
Y: 32.5



0036 Lagoa  
Y: 31.1




### Gerflor Tarasafe H2O

The Dementia Services Development Centre at the University of Stirling has approved Tarasafe H2O for use within a dementia-inclusive environment

HSE 50+ Slip Resistant | R11 Slip Resistant | 20 Roughness RTM / RZ | Shod Use | Barefoot Use

Compact | SparClean® | Stocked for quick delivery see page 4 | Y = Light Reflectance Value (LRV) | Weld Rods see page 234

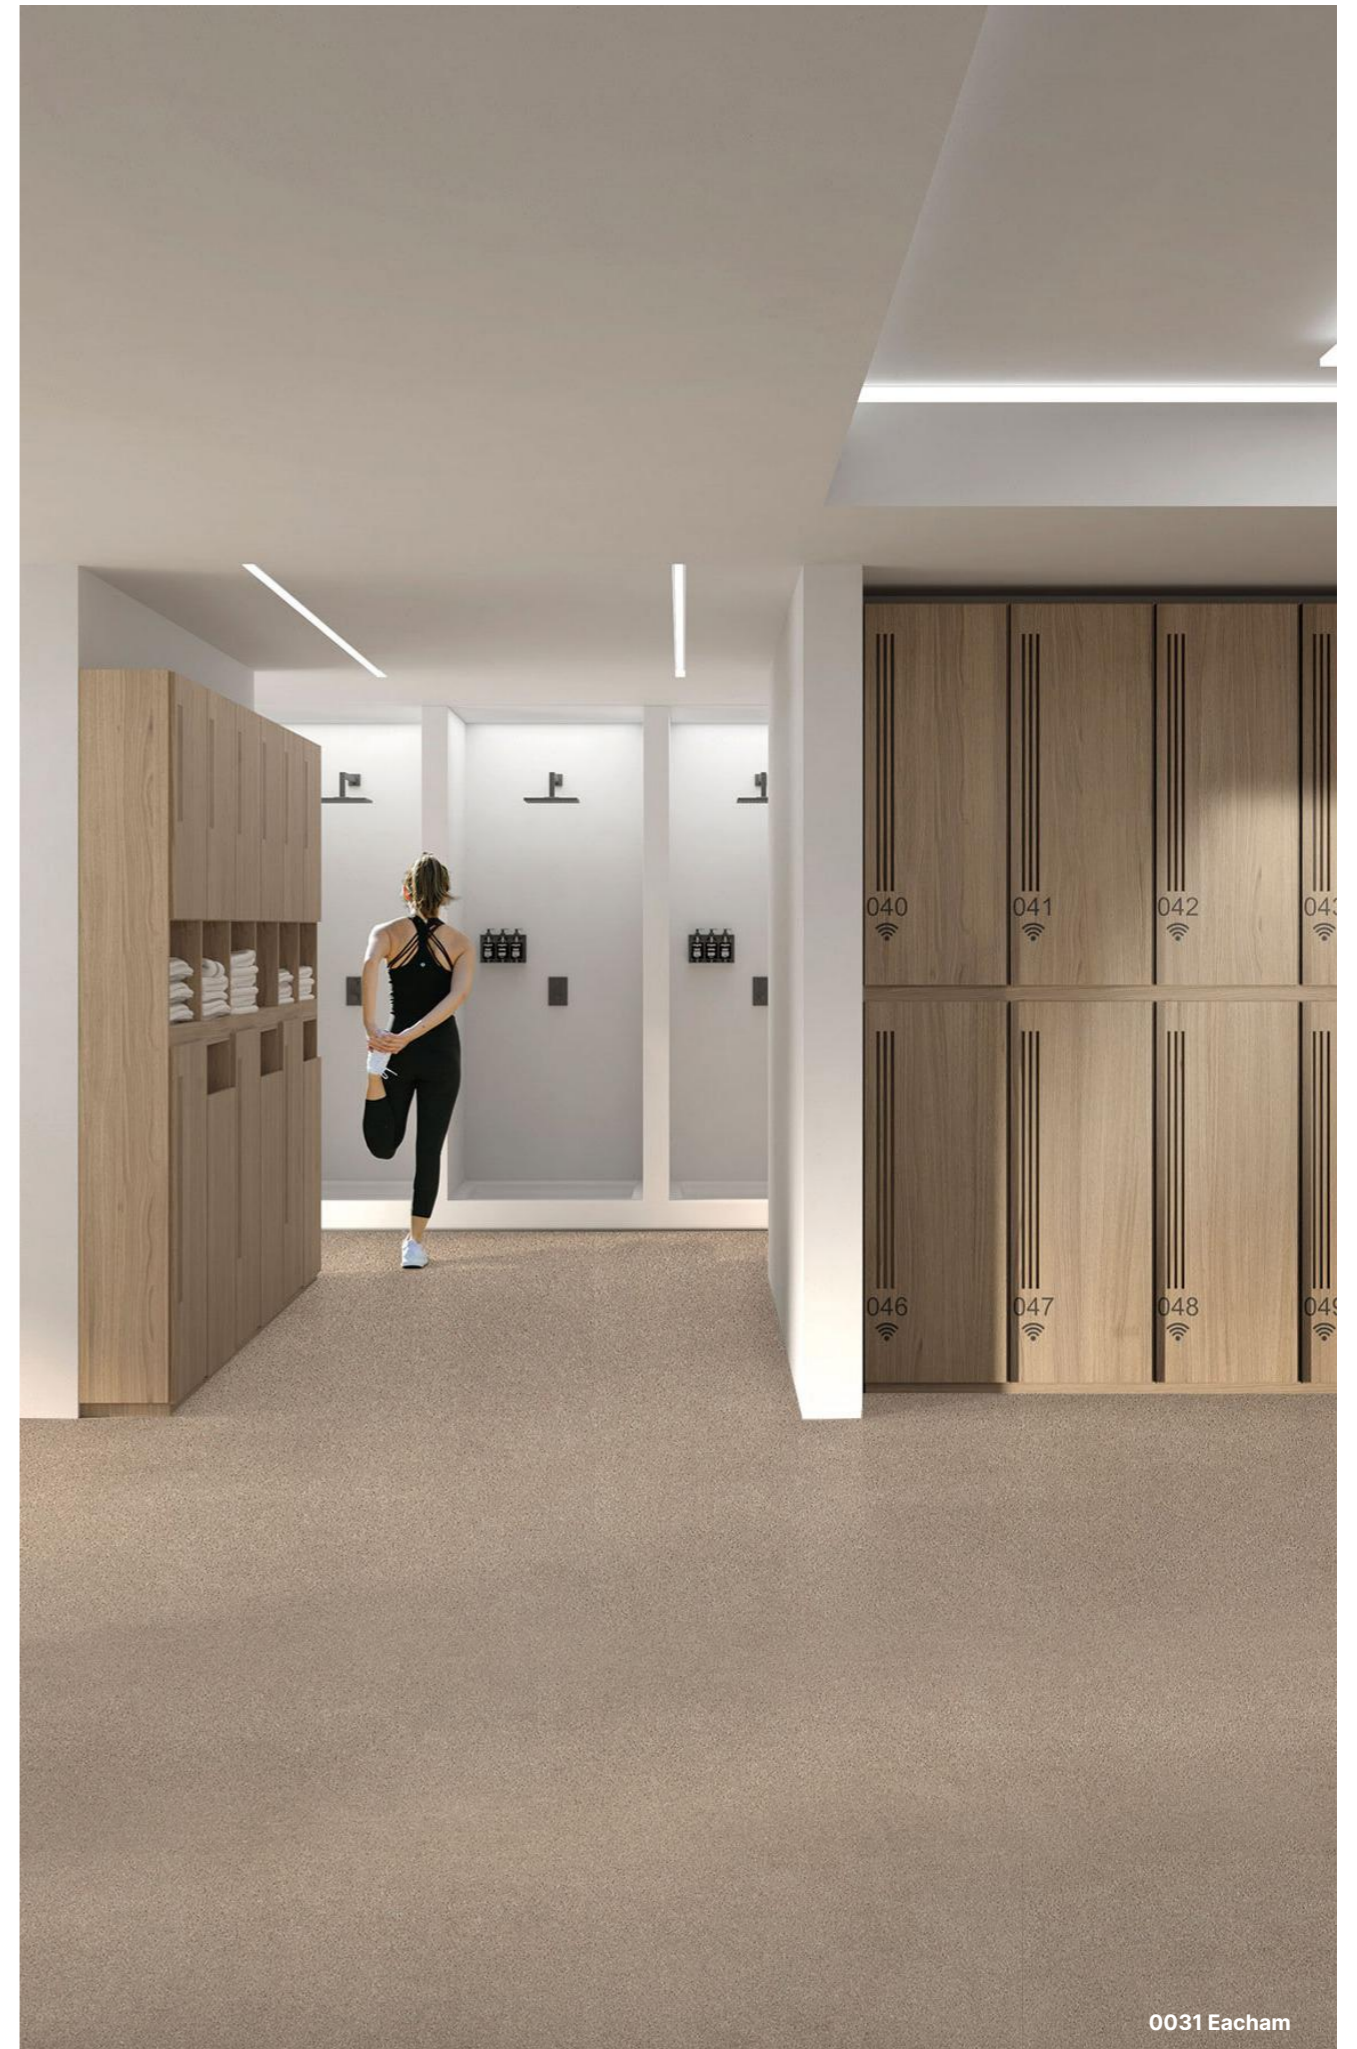

0031 Eacham

# Tarasafe Ultra H<sub>2</sub>O

## Shower Flooring

UPDATED


- > Slip resistant safety flooring for wet and dry, barefoot and shod applications
- > Easy to clean and maintain surface
- > Enhanced colour, design and brightness of mineral crystal particles




Easy to cut




100% recyclable  
29% recycled content

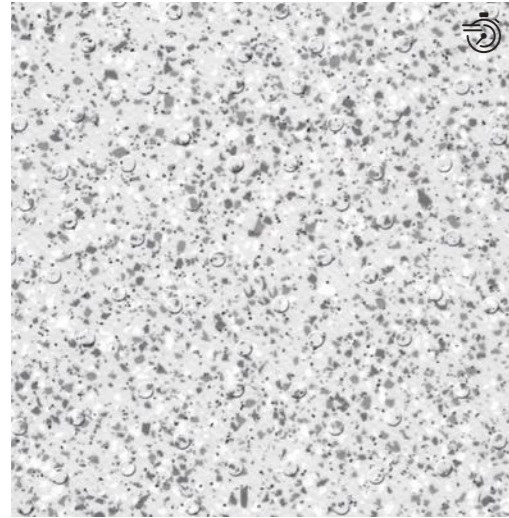


7720 Iceberg  
Y: 60.6




7413 Ocean Blue  
Y: 31.8



7746 Stone  
Y: 23.6



7732 Gravel  
Y: 9.7



7325 Seashore  
Y: 63



7720 Iceberg

P Wear Group | HSE 36+ Slip Resistant | R11 Slip Resistant | 20 Roughness RTM / RZ | Shod Use | Barefoot Use

Compact | 100% Recyclable | Stocked for quick delivery see page 4 | Y = Light Reflectance Value (LRV) | Weld Rods see page 234

# Wall Coverings

**Mural Revela** is an innovative wall covering solution designed for both fast-track renovations and new build projects. Available in tiles, panels and XXL panels, it can be installed over existing ceramic tiles and despite being only 5mm thick, Mural Revela is as resistant as ceramic tiles with the benefit of a warm touch.

The ultra-realistic designs mimic stone, cement, or marble, and the tongue and groove system ensures a 100% waterproof finish (when installed in accordance with Gerflor's installation guidelines), making it perfect for showers, wet rooms and bathrooms.

Mural Revela is made using up to 30% recycled content and is 100% recyclable. A choice of aluminium finishing profiles provides a complete solution for a high-end appearance.

**Mural Calypso** is a wall covering with a coloured backing for easy welding. It has excellent resistance to tearing, is hygienic with a washable surface and can be hot welded to the flooring thus reducing hospital borne infections. Available in a wide colour palette and range of nature-inspired designs.

**Mural Ultra Design** is a 2m width flexible printed wall covering vinyl sheet, which has a thickness of 1.5mm for an extended durability.

Fully resistant to impact (EN 259), Mural Ultra Design acts as a buffer against damage from beds and trolleys. It is ideal for use in hospitals, care institutions, dental and veterinary surgeries, schools, clean rooms, stores and supermarkets, warehouse and storage areas.



			Mural Revela	Mural Calypso	Mural Ultra Design
<b>Description</b>					
Thickness	-	mm	5.00	0.92	1.50
Wear layer thickness	-	mm	-	0.10	1.40
Weight	-	g/m <sup>2</sup>	Gloss 7500 / Matt 6750	1610	2550
Size / Format	-	cm	Tile 65 × 37.5 Panel 90 × 260 / XXL Panel 120 × 260	-	-
Width / Length of Sheet	EN 233	cm / lm	-	200 / 30	200 / 21
<b>Classification</b>					
Norm / Product specification	-	-	EN 15102	EN 15 102	EN 259-1
Fire resistance	EN 13501-1	class	D-s3,d0	B-s2,d0	B-s2,d0
<b>Performances</b>					
Curving after exposure to heat	ISO 23999-EN 434	mm	-	-	≤ 2
Colour fastness	EN 20 105-B02	degree	-	≥ 6	≥ 6
Surface treatment	-	-	OK	-	Protecsol®
Resistance to chemicals <sup>(1)</sup>	EN ISO 26987	-	-	OK	OK
Washability	EN 233	-	Washable	Washable and brushable	Washable and brushable
Particles emission	ISO 14644-1	class	-	-	Class 3
Anti-bacterial activity (E.coli- S.aureus- MRSA) <sup>(2)</sup>	ISO 22196	-	-	99% inhibits growth	99% inhibits growth
Impact resistance	EN 259-2	-	-	-	No burst or visible cracking
Scratching resistance	Sclerometre	-	-	-	No visible damage
Flexibility	EN ISO 24344	-	-	-	No damage, no cracking
Resistance of welded joints	EN 684	N/50mm	-	-	≥ 250
<b>Environment</b>					
Recyclability	-	-	100%	-	100%
Recycled content	-	-	up to 30%	-	up to 30%
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 100 (A+)	-	< 10
<b>CE Marking</b>					
<b>CE</b>			EN 15102	OK	OK

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.


(2) The implementation of an effective cleaning method is the best defence against infection.

# Mural Revela

## Wall Coverings - Shower Solutions

**NEW**

- > Wall covering available in tiles 65 × 37.5cm or panels 90 × 260cm and XXL 120 × 260cm
- > Hygienic and easy to install, decorative and hardwearing wall covering solution
- > Ultra-realistic designs in matte or glossy finish
- > 100% recyclable and made from recycled materials

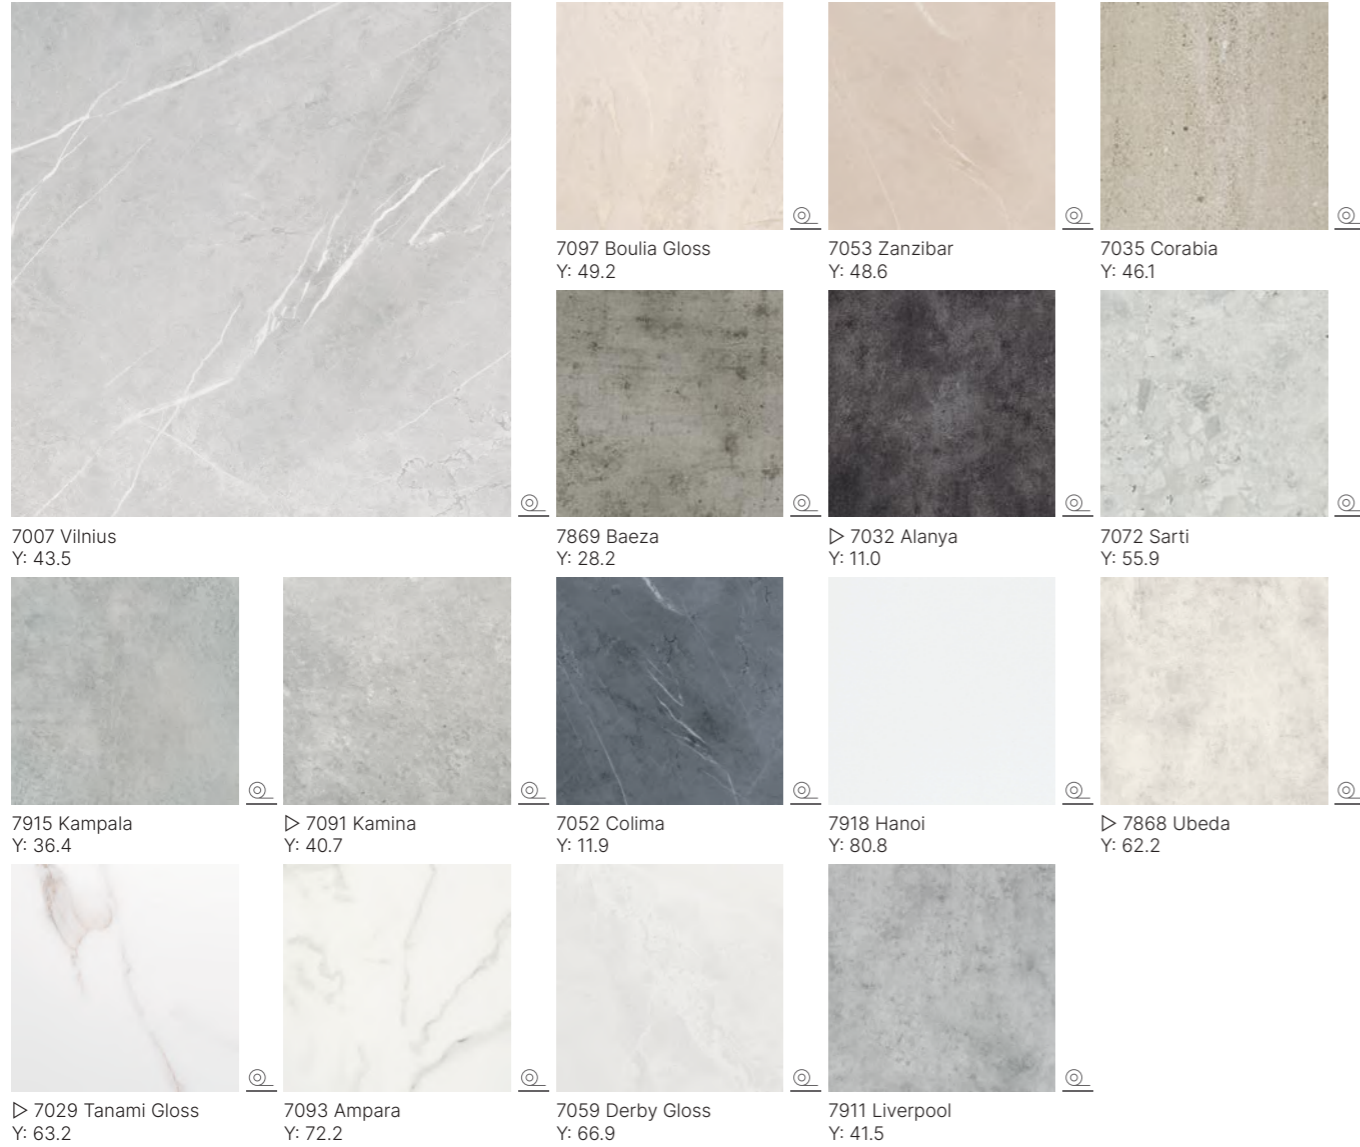


D-s3,d0 Fire Classification



Y = Light Reflectance Value (LRV)

▷ = Selected colours available in XXL panels

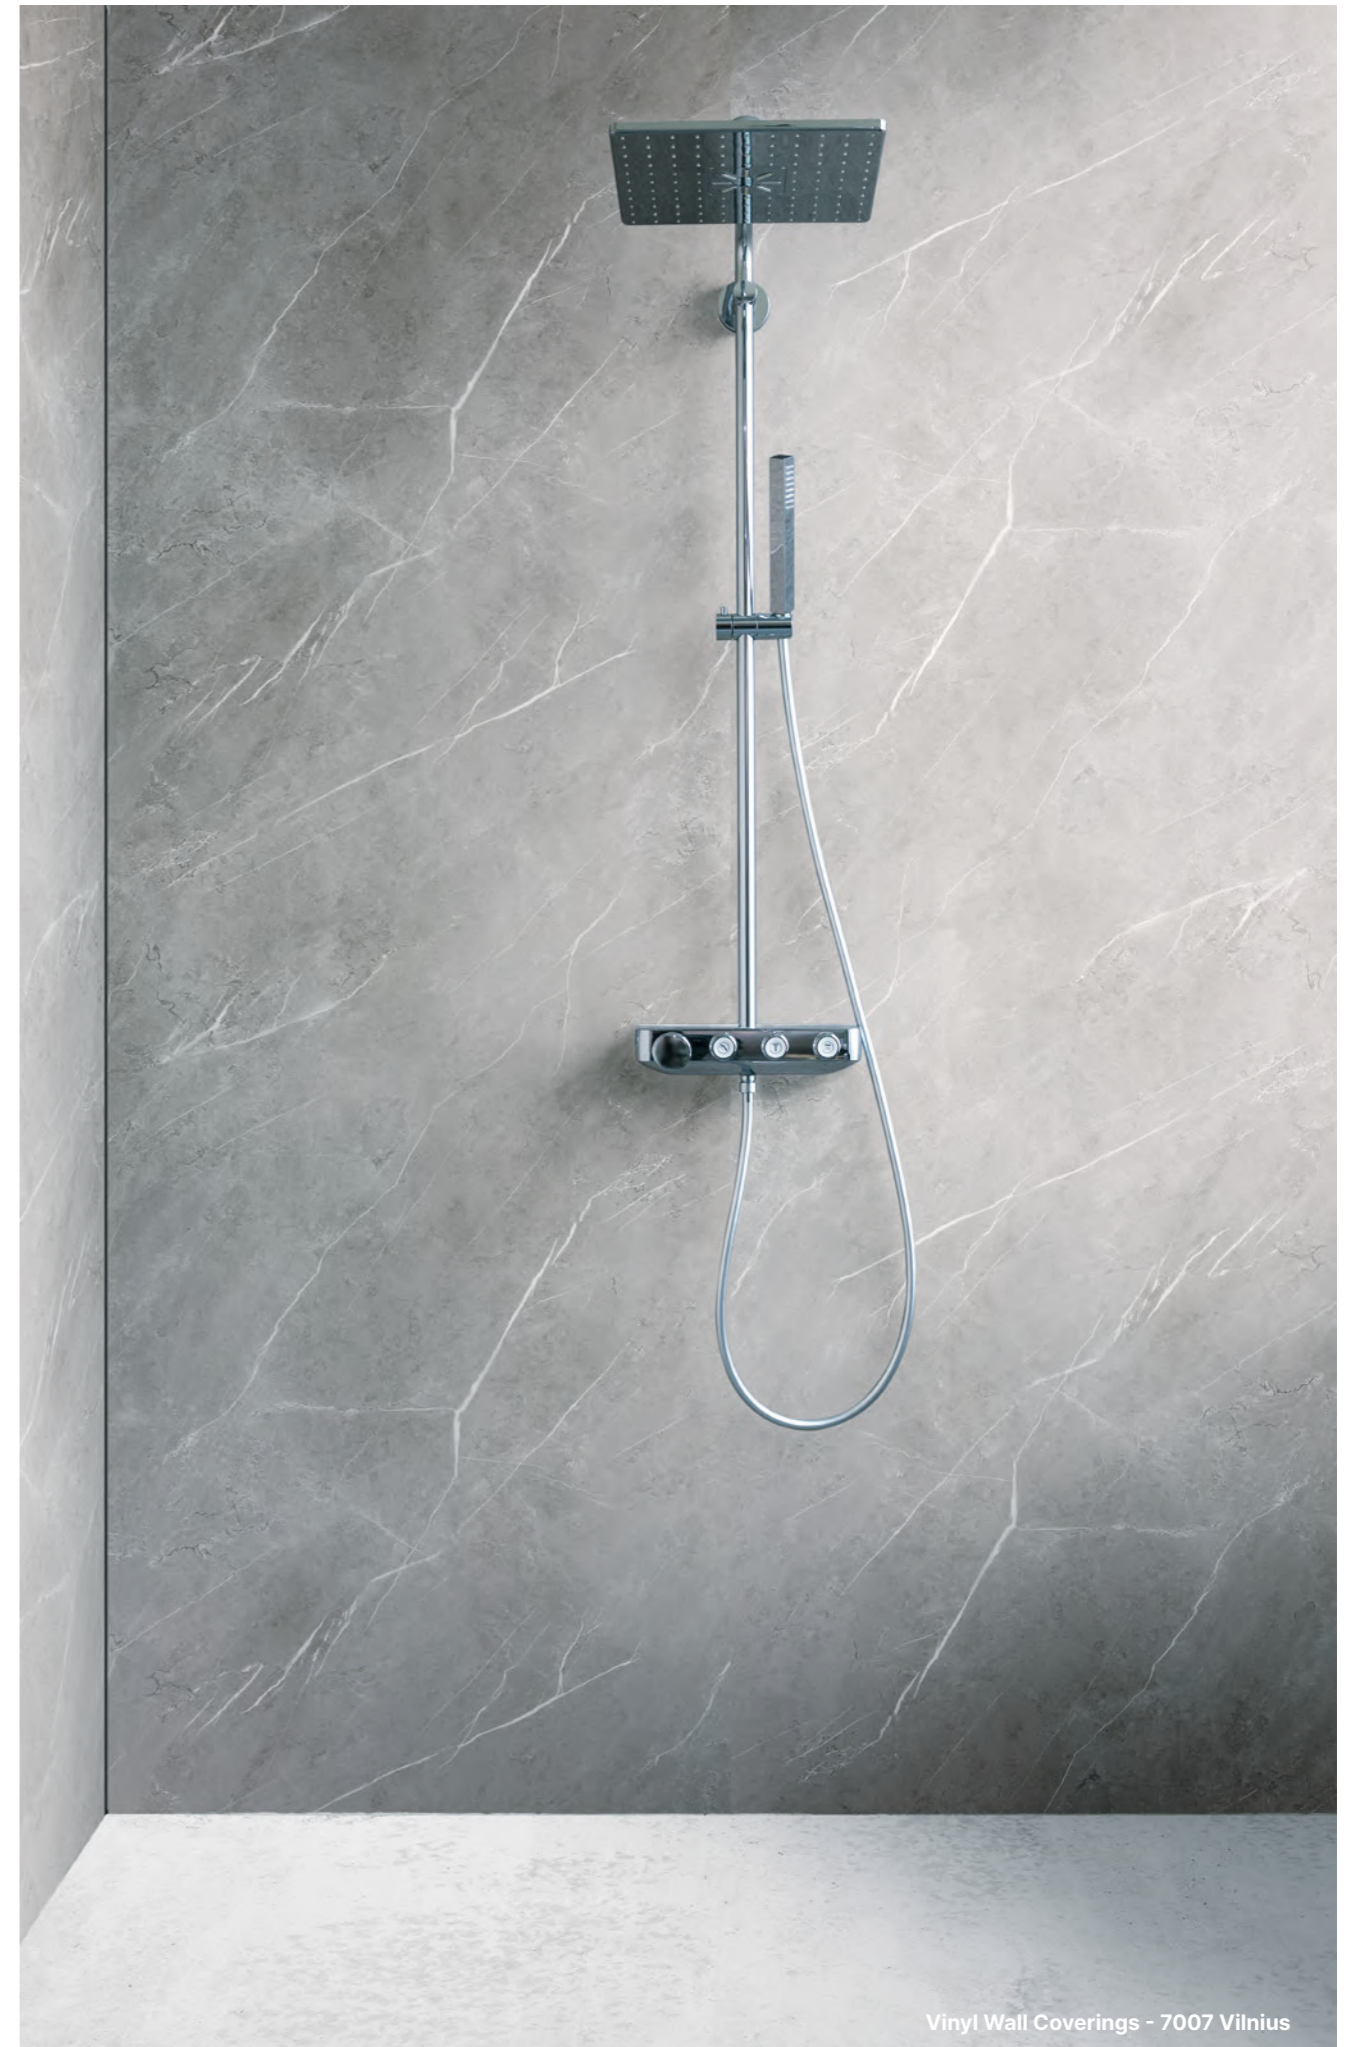

Vinyl Wall Coverings - 7007 Vilnius



# Mural Calypso

## Wall Coverings - Shower Solutions

UPDATED


- > Wall covering in 2m width roll
- > B-s2,d0 fire classification
- > 100% recyclable and made from recycled materials



7005 Blossom Snow Pearl  
Y: 75.6



7005 Blossom Snow Pearl



7711 Cloud Ice  
Y: 70.7



7010 Cloud Haze  
Y: 62.3



7408 Cloud Skyline  
Y: 56.8



7309 Cloud Lotus  
Y: 75.5



7311 Cloud Linen  
Y: 56.5



7201 Cloud Moonlight  
Y: 70.5




7017 Cloud Pink  
Y: 56.4



7019 Cloud Terra  
Y: 51



7018 Cloud Green  
Y: 53.8




7611 Uni Snow  
Y: 82.8



7020 Uni Ice  
Y: 71.7



7021 Uni Lotus  
Y: 71.9




7721 Manhattan Mist  
Y: 64.6



7734 Manhattan Concrete  
Y: 21.8




7740 Fabric Silk  
Y: 58.8

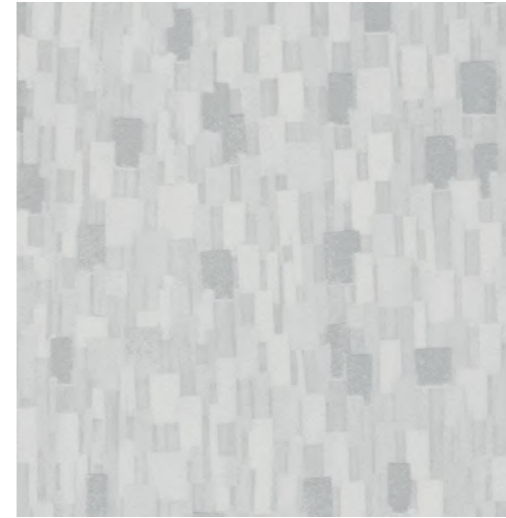

7004 Prism Haze Pearl  
Y: 60.2



7000 Bamboo Snow Pearl  
Y: 80.2



7002 Bamboo Lotus  
Y: 73.3




7022 Envol Snow Green  
Y: 75




7023 Envol Snow Skyline  
Y: 74.8



7015 Tropic Skyline  
Y: 60.1



7016 Tropic Terra Copper  
Y: 51.1



7013 Ginko Snow Gold  
Y: 77



7014 Ginko Snow Green  
Y: 77




7026 Arty Grey  
Y: 61.3



7025 Arty Beige  
Y: 58



7744 Nordic Milk  
Y: 67.5



7027 Verona  
Y: 65.2



7024 Venice  
Y: 68



B-s2,d0 Fire Classification

Y = Light Reflectance Value (LRV)

Weld Rods see page 234

# Mural Ultra Design

## Wall Coverings - Other


- > Wall covering in 2m width roll
- > Hygienic and easy to maintain thanks to the ProtecSol surface treatment
- > B-s2,d0 fire classification
- > 100% recyclable and made from recycled materials



8005 Blossom Snow Pearl  
Y: 78.8



8011 Lichen  
Y: 60.6



8711 Ice  
Y: 67



8010 Haze  
Y: 62.3



8408 Skyline  
Y: 56.1



8309 Lotus  
Y: 71




8611 Snow  
Y: 80.3



8744 Nordic Milk  
Y: 65.6




8740 Fabric Silk  
Y: 54.8



8721 Manhattan Mist  
Y: 56.7



8002 Bamboo Lotus  
Y: 73.9



8000 Bamboo Snow Pearl  
Y: 80.7

B-s2,d0 Fire Classification



ProtecSol®



Y = Light Reflectance Value (LRV)



Wall Coverings - 8005 Blossom Snow Pearl

# Residential Slip Resistant Flooring

**Griptex** is a warm and comfortable slip resistant vinyl flooring with a unique GFT polyester textile backing that is specifically designed for housing & renovation, it's easy to install textile backed flooring can be loose laid up to 35m<sup>2</sup>. It is slip resistant to HSE guidelines and has an excellent acoustic rating of 16dB. It is water resistant from above and below and has a hygienic and easy to clean **pureclean** surface that doesn't trap dirt and needs less water and detergent to clean.

**Texline** is tough vinyl flooring with a unique GFT patented textile backing system that gives higher warmth and comfort underfoot, and is safer, easier to clean, quieter and more hygienic than standard vinyl flooring. Texline is available in a range of stunning modern designs and colourways that can be used in any room in your home.



GFT is a textile backing system that has many benefits including higher warmth and comfort underfoot, sound deadening qualities and it can be laid over most existing floors by evening out small imperfections in the sub-floor, reducing the need for extensive and time consuming floor preparation - unroll it, it's laid!

**pureclean** Unique to Gerflor products, **pureclean** is a tough, easy to clean, slip resistant PU finish that is carefully selected to enhance the beauty and character of the floor.



Beautiful and practical collections that are specifically designed for renovation and new build projects

1179 Yoda Beige



Description	Griptex		Texline	
	GFT Backing		GFT Backing	
Thickness	EN ISO 24346	mm	2.9	2.9
Wear layer thickness	EN ISO 24340	mm	0.35	0.35
Weight	EN ISO 23997	g/m <sup>2</sup>	2000	2000
Width of sheet	EN ISO 24341	cm	200 / 300 / 400	200 / 300 / 400
Length of sheet	EN ISO 24341	lm	+/- 25	+/- 25
<b>Classification</b>				
Norm / Product specification	-	-	EN ISO 26986	EN ISO 26986
European classification	EN ISO 10874	class	23-31	23-32
Fire rating	EN 13501-1	class	Cfl-s1	Cfl-s1
Slip resistance wet	DIN 51130	class	R10	R10
Slip resistance: pendulum test	BS 7976-2	PTV	≥ 36	-
Surface roughness	Rtm/Rz	µm	≥ 20	-
<b>Performances</b>				
Wear group	-	group	T	T
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40	≤ 0.40
Dimensional stability (average measured value)	-	%	0.05	0.05
Residual indentation (requirement)	EN ISO 24343-2	mm	≤ 0.35	≤ 0.35
Residual indentation (average measured value)	-	mm	0.20	0.20
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6
Impact sound insulation	EN ISO 717-2	dB	16	16
Surface treatment	-	-	pureclean GripX	pureclean
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 100	< 100
Domestic warranty	-	years	12	15
<b>CE Marking</b>				
CE	EN 14041			

# Griptex

## Slip Resistant Vinyl Flooring

- > Slip resistant to HSE standards
- > Hygienic and easy to clean surface
- > Tough and durable, 12 year domestic warranty
- > Patented GFT polyester backing



2256 Opera Medium




2260 Empire Dark Brown



2258 Hudson Grey



2266 Empire Grey



2263 Savannah Sand




2264 Savannah Medium




2265 Savannah Clear



1205 Oxyd Anthracite



0405 Chene Medium




1104 Cajou Nut




1237 Cajou Sun




2262 Lux Brown




0836 Verone Grey




1284 Verone Light Grey



2257 Shade Light




2259 Shade Medium Grey



2261 Shade Dark Grey



0447 Cassiopee Grass



0496 Ardoise Black



0873 Offset Beige

T Wear Group | HSE 36+ Slip Resistant | R10 Slip Resistant | 16<sub>dB</sub> Quiet Underfoot



Pureclean GripX



2256 Opera Medium

# Texline

## Slip Resistant Vinyl Flooring

UPDATED

- > Quick and easy to install
- > Easy to clean, slip resistant surface
- > Tough and durable, 15 year domestic warranty
- > Patented GFT polyester backing




2307 Azay Gold




2013 Sherwood Blond



2017 Sherwood Grey




2014 Sherwood Dark




1749 Timber Light



1740 Timber Naturel




2308 Azay Light Grey




2309 Azay Beige



2400 Patina Charcoal



2401 Patina Cream



2399 Fjord Cream



1949 Fjord Light Grey



2011 Fjord Black



1955 Provence Creme



1981 Provence Black & White

T Wear Group | R10 Slip Resistant | 16<sub>dB</sub> Quiet Underfoot



Pureclean



2307 Azay Gold

# Homogeneous Flooring



The well-established **Mipolam** range already has an outstanding reputation for its performance in health and education buildings.


The ever popular Mipolam Symbioz™ range, incorporating 100% bio-based plasticisers, has recently been updated to offer a wider range of contemporary colours and designs for these applications.

The Mipolam range is a wide and flexible range of high performing homogeneous compacted floor coverings with all but the Classic products treated with Evercare™, an exclusive surface treatment (the latest pioneering technology on the market).

The vinyls are scuff resistant and need no waxing or polishing to maintain their appearance and colour brightness for years.

The combination of Evercare™ and anti-bacterial and fungicidal treatments also ensures that stains such as blood and iodine can be safely and hygienically removed with minimum water and detergent required. This reduces maintenance costs and lowers the environmental impact.

Suitable for use in most general public areas, schools, offices, indoor leisure centres, factory floors and storage areas, hospital wards and corridors, "clean rooms" and computer suites, where an aseptic environment is required.

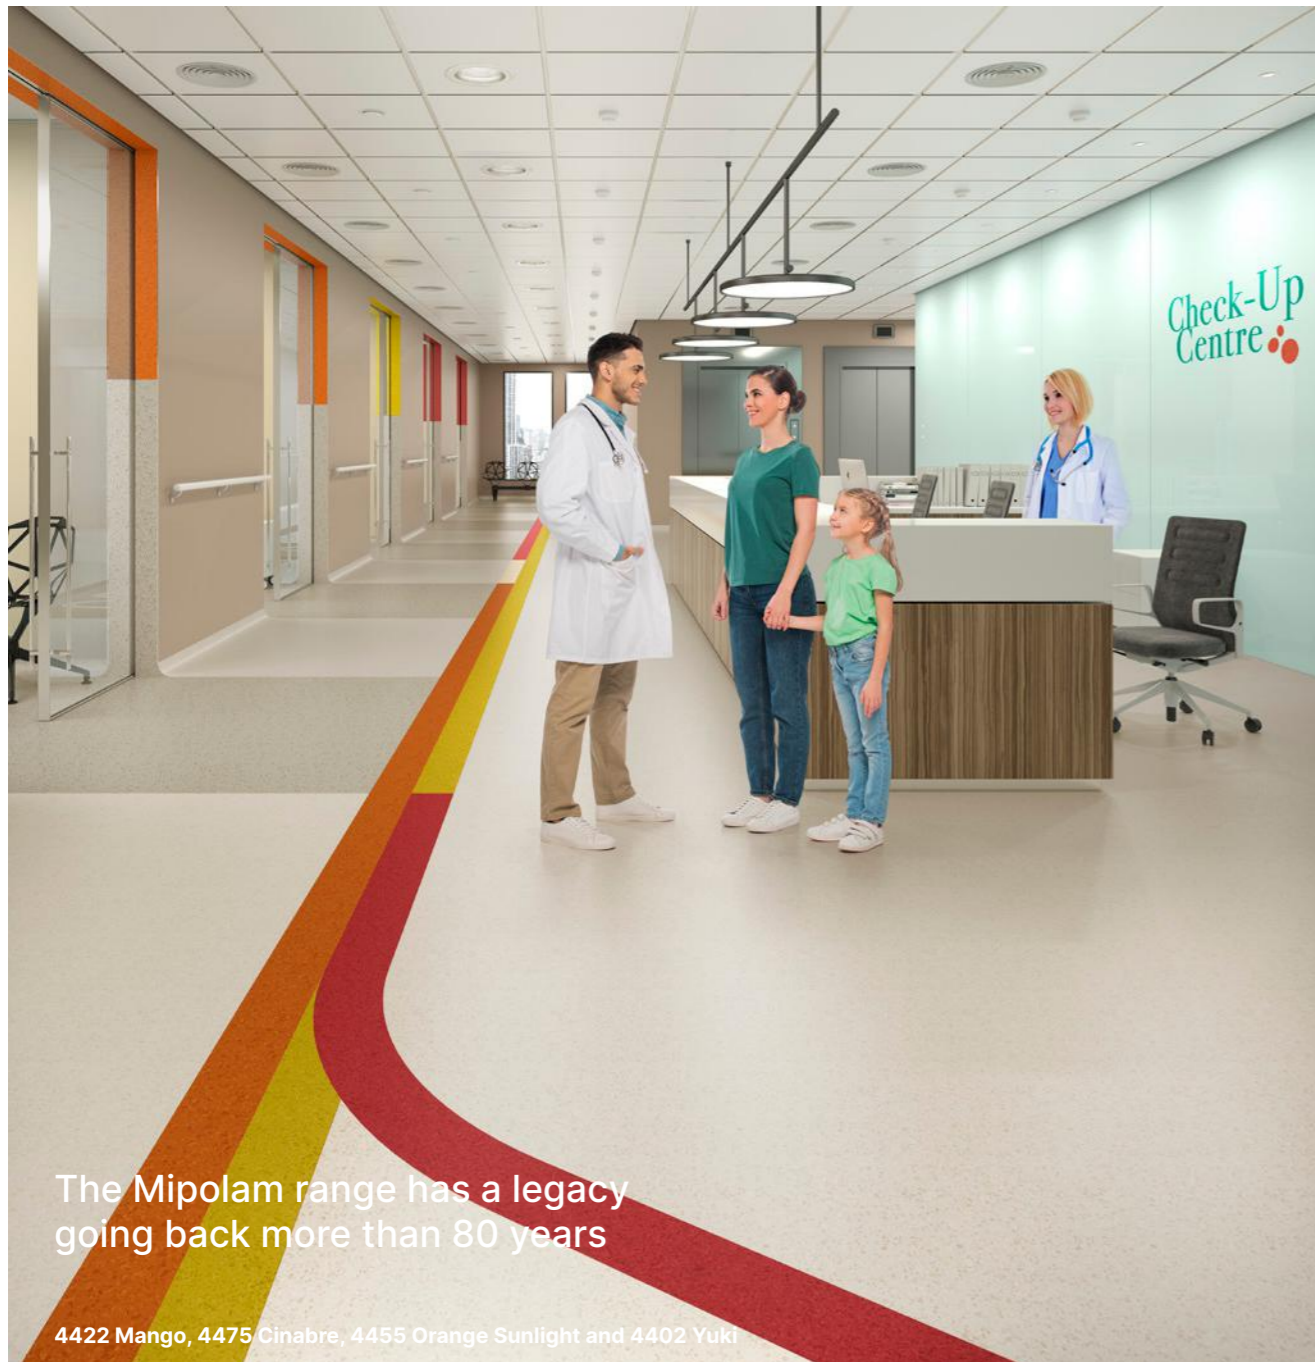

The Mipolam range has a legacy going back more than 80 years

4422 Mango, 4475 Cinabre, 4455 Orange Sunlight and 4402 Yuki



		Mipolam								
		Symbioz™	Planet	Accord	Affinity	Cosmo	Troplan	Classic		
<b>Description</b>										
Thickness	EN ISO 24346	mm	2.0	2.0	2.0	2.0	2.0	2.0	1.5	2.0
Weight	EN ISO 23997	g/sqm	2595	2700	2790	2800	3000	3300	2520	3300
Width of sheet	EN ISO 24341	cm	200	200	200	200	200	200	200	200
Length of sheet	EN ISO 24341	lm	20	20	20	20	20	20	20	20
Tile size	EN ISO 24342	mm	-	608 × 608 <sup>(1)</sup>	608 × 608 <sup>(1)</sup>	608 × 608 <sup>(1)</sup>	608 × 608 <sup>(1)</sup>	608 × 608 <sup>(1)</sup>	-	300 × 300 <sup>(1)</sup> 608 × 608
Number of tiles per pack	-	-	-	20	20	20	20	20	-	50 / 20
<b>Classification</b>										
Norm / Product specification	-	-	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581
European classification	EN ISO 10874	class	34-43	34-43	34-43	34-43	34-43	34-43	23-31	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2	< 2	< 2	< 2	< 2
<b>Performances</b>										
Type binder content	EN ISO 10581	type	I	I	I	I	I	II	II	II
Dimensional stability	EN ISO 23999	%	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25
Impact sound insulation	EN ISO 717-2	dB	5	5	5	5	5	4	4	4
Residual indentation	-	mm	≈ 0.02	≈ 0.02	≈ 0.02	≈ 0.02	≈ 0.02	≈ 0.03	≈ 0.03	≈ 0.03
Slip resistance wet	DIN 51130	class	R9	R9	R9	R9	R9	R9	-	-
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 7	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	OK	OK	OK	OK	OK
Anti-bacterial activity (E.coli- S.aureus- MRSA) <sup>(2)</sup>	ISO 22196	-	99% inhibits growth	99% inhibits growth	99% inhibits growth	99% inhibits growth	99% inhibits growth	99% inhibits growth	OK	OK
Surface treatment	-	-	Evercare™	Evercare™	Evercare™	Evercare™	Evercare™	Evercare™	PUR	PUR
TVOC after 28 days	ISO 16000-6	µg/m³	<10	<10	<10	<10	<10	<10	<10	<10
<b>CE Marking</b>										
CE		EN 14041								


(1) Products available in tiles for a minimum quantity order of 500sqm.

(2) The implementation of an effective cleaning method is the best defence against infection.

# Mipolam Symbioz™

## Homogeneous Flooring

- > The highest durability with a product life expectancy of more than 20 years
- > Exclusive bio-based plasticiser, 100% recyclable and manufactured from an organic source
- > Revolutionary Evercare™ surface treatment providing chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

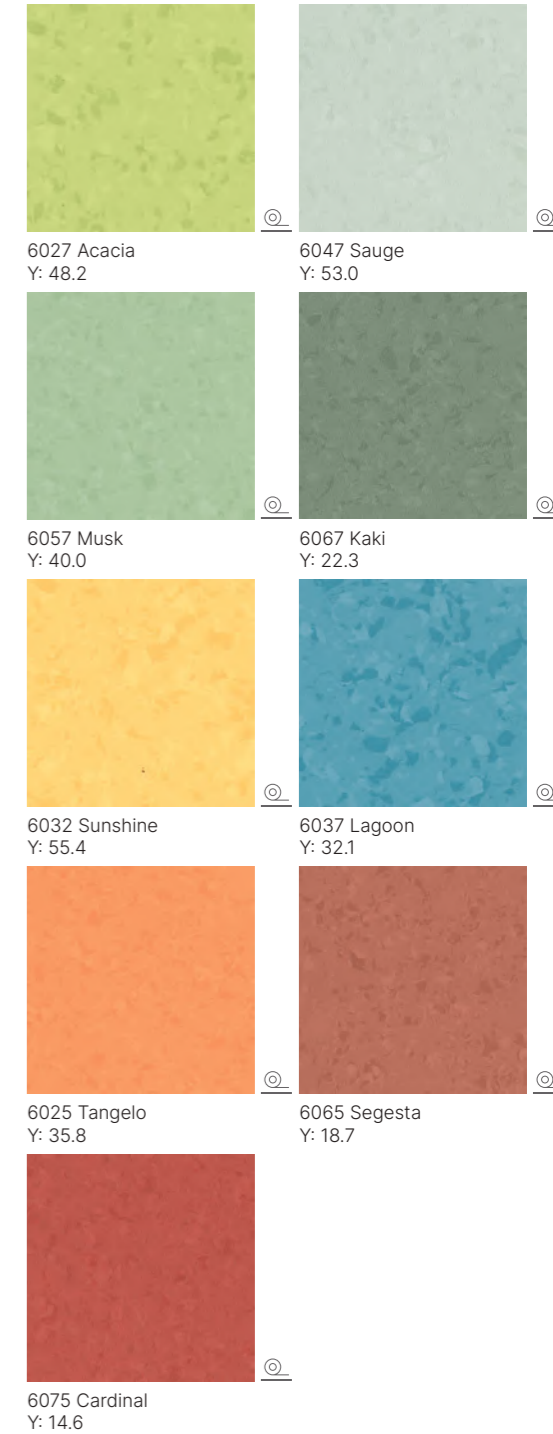


Y = Light Reflectance Value (LRV) | Weld Rods see page 234

# Mipolam Planet

## Homogeneous Flooring

- > Suitable for heavy traffic areas
- > Available in tile and sheet format (A 500m<sup>2</sup> minimum order applies to tiles)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

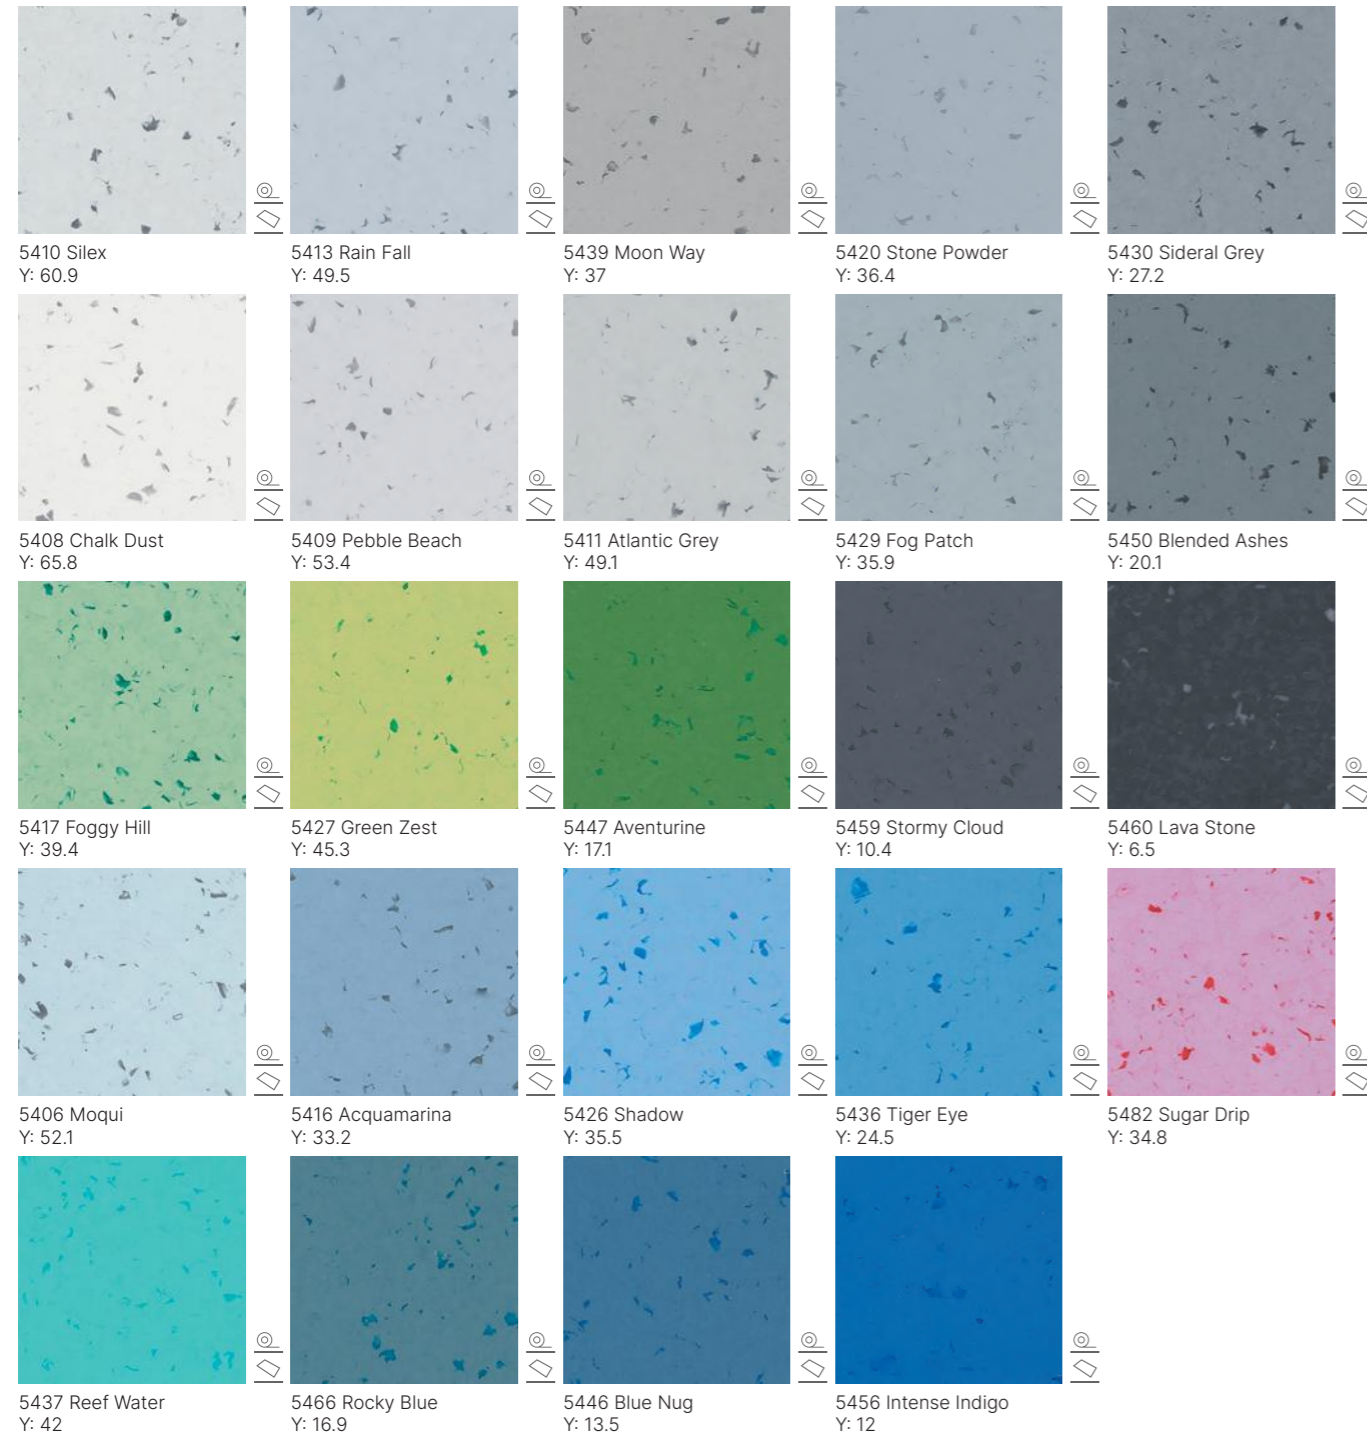

Tiles 608 x 608mm  
 Min order quantity 500m<sup>2</sup>

Evercare™

100%  
 Recyclable

Y = Light Reflectance Value (LRV)

Weld Rods  
see page 234



5413 Rain Fall / 5456 Intense Indigo



# Mipolam Planet

## Homogeneous Flooring

- > Suitable for heavy traffic areas
- > Available in tile and sheet format (A 500m<sup>2</sup> minimum order applies to tiles)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

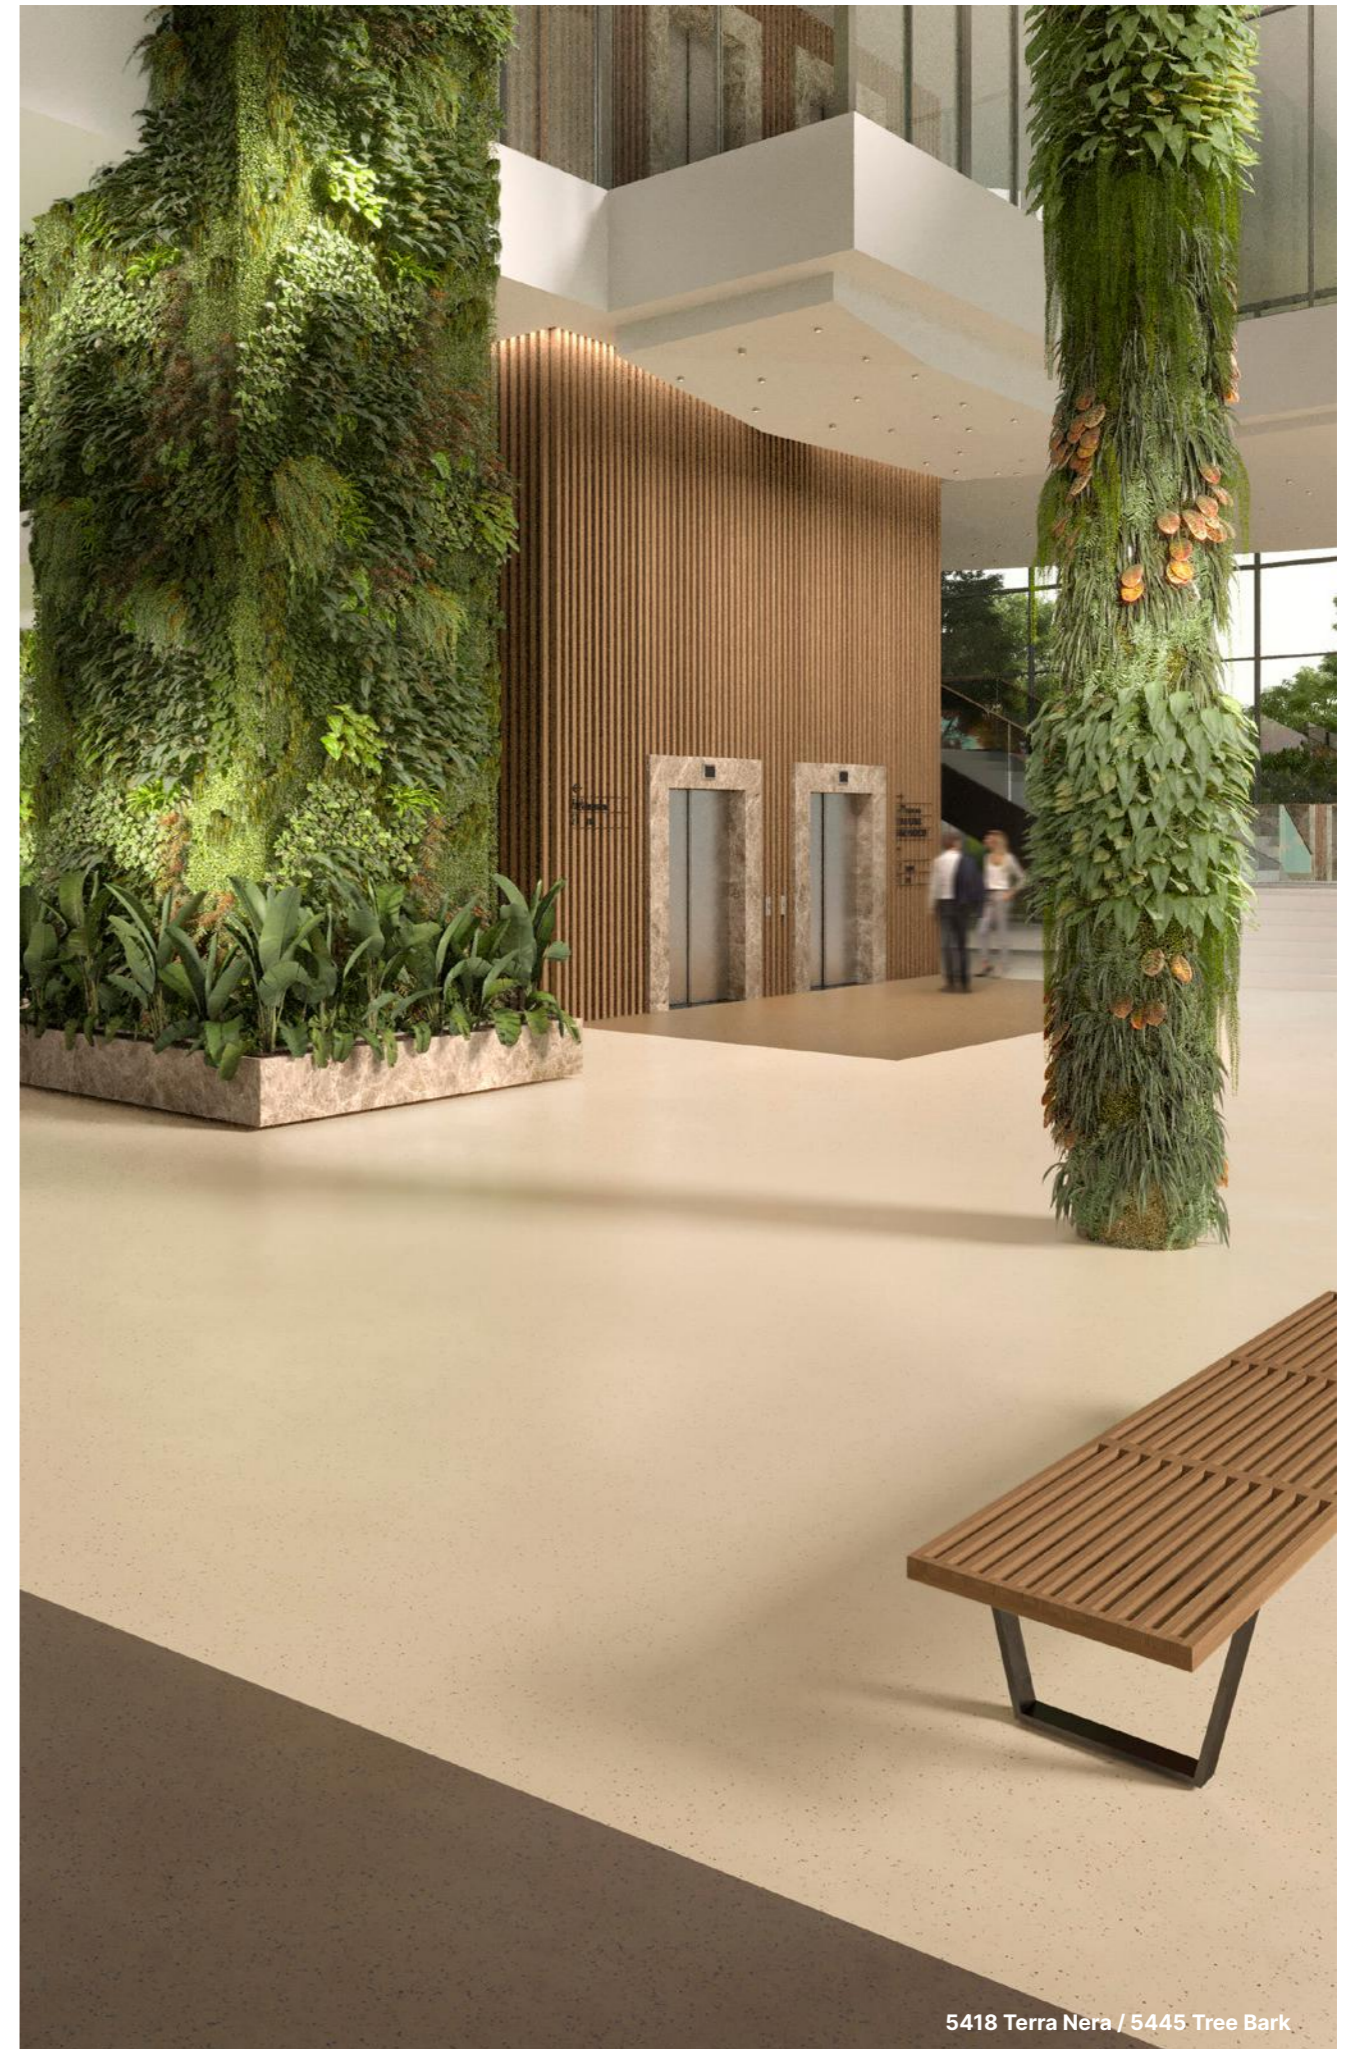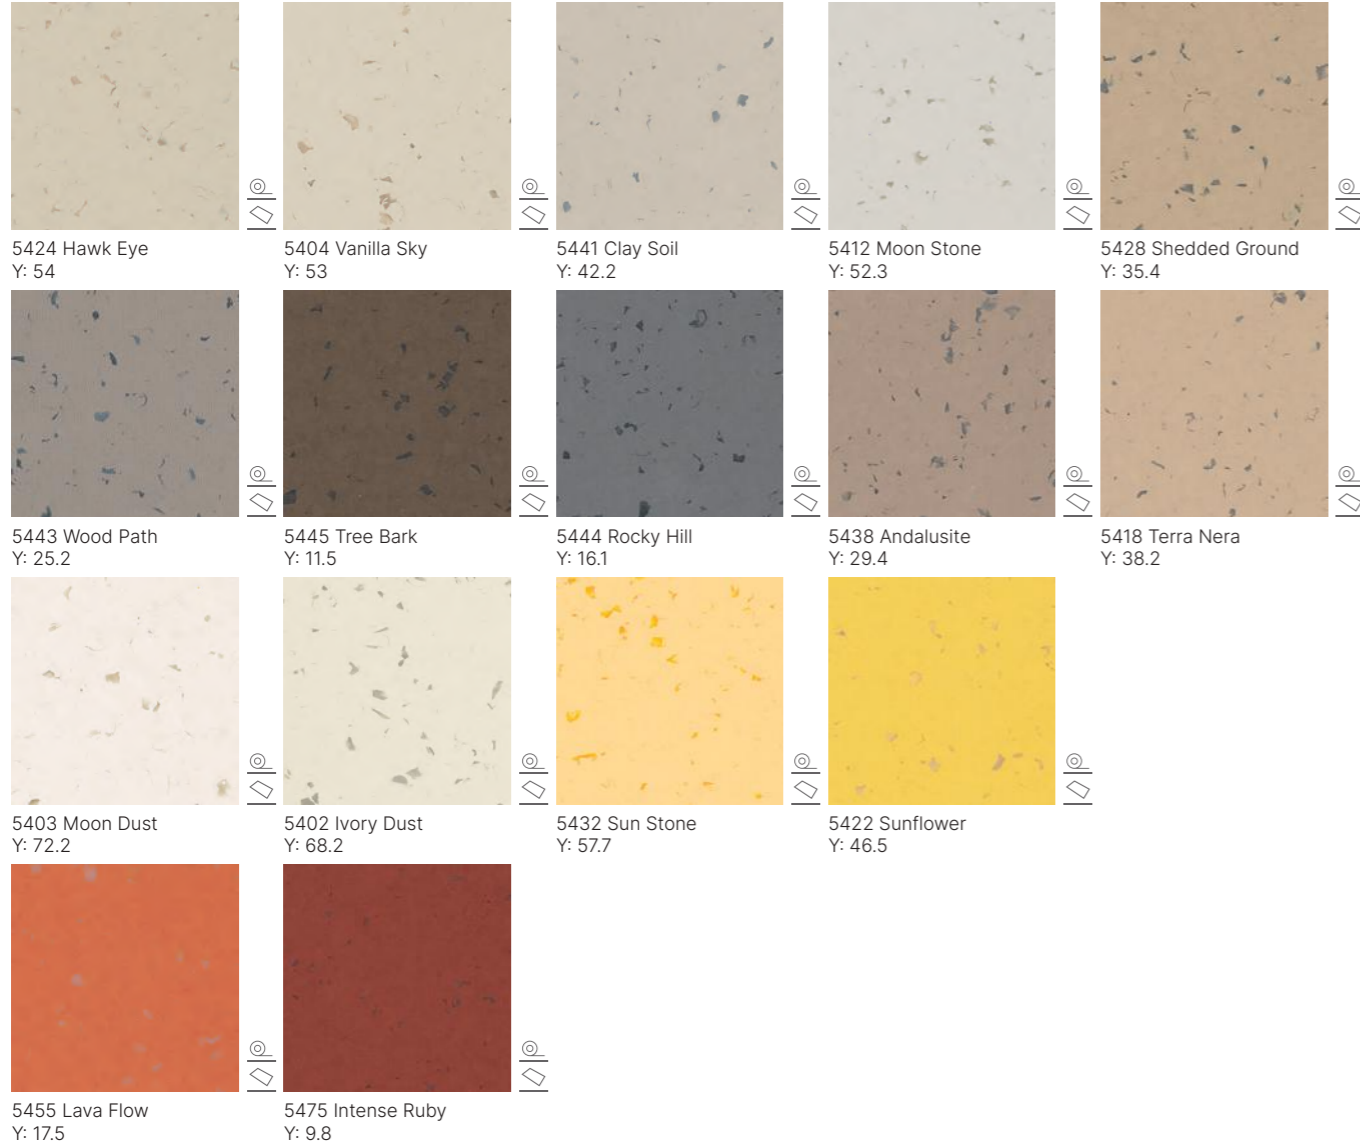

5418 Terra Nera / 5445 Tree Bark

Tiles 608 x 608mm  
 Min order quantity 500m<sup>2</sup>

Evercare™

100% Recyclable

Y = Light Reflectance Value (LRV)

Weld Rods see page 234

# Mipolam Accord

## Homogeneous Flooring

- > Suitable for heavy traffic areas
- > Available in tile and sheet format (A 500m<sup>2</sup> minimum order applies to tiles)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs




0330 Kruger / 0321 Salt




0321 Salt  
Y: 67.1




0312 Powell  
Y: 56.3



0319 Toba  
Y: 43



0310 Huron  
Y: 46.3




0330 Kruger  
Y: 26.8



0306 Inari  
Y: 53.6




0316 Malaren  
Y: 31.9



0346 Roxen  
Y: 16.1



0332 Dore  
Y: 56.8




0301 Louise  
Y: 64.4



0324 Sand  
Y: 52.1




0443 Krumme  
Y: 25.1



0437 Flamingo Resort  
Y: 30.7



0425 Cork  
Y: 32.4




0303 Manitoba  
Y: 68.8




0441 Loch Ness  
Y: 42



0445 Otto  
Y: 9.4




0448 Bandak  
Y: 10.1



0315 Orange River  
Y: 19.2



0305 Light Sand  
Y: 64




0457 Como  
Y: 23.2




0463 Bourget  
Y: 24.9




0447 Grunsee  
Y: 48.8



0417 Constance  
Y: 51.5



0320 Ontario  
Y: 33.1



0450 Thames  
Y: 19.9



0459 Mississippi  
Y: 10.8



0360 Balaton  
Y: 6.7



Tiles 608 x 608mm  
Min order quantity 500m<sup>2</sup>

Evercare™



100%  
Recyclable



Y = Light Reflectance  
Value (LRV)

Weld Rods  
see page 234

# Mipolam Affinity

## Homogeneous Flooring

- > Suitable for heavy traffic areas
- > Available in tile and sheet format (A 500m<sup>2</sup> minimum order applies to tiles)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

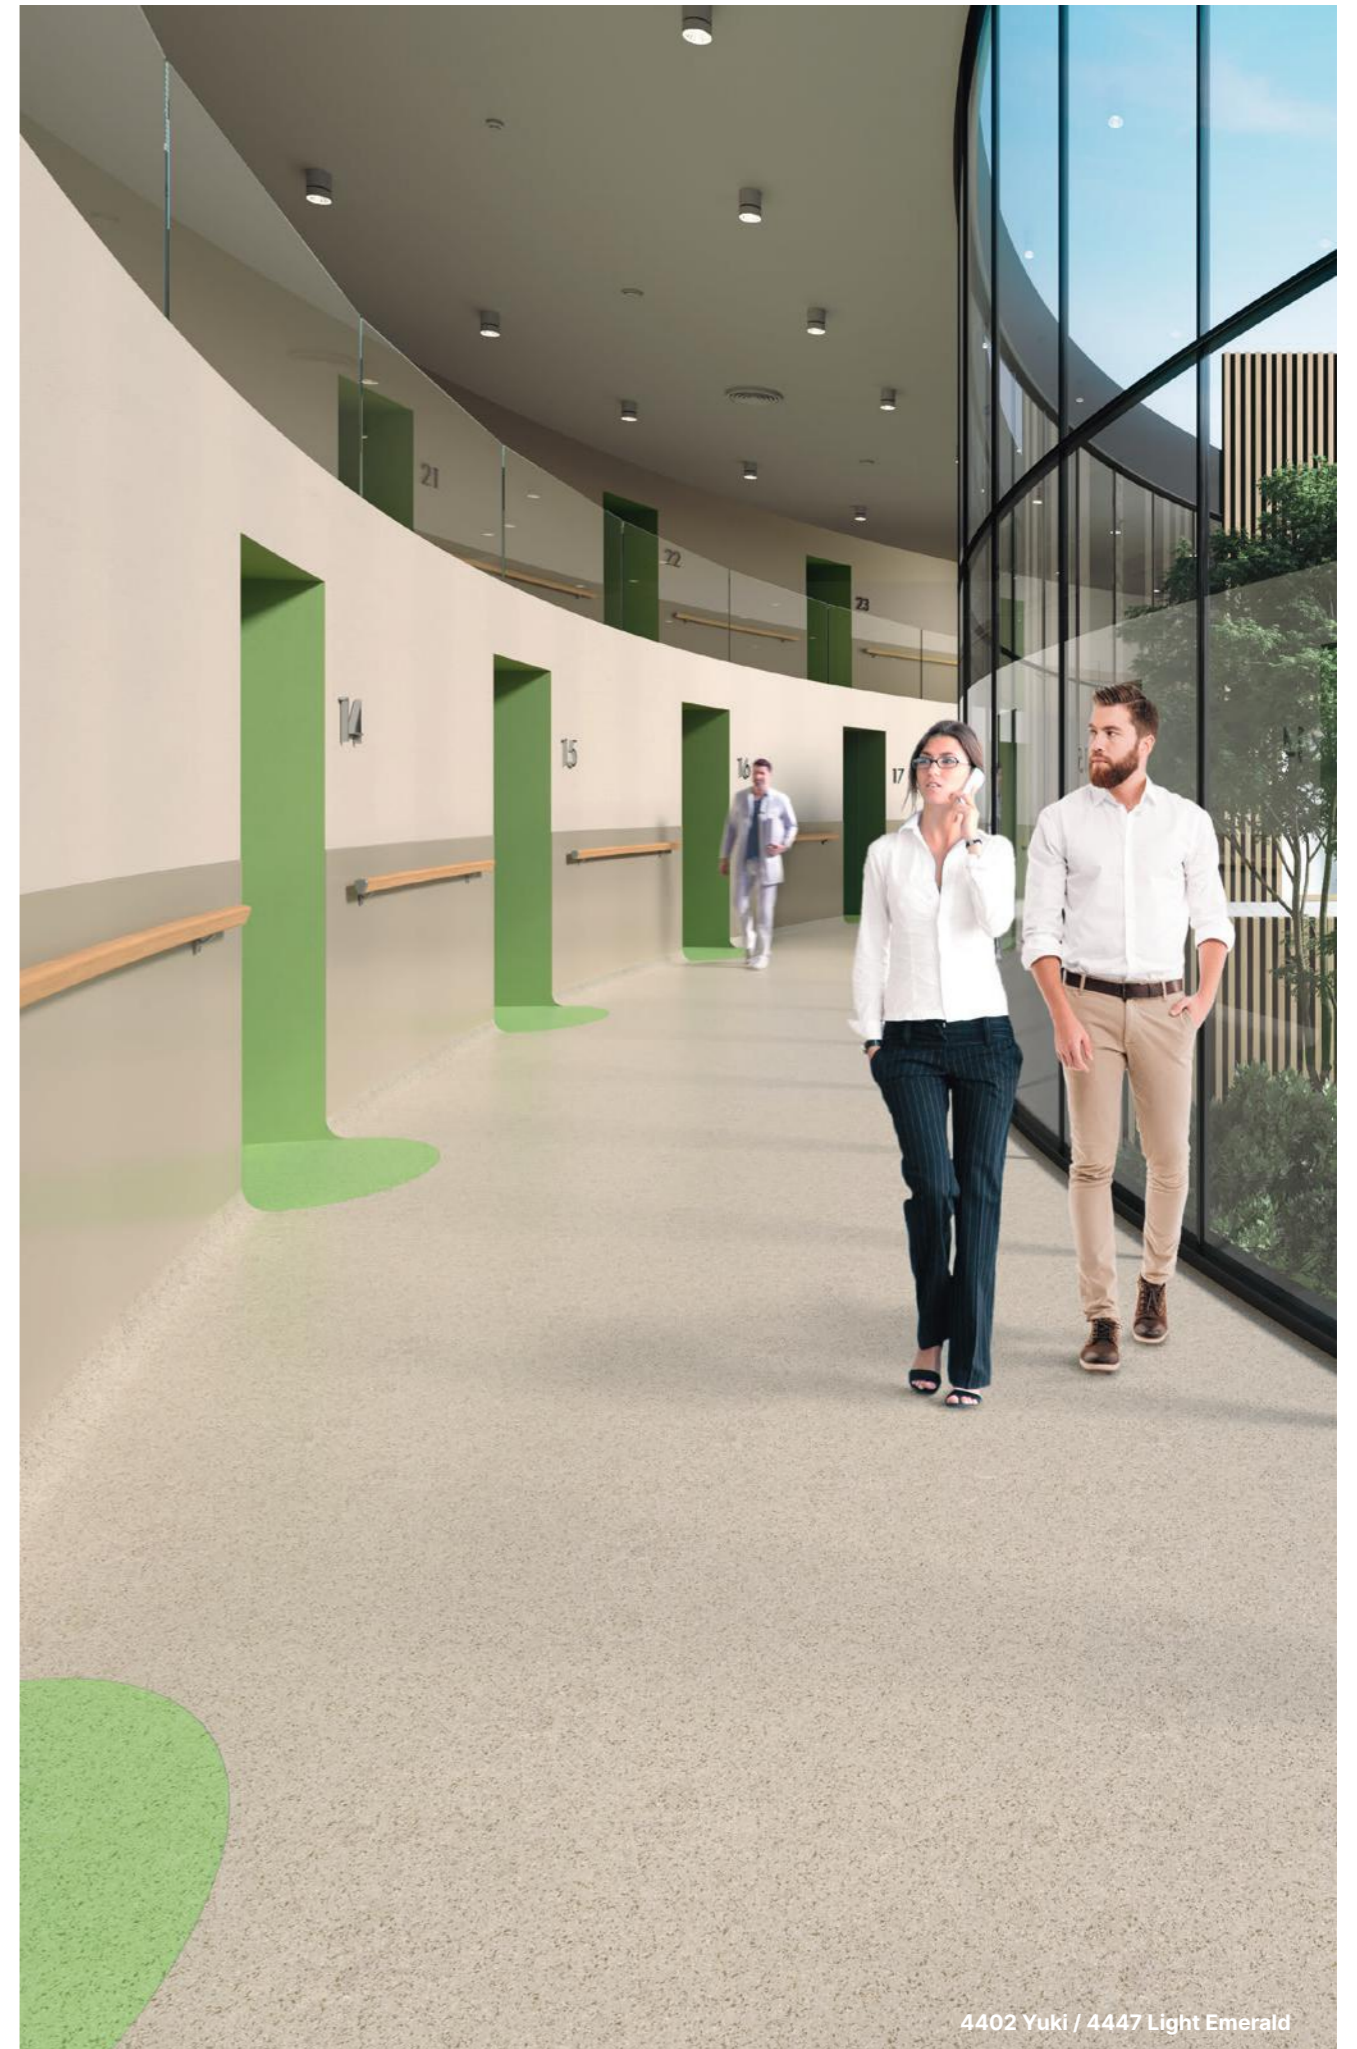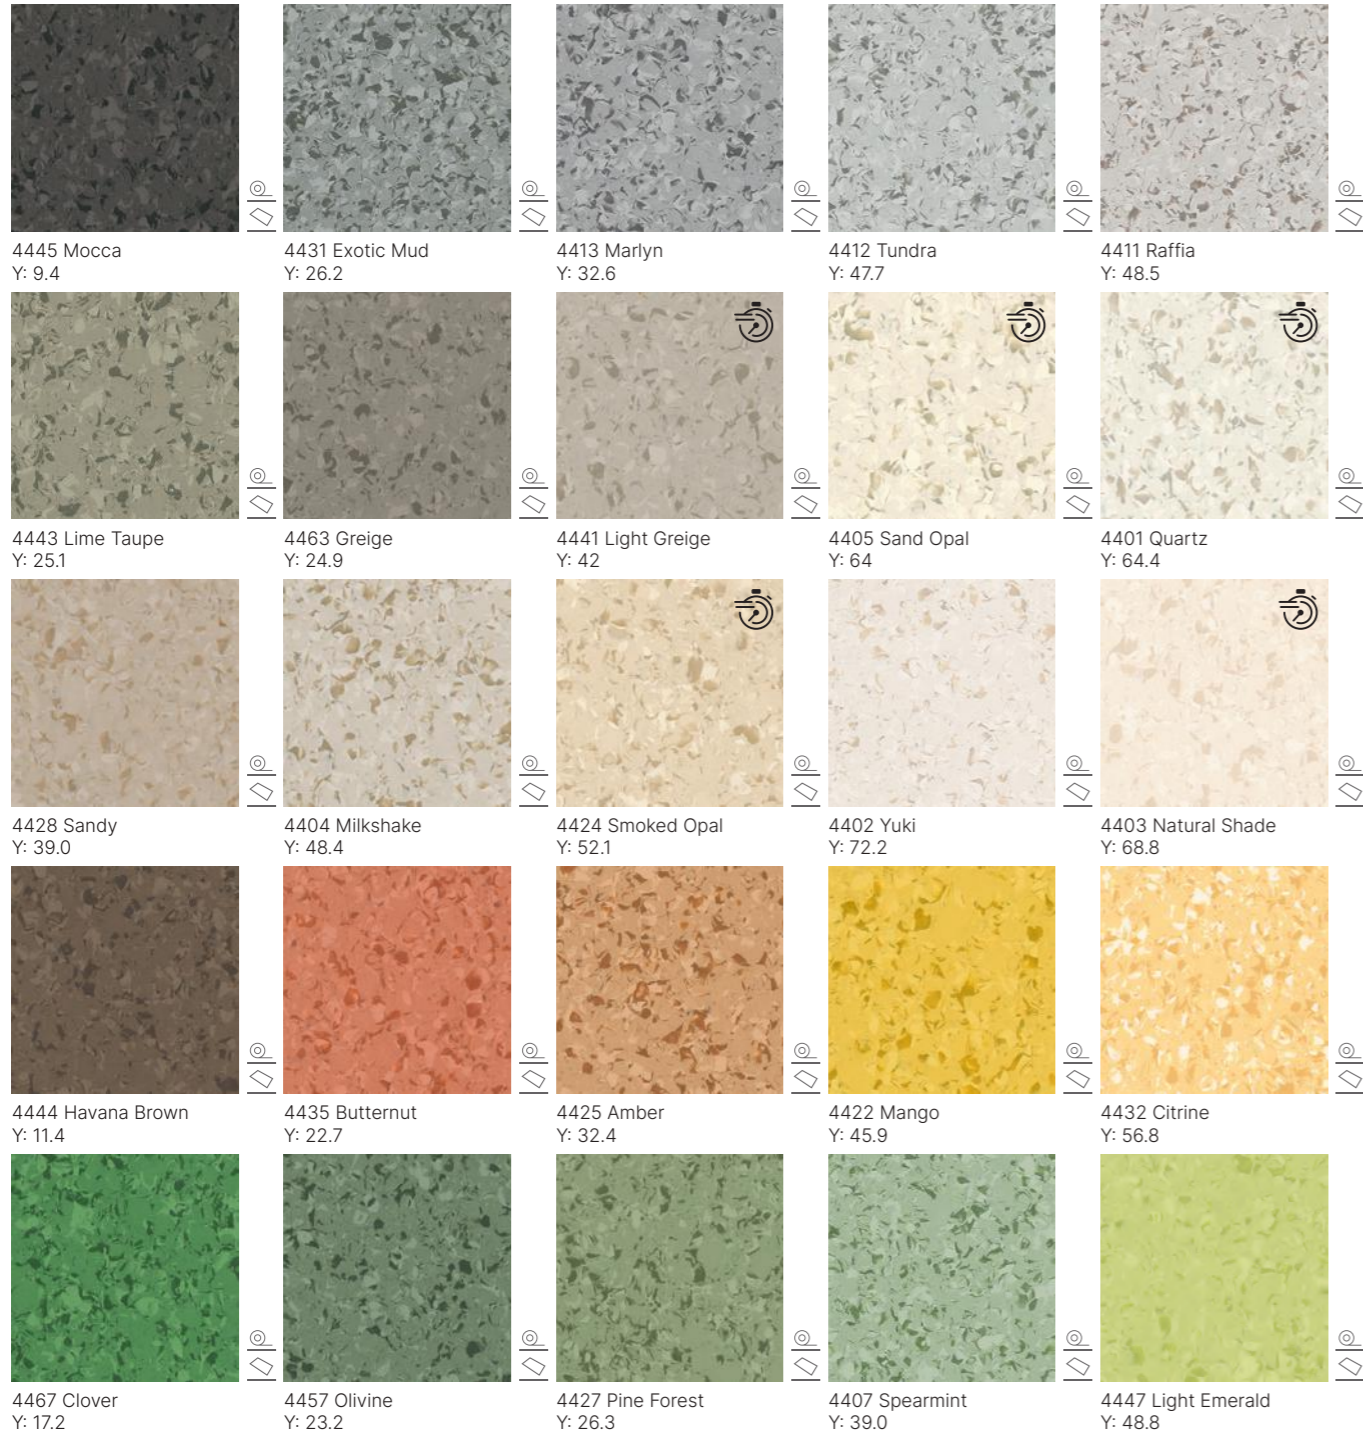

Tiles 608 x 608mm  
 Min order quantity 500m<sup>2</sup>

**Evercare™**

100% Recyclable

Y = Light Reflectance Value (LRV)

Stocked for quick delivery see page 4



Weld Rods see page 234

4402 Yuki / 4447 Light Emerald

# Mipolam Affinity

## Homogeneous Flooring

- > Suitable for heavy traffic areas
- > Available in tile and sheet format (A 500m<sup>2</sup> minimum order applies to tiles)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

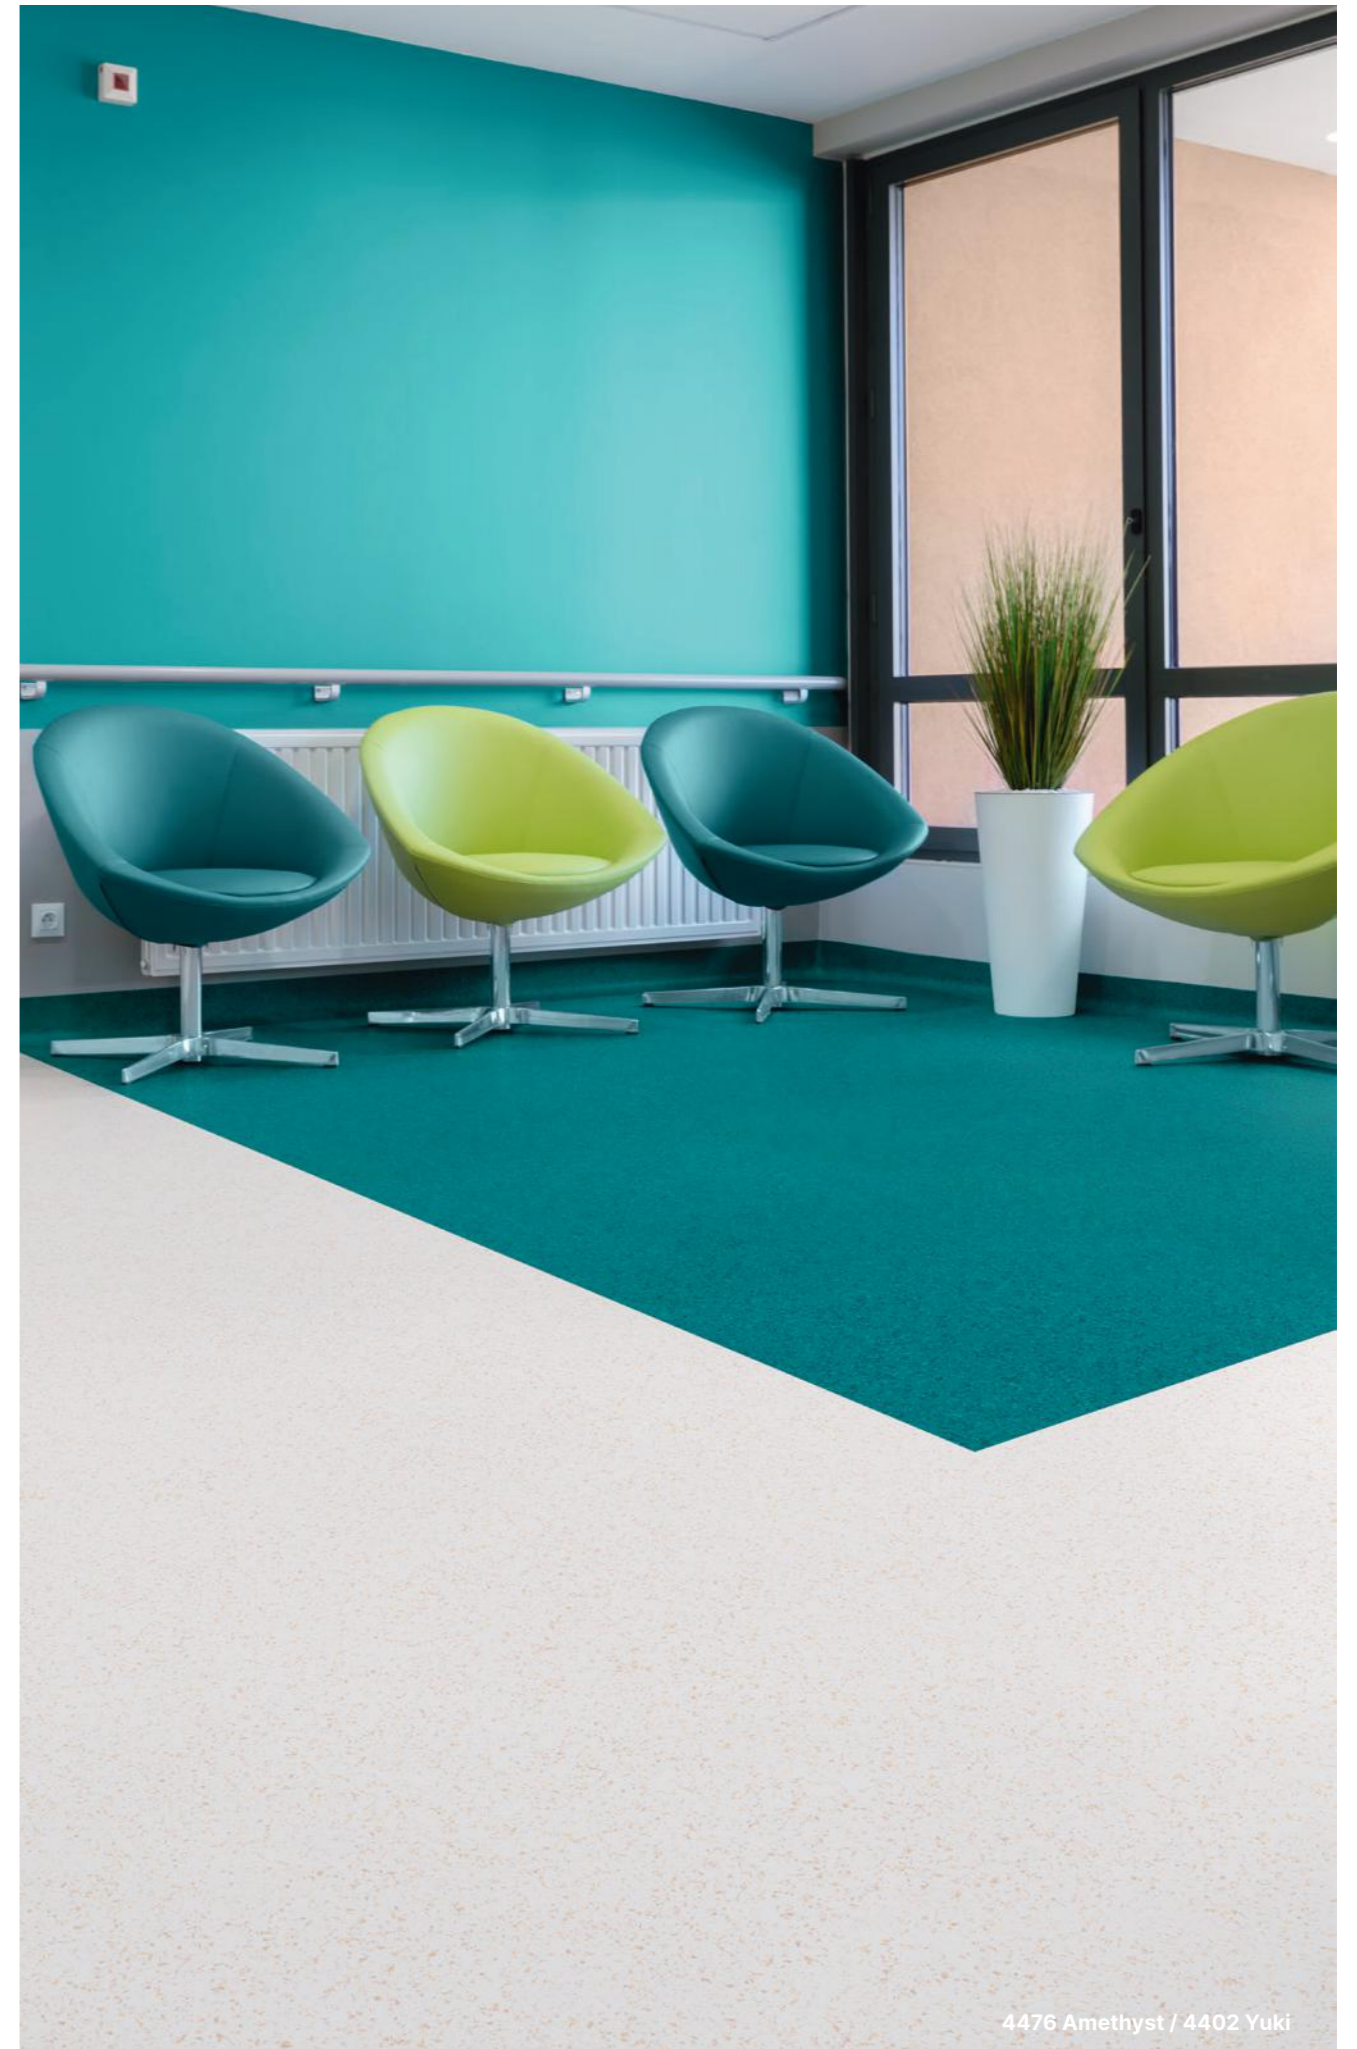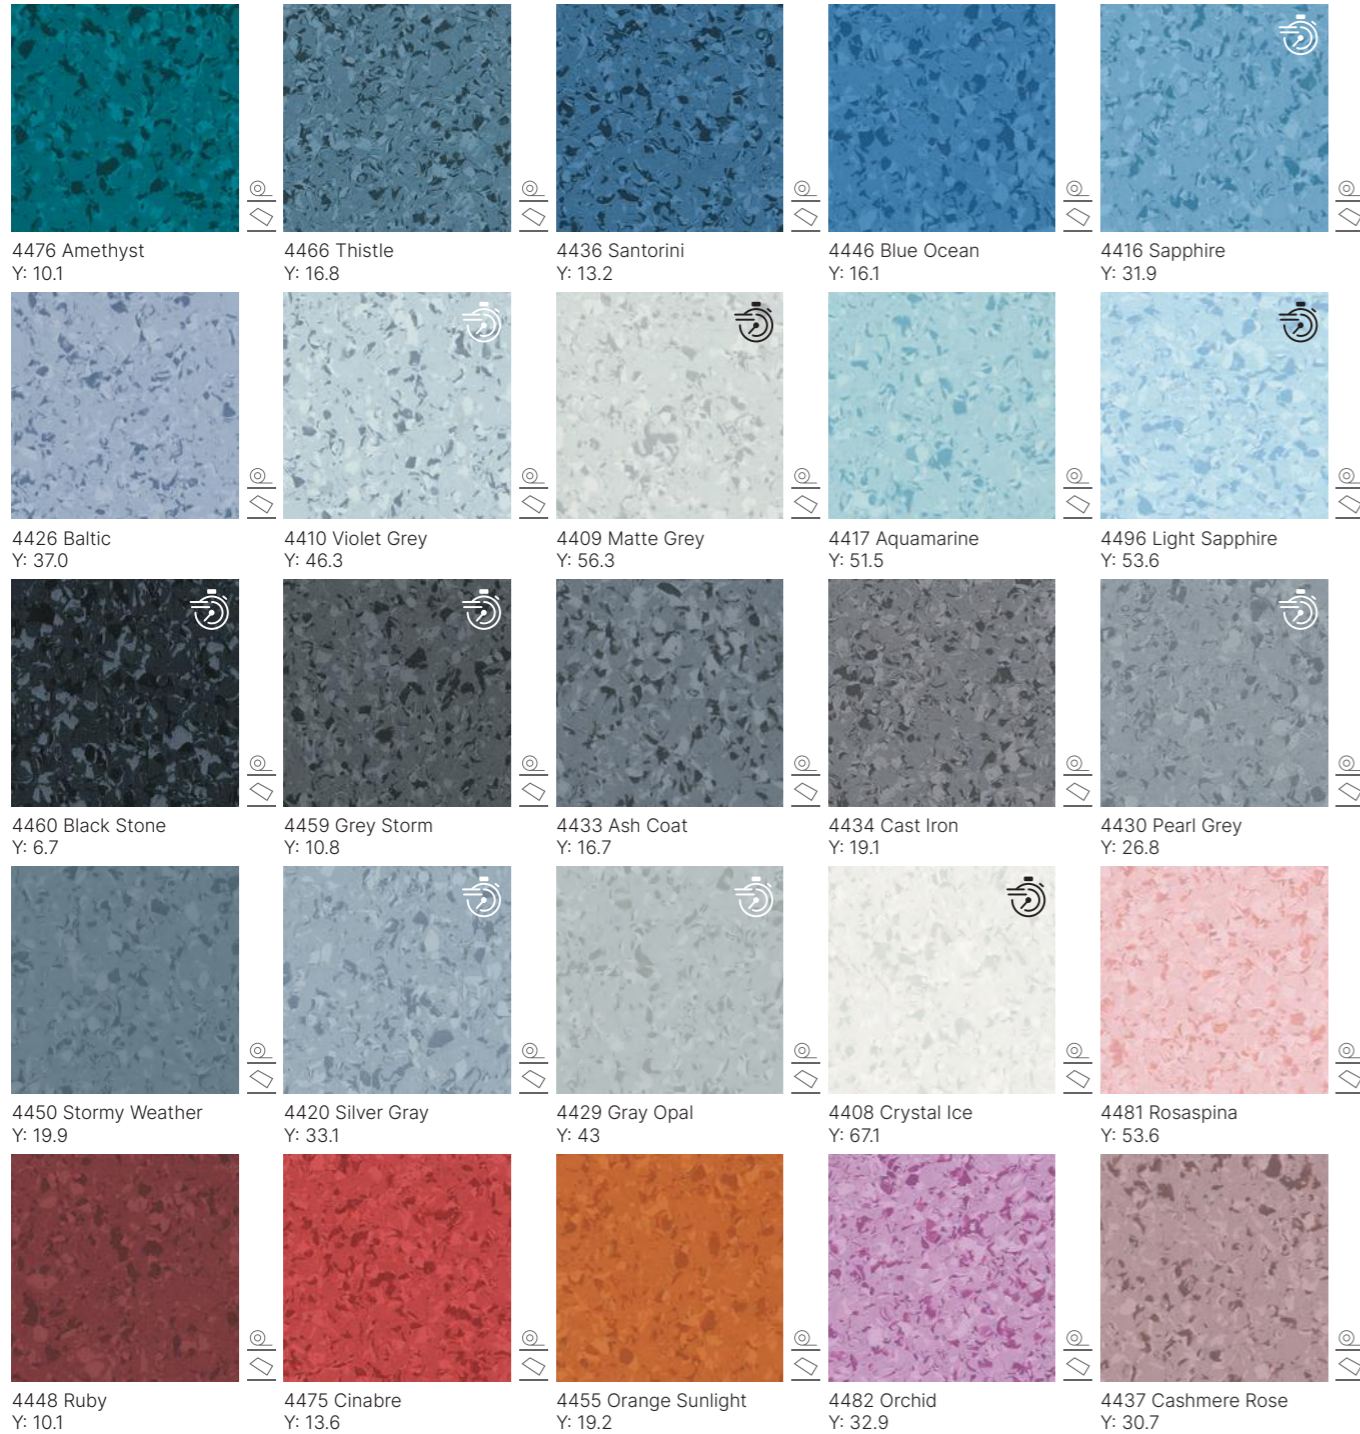

Tiles 608 x 608mm  
 Min order quantity 500m<sup>2</sup>

Evercare™

100% Recyclable

Y = Light Reflectance Value (LRV)

Stocked for quick delivery see page 4

Weld Rods see page 234

4476 Amethyst / 4402 Yuki

# Mipolam Cosmo

## Homogeneous Flooring


- > Suitable for normal to heavy traffic areas
- > Available in tile and sheet format. No minimum order quantity applies to tile colours marked with a tile icon. All other colours are available as a tile with a 500m<sup>2</sup> minimum order quantity
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs



# Mipolam Troplan

## Homogeneous Flooring


- > Suitable for normal to heavy traffic areas
- > Available in tile and sheet format (a 500m<sup>2</sup> minimum order applies to tiles)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

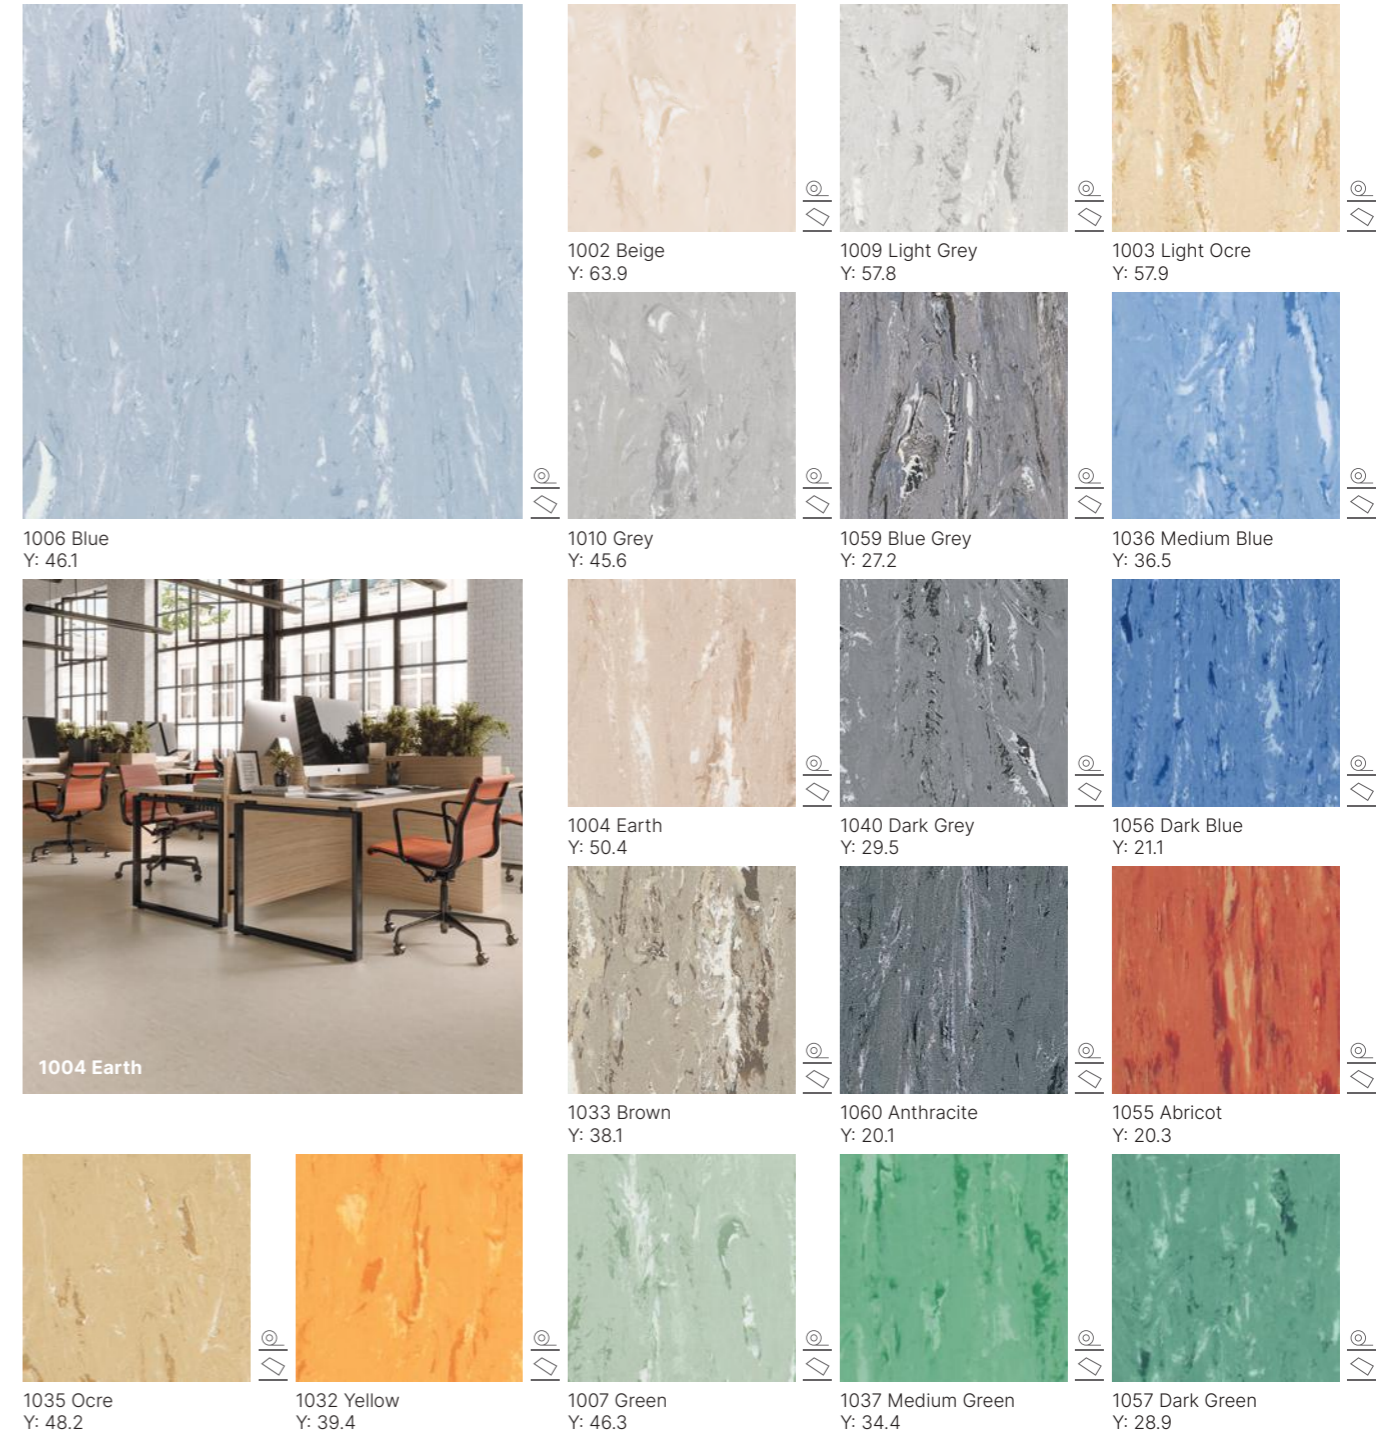

# Mipolam Classic

## Homogeneous Flooring

- > Suitable for normal to heavy traffic areas
- > Available in tile and sheet format (a 500m<sup>2</sup> minimum order applies to tiles)
- > PUR surface treatment providing easier maintenance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

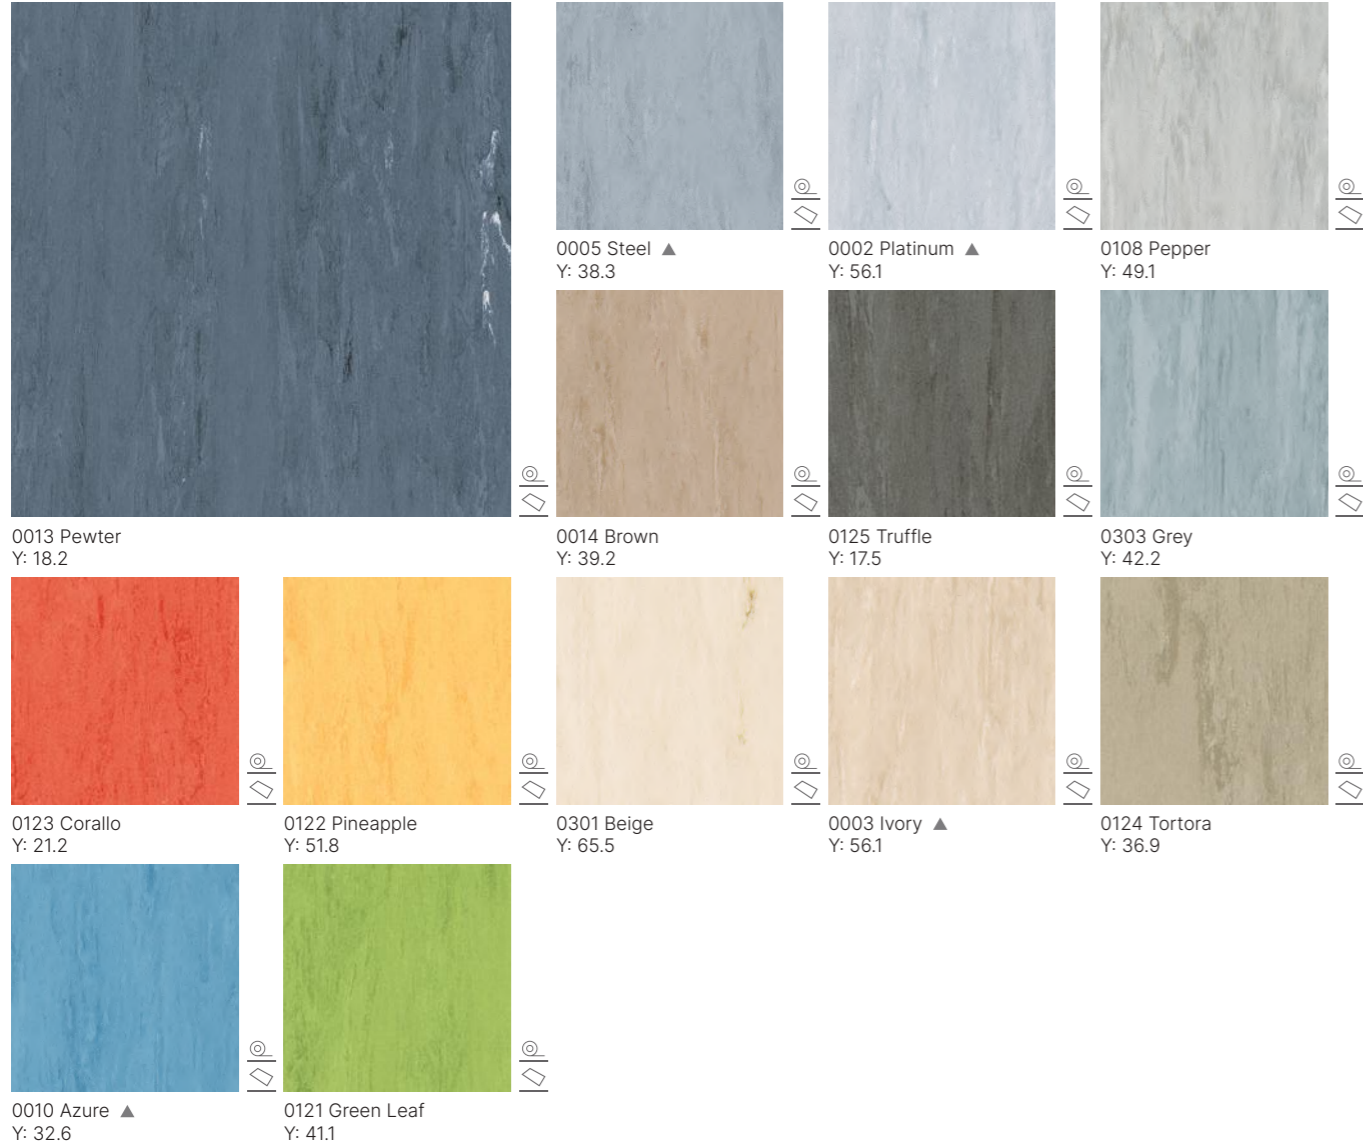

Tiles 300 x 300mm  
 2.0mm only  
 Min order quantity 500m<sup>2</sup>


PUR

100% Recyclable

Y = Light Reflectance Value (LRV)

Weld Rods see page 234

▲ Colour also available in 1.5mm thickness (2m x 20m sheet format only)  
 Rolls 2.0mm - 2m x 20m

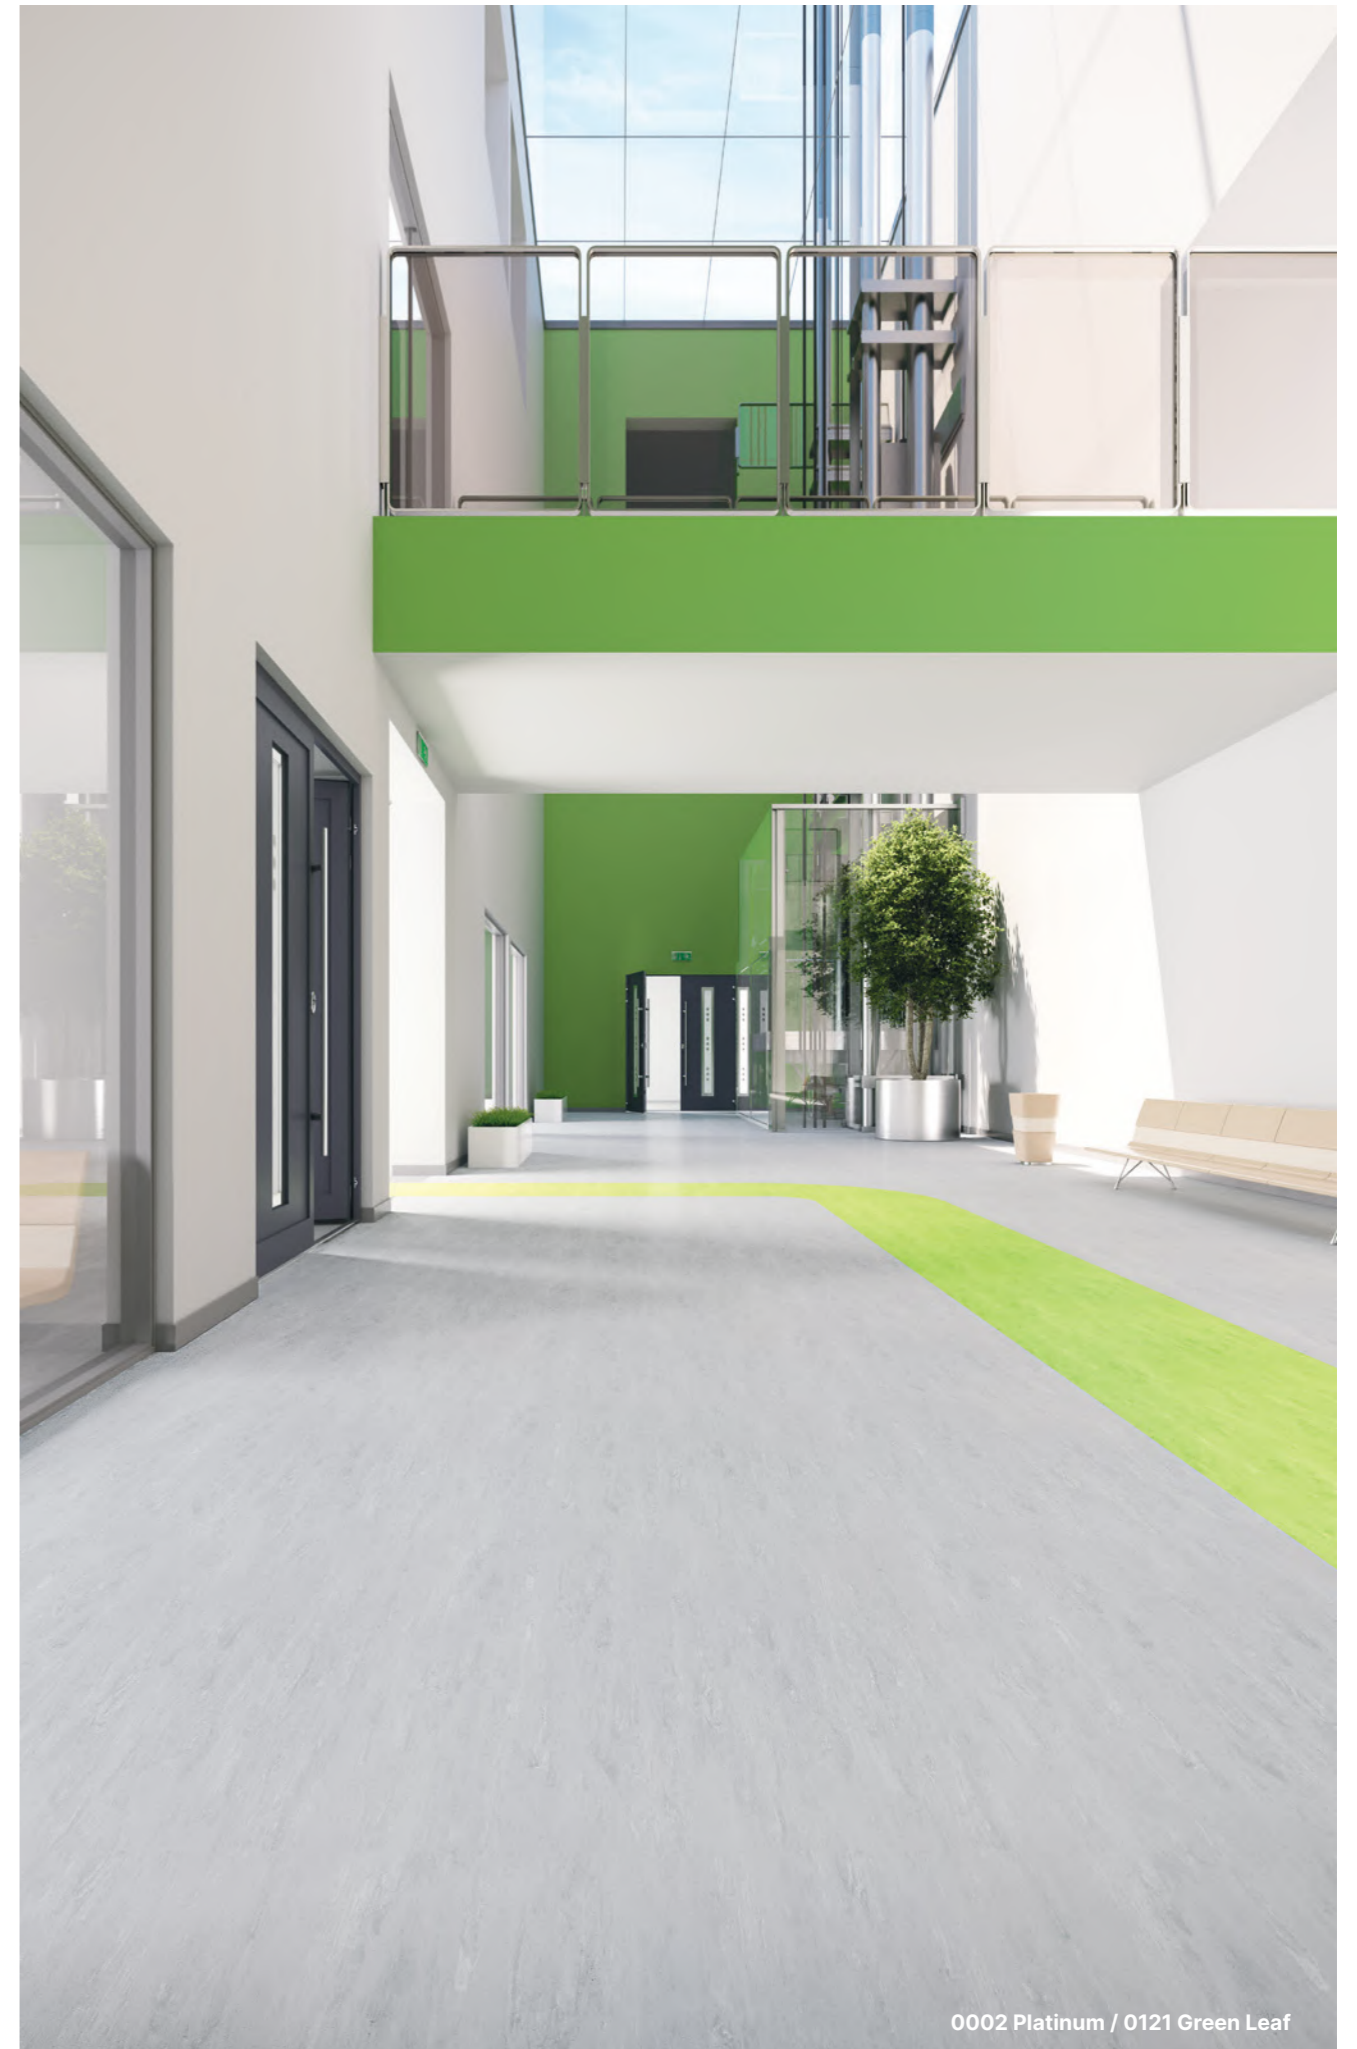

0002 Platinum / 0121 Green Leaf

# ESD Solutions for Dissipative & Conductive Floors

UPDATED

The well-established **Mipolam** range already has an outstanding reputation for its performance in health and education buildings. Mipolam Technical Flooring solutions takes this reputation and offers a complete range of Dissipative, Conductive and ESD floors for heavy-duty, Hi-tech applications: electronics areas, computer rooms, operating theatres, radiology, and cleanrooms.

**Mipolam EL5** is a conductive flexible vinyl floorcovering which ensures optimal and consistent conductive properties throughout its full life expectancy.

**Mipolam EL7** and **Mipolam Robust EL7** are dissipative flexible vinyl floorcoverings with revolutionary Evercare™ surface treatment for high resistance to chemicals.

**Mipolam Technic EL5** is a conductive flexible homogeneous vinyl floor covering available in a tile format.

**Mipolam BioControl EL5** is a top-of-the-range ESD floor for cleanrooms. It has a conductive backing to ensure optimal and consistent conductive properties throughout its full life expectancy.



A complete range for Hi-tech applications: electronics and telecommunication areas, computer rooms, operating theatres, radiology

Mipolam BioControl EL5 - 2001 Light Fog



		Mipolam						
		EL7	Robust EL7	EL5	Technic EL5	BioControl EL5	BioControl ESD+	
<b>Description</b>								
Thickness	EN ISO 24346	mm	2.0	2.0	2.0	2.0	2.0	2.0
Weight	EN ISO 23997	g/m <sup>2</sup>	3100	3300	2985	3800	2985	2980
Width of sheet	EN ISO 24341	cm	200	200	200	-	200	200
Length of sheet	EN ISO 24341	lm	20	20	20	-	20	20
Tile size	EN ISO 24342	mm	608 × 608	608 × 608	-	608 × 608	-	-
Number of tiles per package	-	-	20	20	-	20	-	-
<b>Classification</b>								
Norm / Product specification	-	-	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581
European classification	EN ISO 10874	class	34-43	34-43	34-43	34-43	34-43	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Electrical resistance <sup>(1)</sup>	EN 1081	Ohm	10 <sup>6</sup> ≤ Rt ≤ 10 <sup>8</sup>	10 <sup>6</sup> ≤ Rt ≤ 10 <sup>8</sup>	10 <sup>4</sup> ≤ Rt ≤ 10 <sup>6</sup>	10 <sup>4</sup> ≤ Rt ≤ 10 <sup>6</sup>	Rt ≤ 10 <sup>6</sup>	Rt ≤ 10 <sup>6</sup>
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2	< 2	< 2
Slip resistance wet	DIN 51130	class	R9	R9	R9	R9	R9	R9
<b>Performances</b>								
Type Binder content	EN ISO 10581	type	II	II	I	II	I	I
Dimensional stability (requirement)	EN ISO 23999	%	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	≤ 0.40	≤ 0.25	≤ 0.40	≤ 0.40
Residual indentation (norm)	EN ISO 24343-1	-	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10
Residual indentation (average measured value)	EN ISO 24343-1	mm	≈ 0.02	≈ 0.03	≈ 0.02	≈ 0.03	≈ 0.02	≈ 0.03
Castor chair test (type W)	ISO 4918	-	OK	OK	OK	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	-	Evercare™	-	Evercare™	Evercare™
Chemical products resistance <sup>(2)</sup>	EN ISO 26987	-	OK	OK	OK	OK	OK	OK
Anti-bacterial activity (E.coli – S. aureus – MRSA) after 24h <sup>(3)</sup>	ISO 22196	-	> 99% inhibits growth	-	> 99% inhibits growth	-	> 99% inhibits growth	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h <sup>(3)</sup>	ISO 21702	-	> 99.7% virucidal activity	-	> 99.7% virucidal activity	-	> 99.7% virucidal activity	> 99.7% virucidal activity
<b>Environment / indoor air quality</b>								
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 10	< 10	< 10	< 10	< 10	< 10
Certification	-	-	Floorscore®	-	Floorscore®	-	Floorscore®	Floorscore®
<b>CE Marking</b>								
CE	EN 14041							

(1) Measured before installation.

(2) Staining table available upon request.

(3) The implementation of an effective cleaning method is the best defence against infection. Important: please refer to Gerflor installation guidelines - [www.gerflor.com](http://www.gerflor.com)


# Mipolam EL7 / Robust EL7

## Dissipative Linoleum for ESD Areas


UPDATED

- > Suitable for heavy traffic areas
- > Permanent dissipative flooring available in tile and sheet format
- > Revolutionary Evercare™ (Mipolam EL7) surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product – reducing maintenance costs

### Mipolam EL7

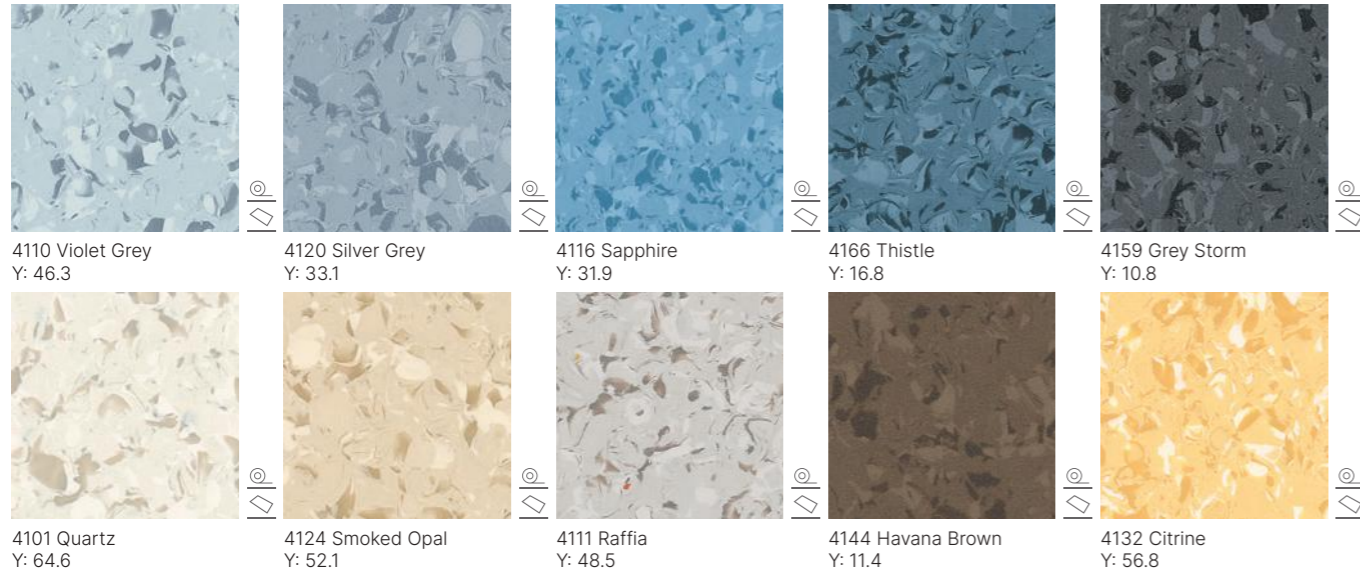

### Mipolam Robust EL7

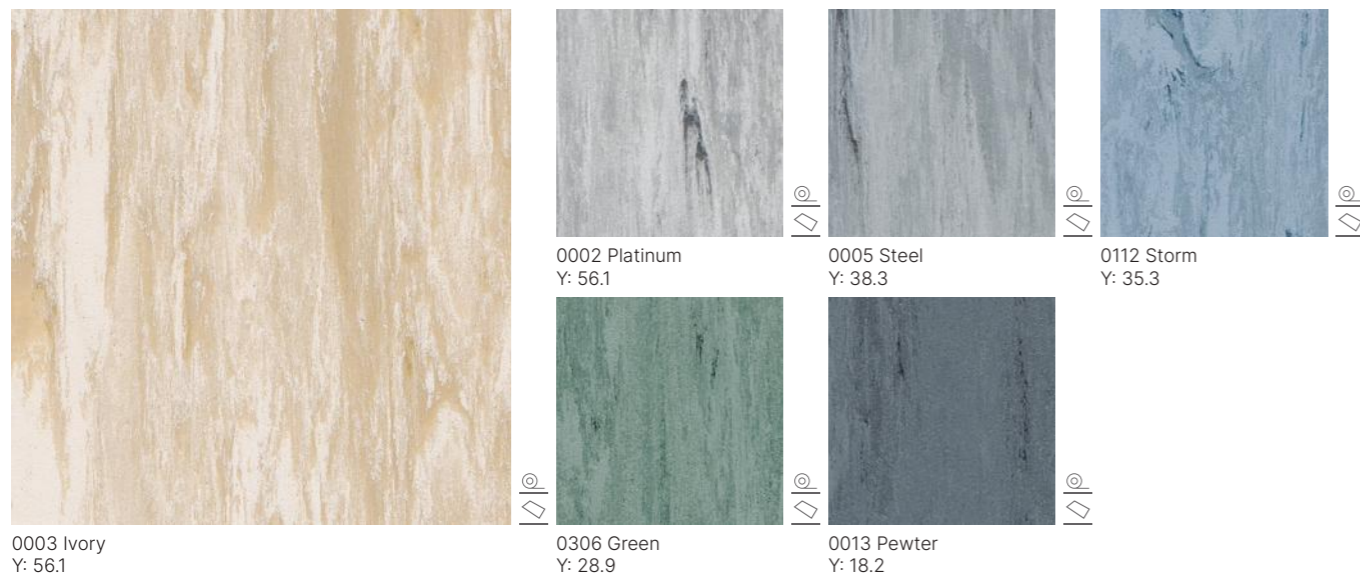

R9 Slip Resistant | EL7  $10^6 \leq Rt \leq 10^8 \Omega$  | Robust EL7  $10^6 \leq Rt \leq 10^8 \Omega$

 Compact | 
  Evercare™ | 
  100% Recyclable | 
 Y = Light Reflectance Value (LRV) | 
 Weld Rods see page 234



Mipolam Robust EL7 - 4116 Sapphire / 4110 Violet Grey




# Mipolam EL5 / Technic EL5

Conductive Linoleum for ESD Areas


UPDATED

- > Suitable for heavy traffic areas
- > Permanent conductive flooring
- > EL5 available in sheet format, Technic EL5 available in tile format
- > Revolutionary Evercare™ (Mipolam EL5) surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product – reducing maintenance costs


## Mipolam EL5

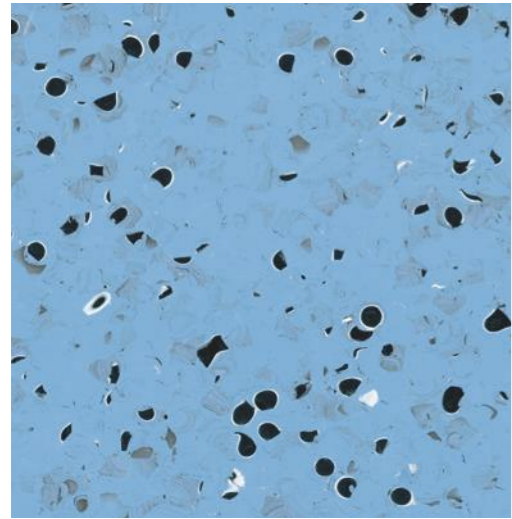


0354 Blue  
Y: 33.4




0350 Light Grey  
Y: 58.2




0353 Beige  
Y: 48.4



0355 Green  
Y: 36.7




0352 Grey  
Y: 35.5



0351 Black  
Y: 7


## Mipolam Technic EL5

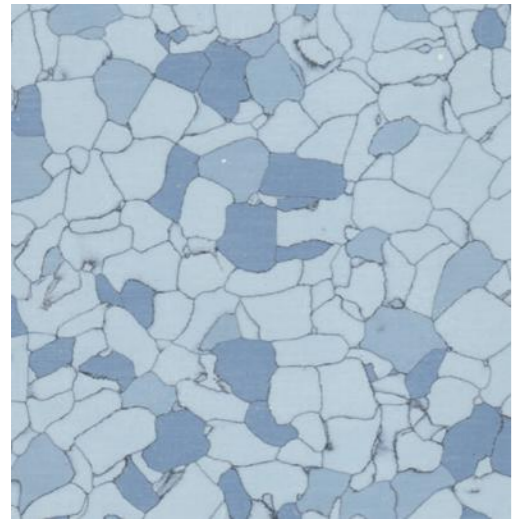


0637 Light Blue  
Y: 41.8



0635 White  
Y: 67




0640 Beige  
Y: 47.6



0639 Green  
Y: 47.1



0636 Grey  
Y: 56.9



0638 Blue  
Y: 37.3

R9 Slip Resistant

EL5 Connect  
 $10^4 \leq Rt \leq 10^9 \Omega$

Technic EL5  
 $10^4 \leq Rt \leq 10^8 \Omega$



Evercare™



100% Recyclable

Y = Light Reflectance Value (LRV)

Weld Rods see page 234



Mipolam EL5 - 0354 Blue / 0350 Light Grey


# Mipolam BioControl EL5 / Mipolam BioControl ESD+

Conductive Linoleum for EPA & Cleanroom Areas


UPDATED

- > Suitable for heavy traffic areas
- > Complies with production standards for ESD sensitive materials.
- > Resistance to common damage in cleanrooms.
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product – reducing maintenance costs


## Mipolam BioControl EL5

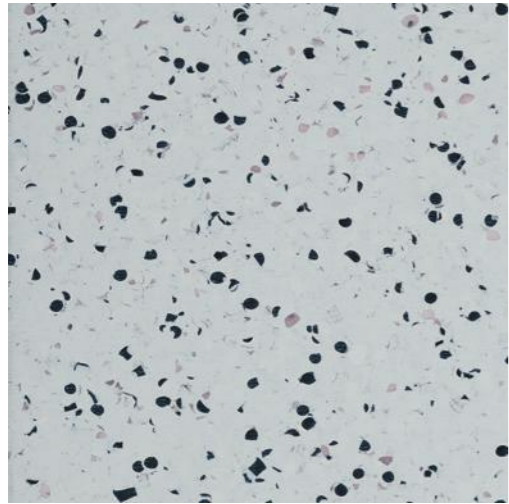


2001 Light Fog  
Y: 55.2



2002 Volcano  
Y: 7




2004 Horizon  
Y: 33.4



2006 Medium Fog  
Y: 40.6

## Mipolam BioControl ESD+

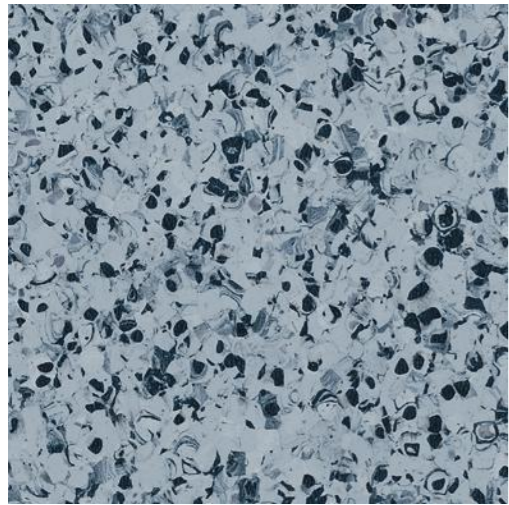

1000 Graphite Grey  
Y: 29.7



Mipolam BioControl ESD+ - 1000 Graphite Grey

R9 Slip Resistant | BioControl EL5 Rt ≤ 10<sup>6</sup> Ω | BioControl ESD+ Rt ≤ 10<sup>6</sup> Ω

Evercare™ | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 234

# Premium Multilayered Flooring

The **Premium** range is available in Comfort and Compact versions. Recently updated, the range offers 80 colour references across 6 designs for greater creative choice.


The ranges are suitable for high traffic areas so are extremely durable. They have a long lasting appearance through the incorporation of densely pressed colour chips in the wear layer.

Treated with Evercare™ surface treatment with extreme stain resistance and a matt finish, no polish is required for the entire lifetime of the product thus reducing maintenance costs.

**Premium Comfort** has excellent acoustic and shock absorption properties with high acoustic performance (16dB Metallica range, 17dB all other ranges) and safe underfoot cushioning thanks to its very high density foam backing.

**Premium Compact** provides excellent resistance to static and dynamic loads. With quick indentation recovery (0.02mm) and superb dimensional stability – minimal rucking when heavy objects are wheeled across the surface.

Ideal solutions for schools, hospitals, retail outlets, offices, public areas as well as many other applications in various markets.

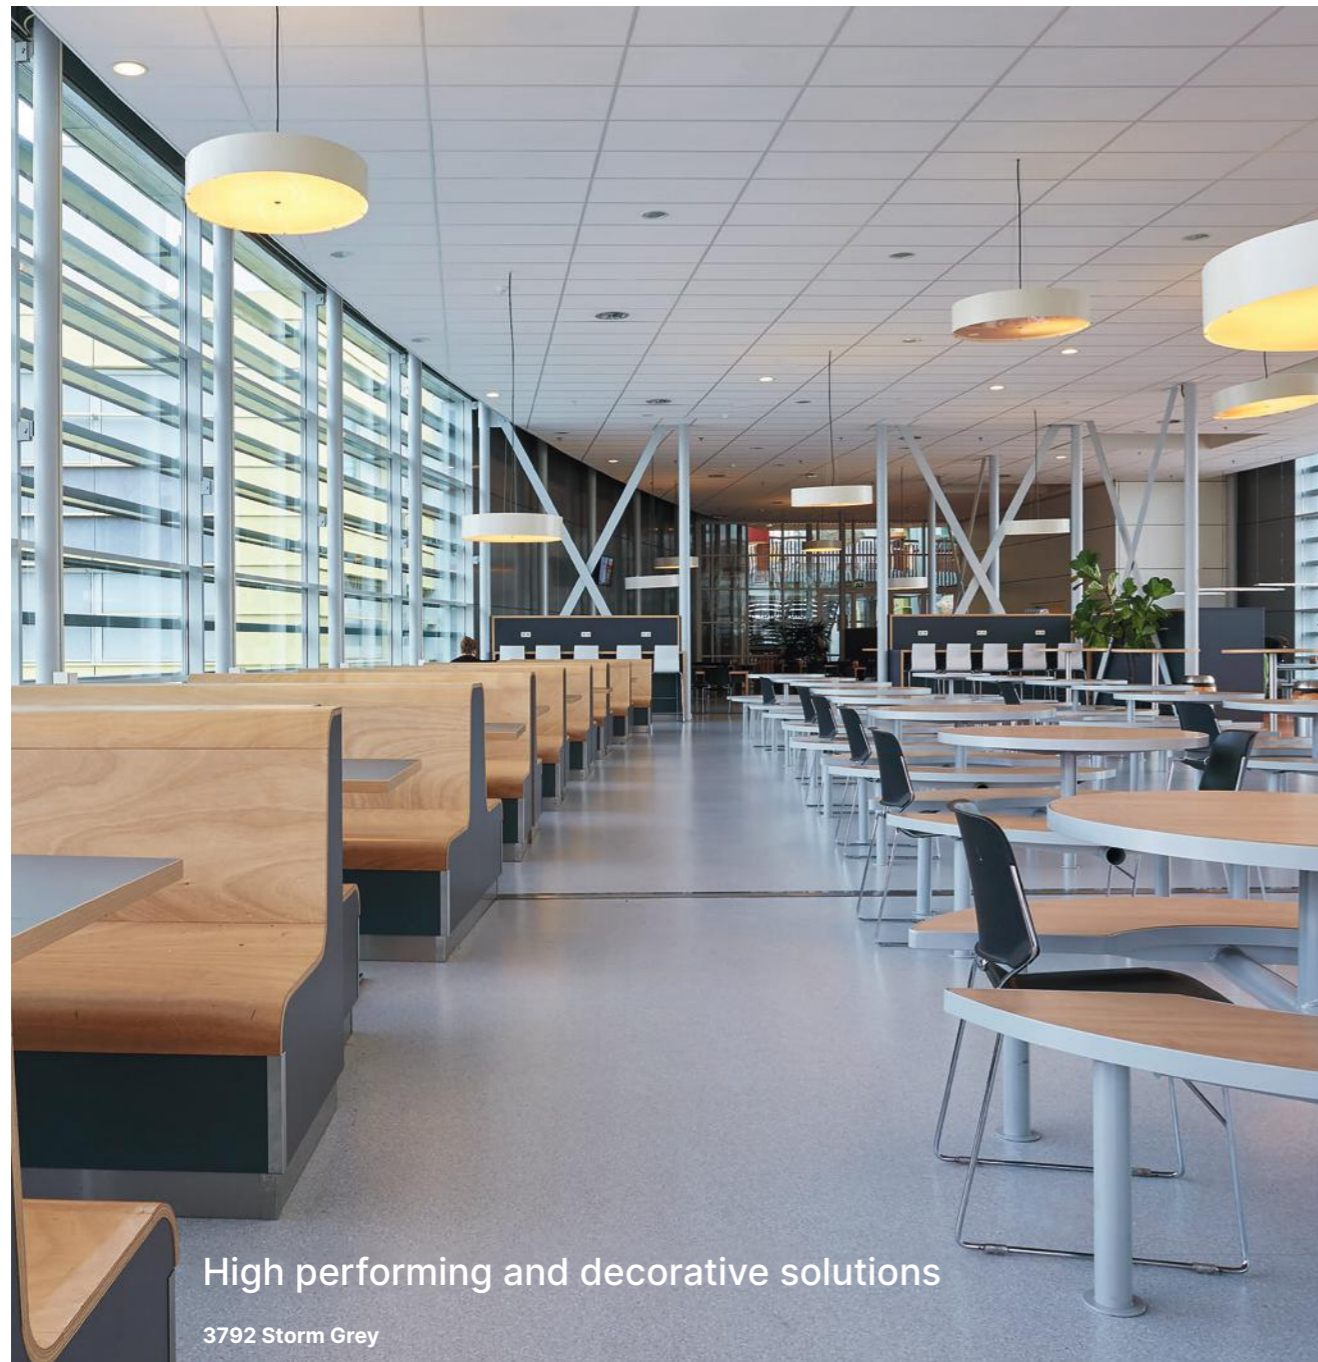

High performing and decorative solutions

3792 Storm Grey



## Taralay Premium

Compact      Comfort

Description			Compact	Comfort
Thickness	EN ISO 24346	mm	2.00	3.00 - 3.30
Wear layer thickness	EN ISO 24340	mm	> 1	> 1
Weight	EN ISO 23997	g/m <sup>2</sup>	2580-2680	2800-3260
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	lm	20	25
<b>Classification</b>				
Norm / Product specification	-	-	EN ISO 10582	EN 651
European classification	EN ISO 10874	class	34 -43	34 -42
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet	DIN 51130	class	R10	R10
<b>Performances</b>				
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T
Type binder content	EN ISO 10582	type	I	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20
Residual indentation (value)	-	mm	≈ 0.02	≈ 0.06
Impact sound insulation	EN ISO 717-2	dB	8	16 (Metallica range) 17 (All other ranges)
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6
Chemical products resistance	EN ISO 26987	-	OK	OK
Anti-bacterial activity (E.coli- S.aureus- MRSA) <sup>(1)</sup>	ISO 22196	-	99% inhibits growth	99% inhibits growth
Surface treatment	-	-	Evercare™	Evercare™
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 10	< 10
<b>CE Marking</b>				
CE	EN 14041			

(1) The implementation of an effective cleaning method is the best defence against infection.


# Premium

## Multilayered Flooring

- > Tough and durable, suitable for normal to high traffic areas
- > Most colour references available as both compact and comfort versions
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs



### Osmoz

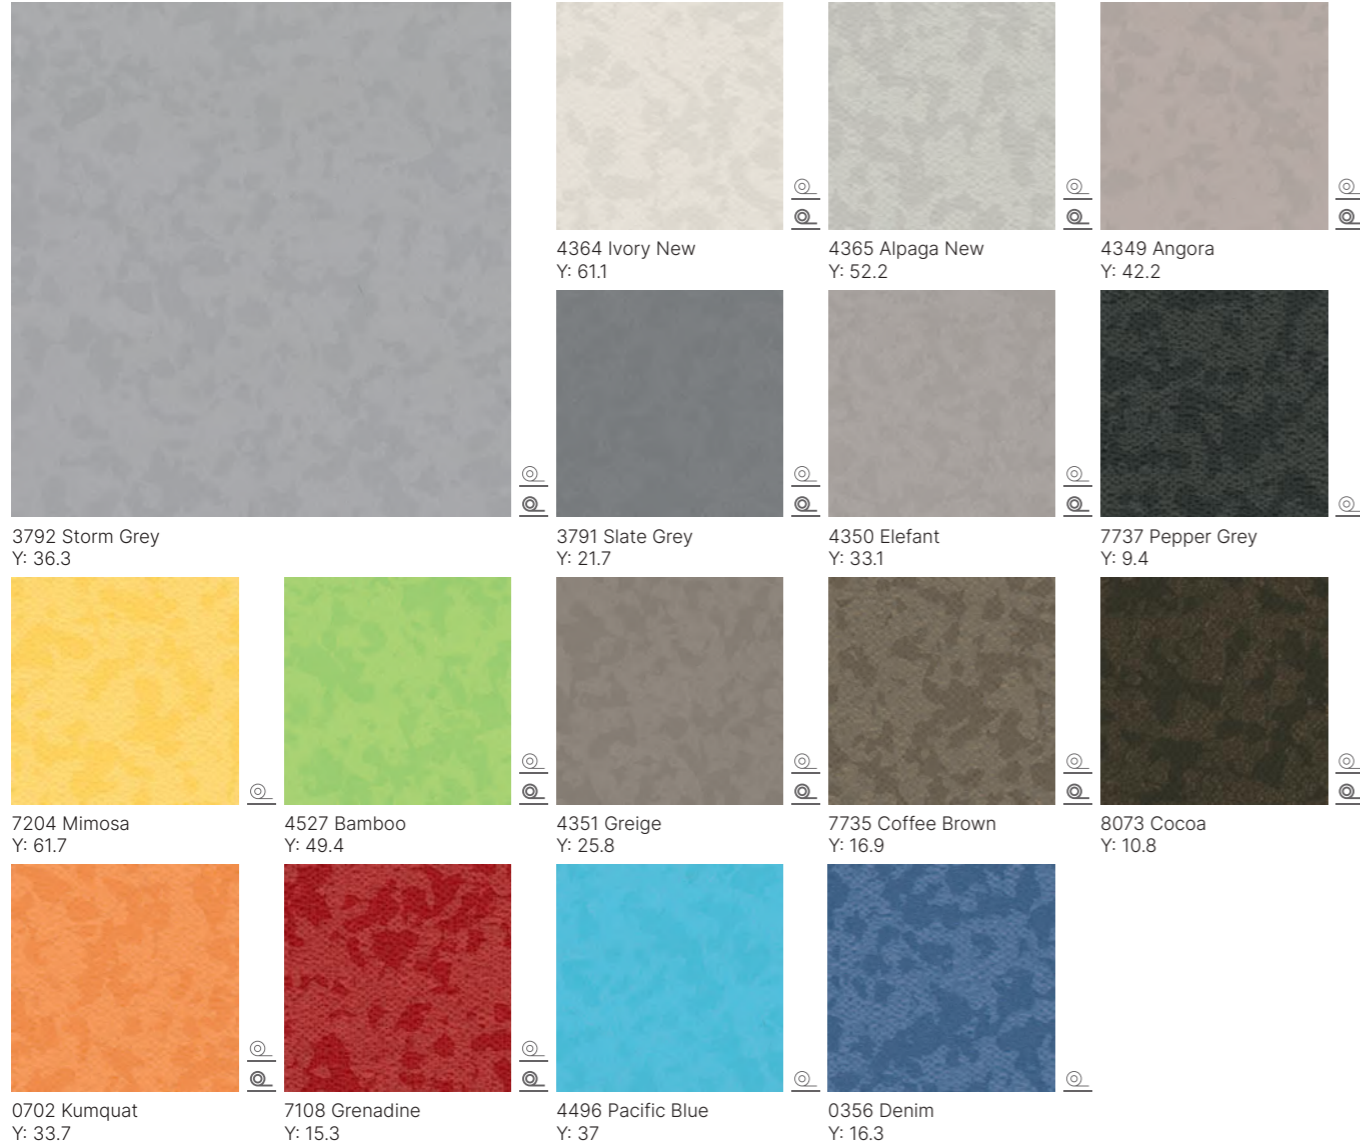

3792 Storm Grey / 4351 Greige


T Wear Group	R10 Slip Resistant	16 <sub>dB</sub> Quiet Underfoot Comfort - Metallic Range	17 <sub>dB</sub> Quiet Underfoot Comfort - All Other Ranges	VHD
Compact	Comfort	Evercare™	100% Recyclable	Y = Light Reflectance Value (LRV) Weld Rods see page 234

# Premium Multilayered Flooring


- > Tough and durable, suitable for normal to high traffic areas
- > Most colour references available as both compact and comfort versions
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs



## Poesy

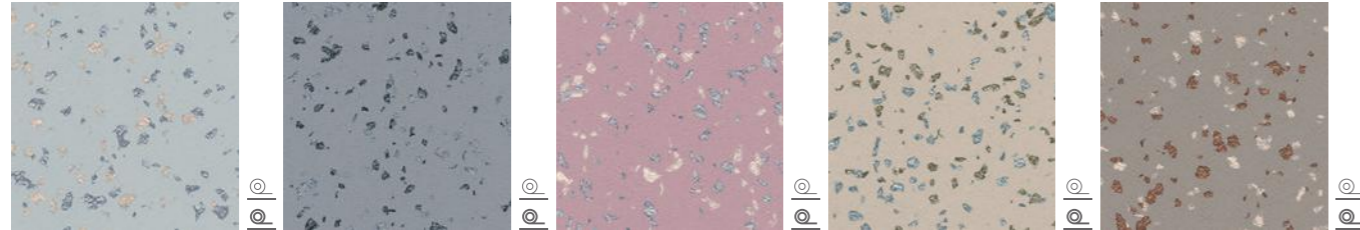

2750 Ellipse Y: 45.1    2751 Slam Y: 30.7    7109 Idylle Y: 34.2    2747 Ballade Y: 43.8    2748 Refrain Y: 28.8

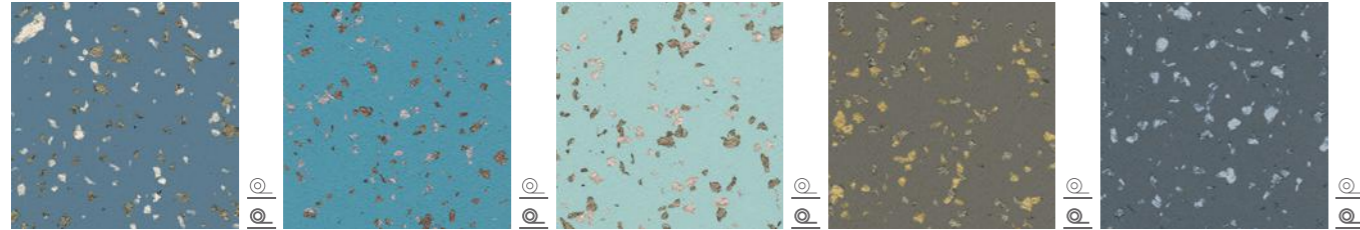


8626 Rime Y: 20.3    8627 Allegorie Y: 24.8    8621 Ode Y: 50.0    2749 Lyrique Y: 16.6    2752 Litote Y: 15


## Neopolis



2743 Central Park

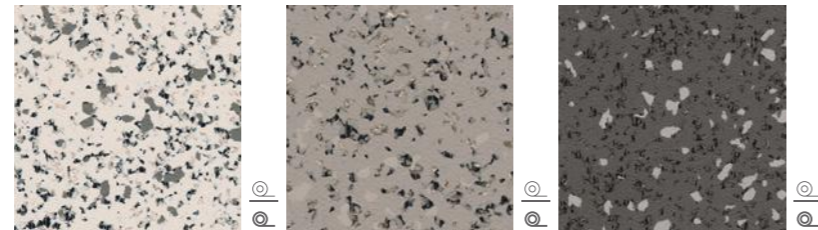

2743 Central Park Y: 52.3    2744 Queens Soft Y: 29.4    2742 Times Square Y: 14.9

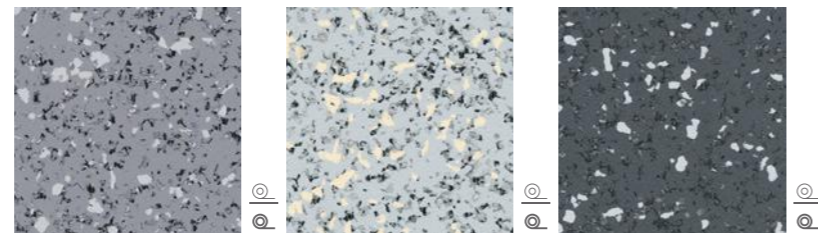

2740 Harlem Soft Y: 30    2745 Plaza Y: 53.8    2741 Brooklyn Y: 14.9

T Wear Group	R10 Slip Resistant	16 <sub>dB</sub> Quiet Underfoot Comfort - Metallic Range	17 <sub>dB</sub> Quiet Underfoot Comfort - All Other Ranges	VHD
Compact	Comfort	Evercare™	100% Recyclable	Y = Light Reflectance Value (LRV)    Weld Rods see page 234



2750 Ellipse


























# Premium

## Multilayered Flooring











- > Tough and durable, suitable for normal to high traffic areas
- > Most colour references available as both compact and comfort versions
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs
















### Indiana

 8059 Nicobar Y: 21.8	 8150 Bali Y: 39.2	 4343 Tokelau Y: 46.7	 8262 Rodrigues Y: 33.8	 4009 Tufoa Y: 66.3
 8226 Fidji Y: 35.6	 8053 Anambas Y: 22.9	 3788 Nauru Y: 42	 4002 Manua Y: 63	 4001 Ofu Y: 88.7
 7517 Faroe Y: 20.4	 8470 Samoa Y: 12.3	 8837 Songo Y: 7.3	 4004 Pago Y: 15	 4003 Tao Y: 27.5
 4526 Lasia Y: 41.5	 4469 Pemba Y: 27.9	 8850 Maupiti Y: 35.2	 4476 Wattaru Y: 12.4	 4135 Aldabra Y: 18
 4015 Guinea Y: 50	 8256 Tahaa Y: 56.5	 4142 Penang Y: 23.5	 4146 Moheli Y: 13.9	 8194 Kornati Y: 11.7

### Metallica

 9745 Cosmic Y: 28.4	 9310 Tethys Y: 28.1	 9753 Energy Y: 56.3	 9330 Moon Y: 47.9	 8257 Nyx Y: 28.0
 2746 Ymir Y: 23.9	 8623 Sedna Y: 22.5	 8624 Triton Y: 16.8	 9719 Eclipse Y: 11.3	 8625 Naiade Y: 19.2

### Brazilia

 3709 Ceara Y: 30.4	 8736 Recife Y: 54.8	 3734 Almerim Y: 52.3	 8386 Boa Vista Y: 63.7	 4342 Juara Y: 52.5
 4329 Bacabal Y: 25.9	 3707 Paraiba Y: 10.1	 4478 Copacabana Y: 16.4	 4477 Maceio Y: 35.7	 8577 Amazonas Y: 44
 8269 Ipanema Y: 47.3	 8157 Goias Y: 29.8	 4136 Sao Luis Y: 16.2		

T Wear Group	R10 Slip Resistant	16 <sub>dB</sub> Quiet Underfoot Comfort - Metallic Range	17 <sub>dB</sub> Quiet Underfoot Comfort - All Other Ranges	VHD
Compact	Comfort	Evercare™	100% Recyclable	Y = Light Reflectance Value (LRV) Weld Rods see page 234

# Taralay Multilayered Flooring

UPDATED

**Taralay Impression Compact and Acoustic** ranges are hardwearing floors that are suitable for medium to high traffic areas including hospitals, schools, commercial and public areas. The range has ultra-low whole life costs thanks to the ProtecSol®2 surface treatment which eliminates the need for polish for the full life of the flooring.

**Taralay Initial Compact and Acoustic** ranges are hardwearing floors that are suitable for normal to high traffic areas. The acoustic version offers a 19dB sound rating, which is ideal for those applications where sound insulation is key. Treated with ProtecSol® surface treatment the floors require no polish for the lifetime of the product.

**Taralay Libertex** is a new generation of Looselay flooring with an innovative MAX3 layer system for enhanced durability, acoustics and easy installation. You can save time and cost with this solution, whereby minimal sub-floor preparation is required, it offers excellent 19dB sound reduction and is hygienic and easy to clean thanks to its unique ProtecSol® surface treatment.

**hop\*** **Taralay Impression HOP** is an innovative and eco-designed solution for looselay installation. It has a double fiber frame and a calendared interlayer to bring a high level of stability even under temperature variations and heavy rolling loads. It has 15% recycled content (post-consumed) and the ProtecSol®2 surface treatment provides the best stain resistance. Glue-free for a quick and easy installation.



The ideal flooring for modern interiors

0720 Infinity Aube



Description	Taralay Impression				Taralay Initial		Taralay Libertex		
	Compact	Acoustic	Compact hop	Acoustic hop	Compact	Acoustic	Comfort		
Thickness	EN ISO 24346	mm	2.0	3.35	2.30	4.35	2.00	3.35	3.65
Wear layer thickness	EN ISO 24340	mm	0.70	0.65	0.70	0.70	0.70	0.65	0.70
Weight	EN ISO 23997	g/m <sup>2</sup>	2635	2825	3200	3670	2635	2825	2900
Width of sheet	EN ISO 24341	cm	200	200	200	200	200	200	200 / 400
Length of sheet	EN ISO 24341	lm	25	25	20	20	25	25	20
<b>Classification</b>									
Norm / Product specification	-	-	EN ISO 10582	EN ISO 11638	EN ISO 10582	EN ISO 11638	EN ISO 10582	EN ISO 11638	EN ISO 11638
European classification	EN ISO 10874	class	34-43	34-42	34-43	34-42	34-43	34-42	34
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2	< 2	< 2	< 2
Slip resistance	DIN 51130	class	R10	R10	R10	R10	R10	R10	R10
<b>Performances</b>									
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	-	group	T	T	T	T	T	T	T
Type binder content	EN ISO 10582	type	I	-	I	-	I	-	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20	≤ 0.10	≤ 0.20	≤ 0.10	≤ 0.20	≤ 0.20
Residual indentation (value)	-	mm	≈ 0.03	≈ 0.08	≈ 0.03	≈ 0.08	≈ 0.03	≈ 0.10	≈ 0.05
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Impact sound insulation	EN ISO 717-2	dB	8	19	8	19	6	19	19
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	OK	OK	OK	OK
Anti-bacterial activity (E.coli- S.aureus- MRSA) (1)	ISO 22196	-	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth
Surface treatment	-	-	ProtecSol® 2	ProtecSol® 2	ProtecSol® 2	ProtecSol® 2	ProtecSol®	ProtecSol®	ProtecSol®
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 10	< 10	< 10	< 10	< 10	< 10	< 100
<b>CE Marking</b>									
CE	EN 14041								

(1) The implementation of an effective cleaning method is the best defence against infection.

# Taralay Impression

## Multilayered Flooring

UPDATED

- > Available as both compact and acoustic versions
- > Excellent sound insulation properties (19dB) with the acoustic option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!
- > New **hop** for adhesive free installation



### Rivau Nature



1110 Rivau Nature  
Y: 30.0

### Sycamore



0727 Sycamore Vanilla  
Y: 31.1




0725 Sycamore Light Brown  
Y: 25.6

### Habana 3D



1100 Habana 3D Blossom  
Y: 35.1




1069 Habana 3D Trinidad  
Y: 24.7




1070 Habana 3D Vinales  
Y: 35.5

### Infinity



0720 Infinity Aube  
Y: 47.9




0680 Infinity Greige  
Y: 33.1

### Portobello



0773 Portobello  
Y: 25.3

### Wood Fusion



1104 Wood Fusion Nature  
Y: 28.1

T Wear Group	R10 Slip Resistant	19dB Quiet Underfoot Comfort	VHD
Compact	Acoustic	ProtecSol®2	100% Recyclable
Y = Light Reflectance Value (LRV)	Weld Rods see page 234	*Available in Taralay Impression <b>hop</b>	



1110 Rivau Nature



# Taralay Impression

## Multilayered Flooring

UPDATED

- > Available as both compact and acoustic versions
- > Excellent sound insulation properties (19dB) with the acoustic option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!
- > New **hop** for adhesive free installation



### Raintree



1077 Raintree Natural  
Y: 31.4



1076 Raintree Grey  
Y: 24.5

### Noma




0373 Noma Ice  
Y: 52.0



0519 Noma Beige  
Y: 28.5

### Moon Island



0760 Moon Island  
Y: 24.8

### Charme




1093 Charme Kraft  
Y: 26.9



0723 Charme Pecan  
Y: 24.3


### Nature Oak



1055 Nature Oak Clear  
Y: 41.2



1056 Nature Oak Dark  
Y: 25.5



1053 Nature Oak Blond  
Y: 36.8



1054 Nature Oak Brown  
Y: 22.9

### Walnut



1314 Walnut Brown  
Y: 15.8



1077 Raintree Natural

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort | VHD

Compact | Acoustic | ProtecSol®2 | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 234 | \*Available in Taralay Impression **hop**

# Taralay Impression

## Multilayered Flooring

UPDATED

- > Available as both compact and acoustic versions
- > Excellent sound insulation properties (19dB) with the acoustic option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!
- > New **hop** for adhesive free installation



### Uni Matt

1092 Uni Matt Light Beige Y: 48.2	0832 Uni Matt Grey Y: 43.0	1084 Uni Matt Jungle Grey Y: 29.0	1091 Uni Matt Corail Y: 28.4
1082 Uni Matt Light Green Y: 46.9	1080 Uni Matt Green Y: 32.6	1079 Uni Matt Dark Green Y: 14.1	1090 Uni Matt Brick Y: 23.0
1087 Uni Matt Yellow Y: 53.7	1081 Uni Matt Lagoon Y: 38.6	1078 Uni Matt Indigo Y: 34.1	1085 Uni Matt Teal Y: 17.7
1088 Uni Matt Dark Beige Y: 36.8	1089 Uni Matt Copper Y: 21.3	1086 Uni Matt Poudre Y: 29.9	1083 Uni Matt Navy Y: 9.1

T Wear Group	R10 Slip Resistant	19dB Quiet Underfoot Comfort	VHD
Compact	Acoustic	ProtecSol®2	100% Recyclable
Y = Light Reflectance Value (LRV)	Weld Rods see page 234	*Available in Taralay Impression <b>hop</b>	



1092 Uni Matt Light Beige / 1103 Happy Number

# Taralay Impression


## Multilayered Flooring

UPDATED

- > Available as both compact and acoustic versions
- > Excellent sound insulation properties (19dB) with the acoustic option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!
- > New **hop** for adhesive free installation




### Pure Wool

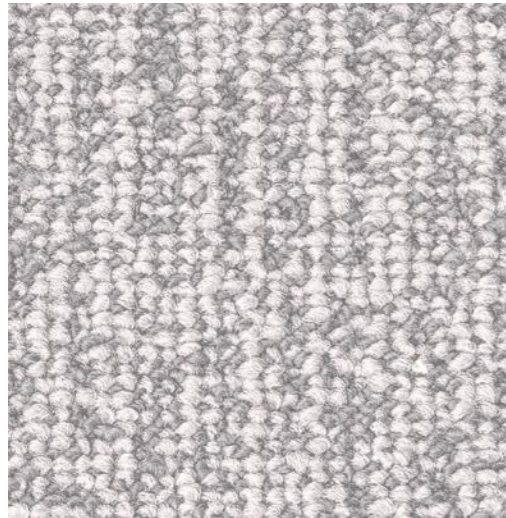

1072 Pure Wool Grey  
Y: 40.0



1073 Pure Wool Beige  
Y: 48.6




1074 Pure Wool Teal  
Y: 32.3




1071 Pure Wool Taupe  
Y: 25.0


### Cemento



1026 Cemento Roma  
Y: 37.8




0543 Cemento Brescia  
Y: 32.5




1024 Cemento Napoli  
Y: 33.8




1029 Rough Grey  
Y: 34.2



1057 Riverside  
Y: 13.0



0524 Cemento Capri  
Y: 21.8



0523 Cemento Genova  
Y: 43.1



1025 Cemento Firenze  
Y: 22.0



1028 Rough Beige  
Y: 37.8

### Rough

### Riverside

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort | VHD

Compact | Acoustic | ProtecSol®2 | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 234 | \*Available in Taralay Impression **hop**



1072 Pure Wool Grey

# Taralay Impression


## Multilayered Flooring

UPDATED

- > Available as both compact and acoustic versions
- > Excellent sound insulation properties (19dB) with the acoustic option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!
- > New **hop** for adhesive free installation



### Jungle

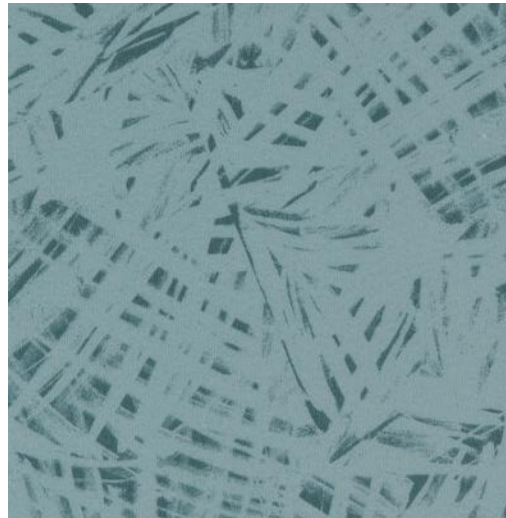

1039 Jungle Green  
Y: 23.6



1040 Jungle Grey  
Y: 46.9




1038 Jungle Copper  
Y: 32.6

### Finesse




1064 Finesse Nature  
Y: 37.6



1063 Finesse Brown  
Y: 36.0




1066 Finesse Poudre  
Y: 40.5




1065 Finesse Paille  
Y: 44.5


### Gentlemen




0770 Gentlemen Clear  
Y: 46.2




1067 Gentlemen Black & White  
Y: 34.0



1068 Gentlemen Denim  
Y: 23.2



1049 Metallic Silver  
Y: 49.2



1048 Metallic Gold  
Y: 43.1

### Metallic



1039 Jungle Green / 1079 Uni Matt Dark Green

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort | VHD

Compact | Acoustic | ProtecSol®2 | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 234 | \*Available in Taralay Impression **hop**

# Taralay Impression


## Multilayered Flooring

UPDATED

- > Available as both compact and acoustic versions
- > Excellent sound insulation properties (19dB) with the acoustic option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!
- > New **hop** for adhesive free installation




### Nest

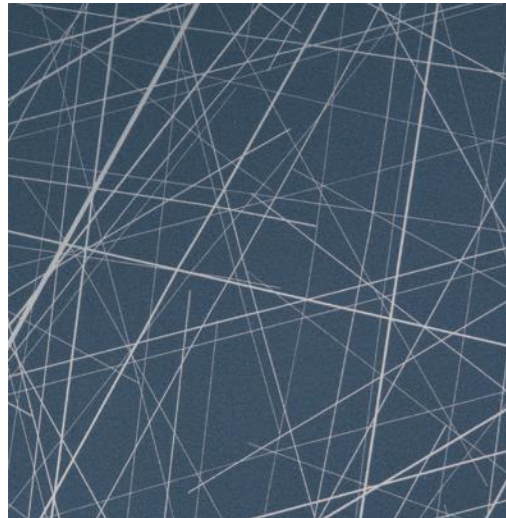

1051 Nest Blue  
Y: 11.8




1052 Nest White  
Y: 54.8




0745 Nest Metal  
Y: 29.2


### Terrazzo



1058 Terrazzo Black & White  
Y: 68.0




1060 Terrazzo Napoli  
Y: 63.7



1059 Terrazzo Brescia  
Y: 52.0

### Envol



1099 Envol Forest  
Y: 48.0



1098 Envol Black & White  
Y: 44.4

### Rice



0763 Rice Greige  
Y: 48.5



0736 Rice Champagne  
Y: 37.5



0737 Rice Souris  
Y: 30.1

### Chess



1041 Chess Black & White  
Y: 36.7



1051 Nest Blue

T Wear Group	R10 Slip Resistant	19dB Quiet Underfoot Comfort	VHD
Compact	Acoustic	ProtecSol®2	100% Recyclable
Y = Light Reflectance Value (LRV)	Weld Rods see page 234	*Available in Taralay Impression <b>hop</b>	

# Taralay Impression


## Multilayered Flooring

UPDATED


- > Available as both compact and acoustic versions
- > Excellent sound insulation properties (19dB) with the acoustic option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!




### Kubes

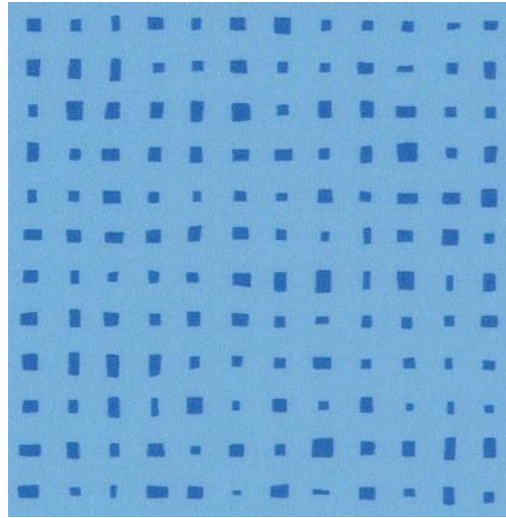


1050 Kubes Indigo  
Y: 30.0




0755 Kubes White  
Y: 64.0




1047 Kubes Lemon  
Y: 52.9




1046 Kubes Anis  
Y: 51.3



1027 Kubes Corail  
Y: 30.4




1030 Kubes Fuschia  
Y: 20.2




1031 Kubes Carmine  
Y: 13.1


### Flipkube




1045 Flipkube White  
Y: 42.7




1043 Flipkube Garden  
Y: 18.6



1075 Flipkube Purple  
Y: 16.2




1044 Flipkube Lagoon  
Y: 26.7




1042 Flipkube Indigo  
Y: 16.7


### Nido




1035 Nido Grey  
Y: 62.1




1062 Nido Beige  
Y: 47.6



1036 Nido Brick  
Y: 24.1



1037 Nido Teal  
Y: 22.5

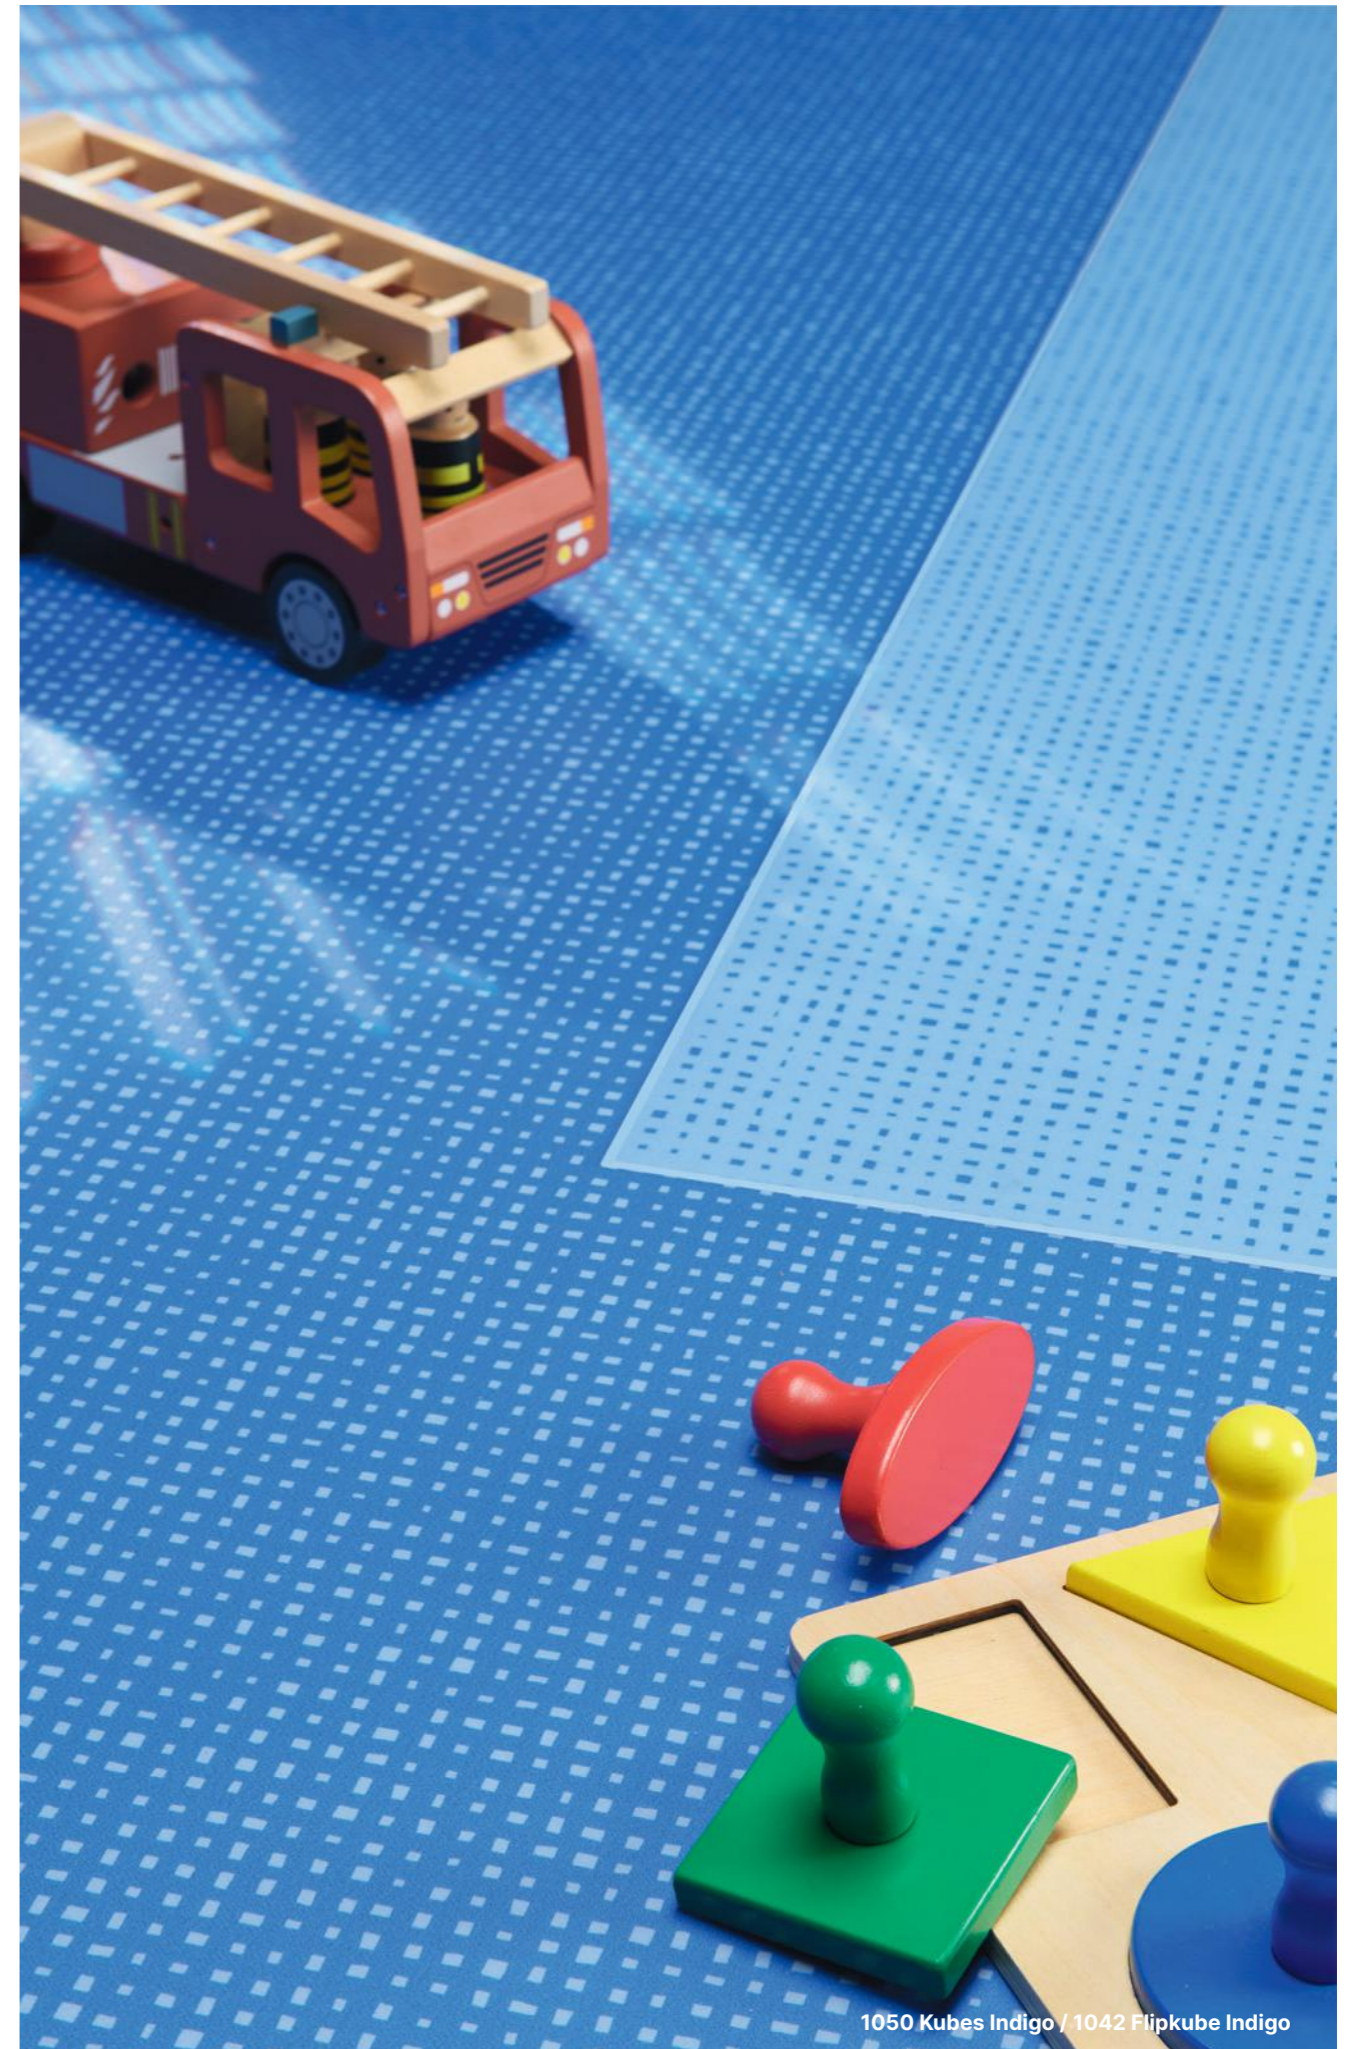

1050 Kubes Indigo / 1042 Flipkube Indigo

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort | VHD

Compact | Acoustic | ProtecSol®2 | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 234 | \*Available in Taralay Impression hop

# Taralay Impression


## Multilayered Flooring

UPDATED

- > Available as both compact and acoustic versions
- > Excellent sound insulation properties (19dB) with the acoustic option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!



### Happy Road

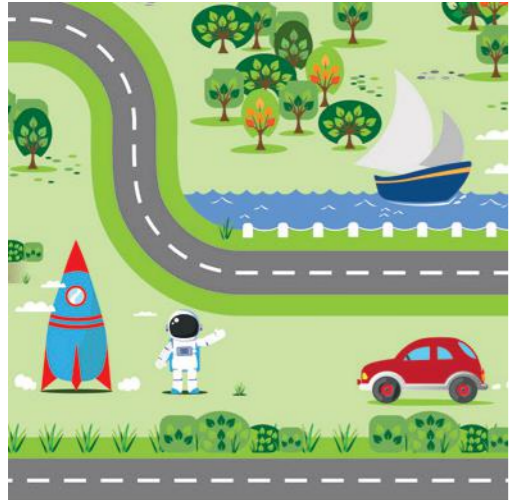

0923 Happy Road  
Y: 56.9

### Happy Form



1101 Happy Form



1101 Happy Form  
Y: 61.3

### Happy Number



1078 Uni Matt Indigo / 1102 Happy Number Blue



1102 Happy Number Blue  
Y: 24.9



1103 Happy Number Grey  
Y: 64.9



0923 Happy Road

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort | VHD

Compact | Acoustic | ProtecSol®2 | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 234 | \*Available in Taralay Impression hop

UPDATED

# Beyond the norm

As you are unique and each of your projects represents a new challenge, Gerflor gives you the chance to stand out, from 50sqm.

One atmosphere, one style, one floor, but several possibilities...

## 3 possibilities




### 1 - COLOUR

the possibility to recolour 32 designs in the Taralay Impression range as you wish



1

Select a design\* from the Taralay Impression range




2

Change the colour scheme as you wish



3

Receive your floor sample within 10 days of acceptance of your inquiry by Gerflor



4

Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order

\* from among 32 eligible designs (see Brochure My Taralay Impression)

"ENVOL" DESIGN  
STANDARD COLOUR SCHEME



CUSTOMISED COLOUR 1



CUSTOMISED COLOUR 2



Minimum order: 50 m<sup>2</sup> (special pricing system)


If you have any questions (pricing, feasibility, technical information), do not hesitate to contact your sales representative





## 2 - COLLECTION

the possibility to select from among **50 exclusive designs**




1

Draw inspiration from Gerflor's 50 exclusive designs and change, if you so wish, the design's colour scheme on [www.myfloorbygerflor.com](http://www.myfloorbygerflor.com)




2

View your customised design on your computer screen before approving it



3

Receive your floor sample within 10 days of acceptance of your inquiry by Gerflor



4

Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order



## 3 - CUSTOMISATION

the possibility to make your floor unique




1

Send us your own file in accordance with the process described in our **specifications**




2

Approval by our technical team



3

Receive your floor sample within 10 days and before all of your floor is made



4

Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order



File formats accepted



Files free from copyright only




300 DPI resolution



RAL, Pantone and NCS colour reference



To enhance the visual identity of your company or that of your clients, you can have your logo printed across the width of the roll.



- No metallic ink
- No printing on a plain background
- Design only across the width (2 m)
- No continuity of designs over several rolls



Minimum order: 50 m<sup>2</sup> (special pricing system)  
If you have any questions (pricing, feasibility, technical information), do not hesitate to contact your sales representative



Minimum order: contact your sales representative

# Taralay Initial

## Multilayered Flooring

- > Available as both compact and acoustic versions
- > Excellent sound insulation properties (19dB) with the acoustic option
- > Tough and durable, suitable for normal to high traffic areas
- > Protecsol® surface treatment, no polish for life!

### Spider



0957 Spider Cuivre  
Y: 35.1




0954 Spider Dore  
Y: 39.6

### Miami




0950 Miami Sable  
Y: 38.3




0966 Miami Abricot  
Y: 35.1



0952 Miami Soleil  
Y: 35.8




0973 Spider Alu  
Y: 21.5




0955 Spider Perle  
Y: 38.7



0963 Miami Perle  
Y: 43.0




0964 Miami Souris  
Y: 24.9




0970 Miami Taupe  
Y: 20.7



0956 Spider Grenat  
Y: 15.9



0976 Spider Quartz  
Y: 29.4




0951 Miami Litchee  
Y: 18.9




0974 Spider Saphir  
Y: 22.8



0968 Miami Ciel  
Y: 37.7




0967 Miami Mer  
Y: 19.7



0975 Spider Emeraude  
Y: 11.9




0965 Miami Foret  
Y: 24.5



0969 Miami Paon  
Y: 10.8

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort

Compact Acoustic | Protecsol® | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 234

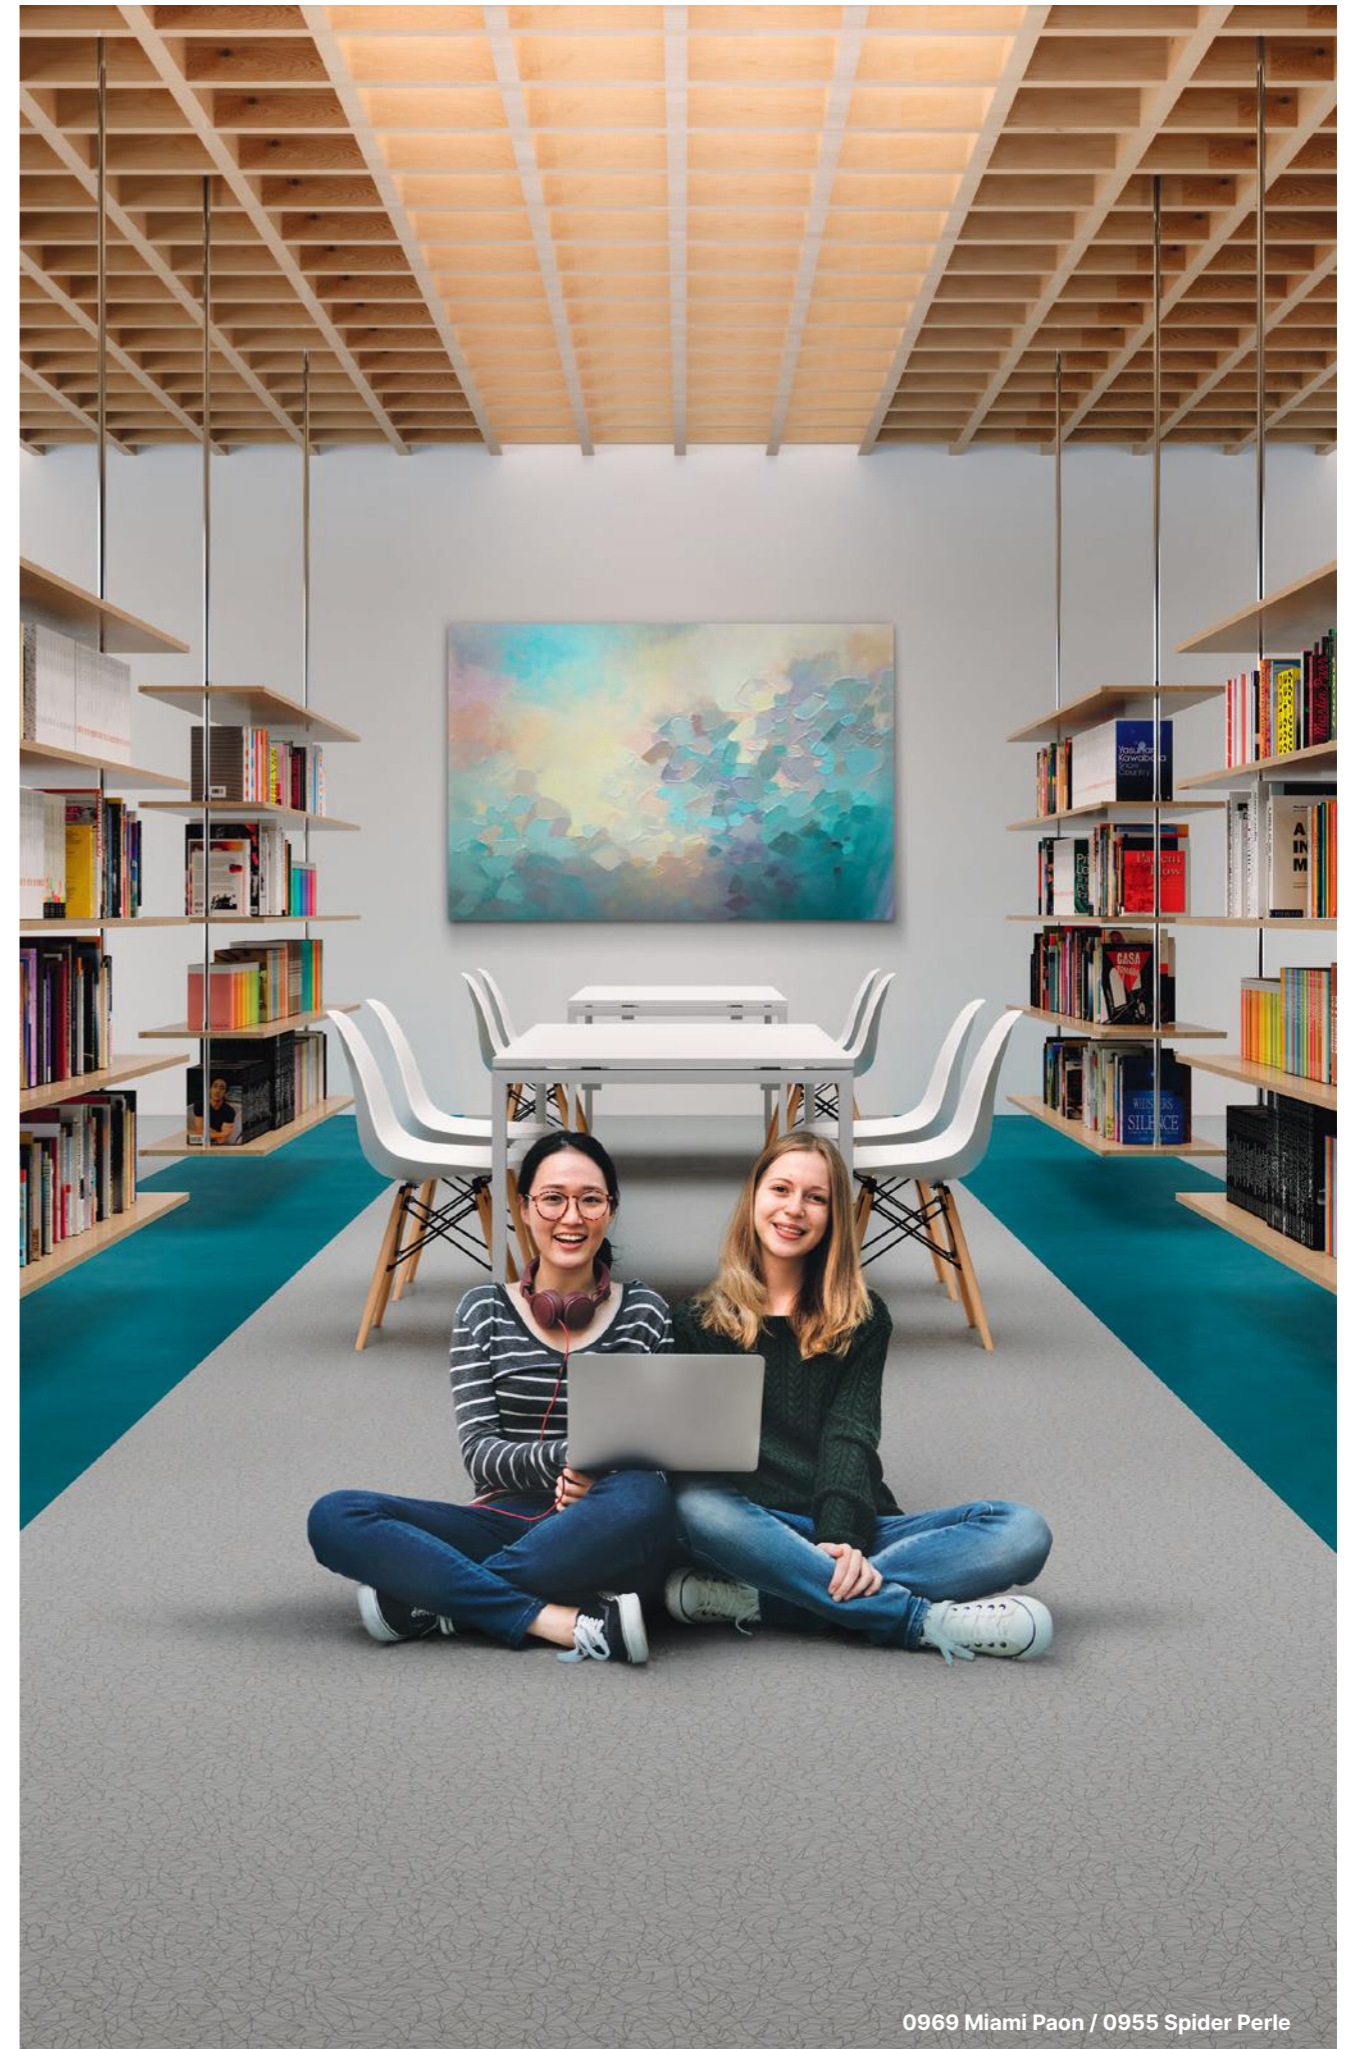

0969 Miami Paon / 0955 Spider Perle

# Taralay Initial

## Multilayered Flooring

- > Available as both compact and acoustic versions
- > Excellent sound insulation properties (19dB) with the acoustic option
- > Tough and durable, suitable for normal to high traffic areas
- > Protecsol® surface treatment, no polish for life!

### Ranch



0773 Ranch  
Y: 23.5




0953 Ranch Anthracite  
Y: 16.4

### Filament



0826 Filament Grey  
Y: 39.4



0799 Filament Light  
Y: 31.7

### Bostonian



0961 Bostonian Honey  
Y: 27.6



0959 Bostonian Brown  
Y: 14.7




0960 Bostonian Grey  
Y: 14.4

### Noma



0698 Noma Naturel  
Y: 36.2




0588 Noma Clair  
Y: 36.5


### Twist




0979 Twist White  
Y: 60.0



0977 Twist Grey  
Y: 19.5




0978 Twist Blond  
Y: 46.1




0980 Twist Brown  
Y: 18.0


### Habana



0797 Habana Ivory  
Y: 52.7



0828 Habana Beige  
Y: 35.8



0636 Esterel Blond  
Y: 25.6

### Renzo



0590 Renzo Steel  
Y: 14.5

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort

Compact | Acoustic | Protecsol® | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 234




0977 Twist Grey

# Taralay Initial


## Multilayered Flooring

- > Available as both compact and acoustic versions
- > Excellent sound insulation properties (19dB) with the acoustic option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol® surface treatment, no polish for life!

### Diversion

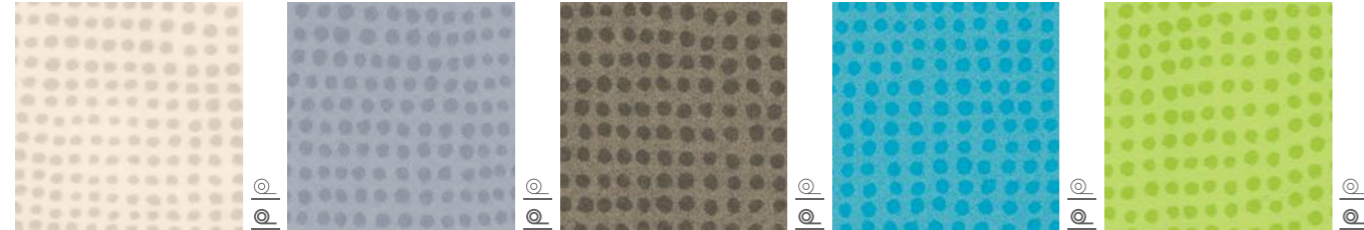


0047 Diversion Ivoire Y: 60.7    0824 Diversion Souris Y: 36.7    0049 Diversion Carbone Y: 13.7    0825 Diversion Turquoise Y: 30.5    0515 Diversion Kiwi Y: 45.0

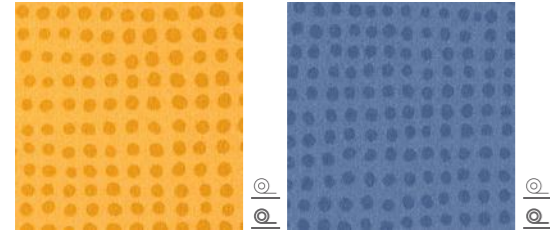


0949 Diversion Soleil Y: 40.8    0962 Diversion Marine Y: 16.2

### Strada

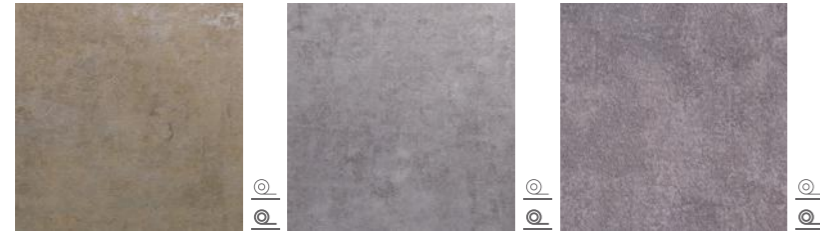

0791 Strada Metallic Y: 22.3    0790 Strada Chrome Y: 21.4    0465 Strada Ciment Y: 25.7

### Urban

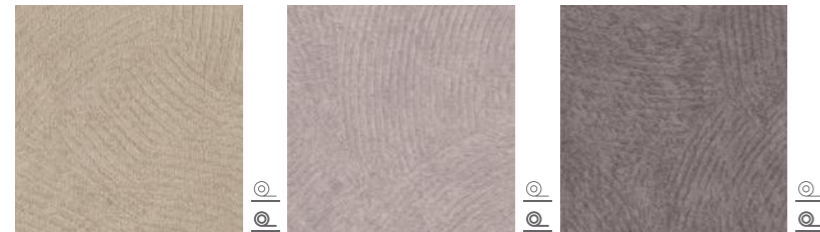

0958 Urban Beige Y: 34.0    0037 Urban Souris Y: 34.8    0035 Urban Gris Y: 24.1

T Wear Group    R10 Slip Resistant    19dB Quiet Underfoot Comfort

Compact    Acoustic    ProtecSol®    100% Recyclable    Y = Light Reflectance Value (LRV)    Weld Rods see page 234



0949 Diversion Soleil


# Taralay Libertex

## Multilayered Flooring

- > Available in comfort only. Excellent sound insulation properties (19dB)
- > Looselay product with innovative MAX3 3-layer system: Direct laying, No dry time, No activity loss
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol® surface treatment, no polish for life!



### Legend



2243 Legend Chestnut  
Y: 31.0




2242 Legend Country  
Y: 26.0




1430 Legend Grey  
Y: 30.7

### Pure Oak




0720 Pure Oak Clear  
Y: 41.2




1751 Pure Oak Grey  
Y: 33.5


### Skandi Oak



2246 Skandi Oak Toffee  
Y: 25.0



2245 Skandi Oak Natural  
Y: 28.0



2244 Skandi Oak Clear  
Y: 43.0

### Hossegor




2247 Hossegor Latte  
Y: 38.3




2241 Cacoon Silver Brown  
Y: 34.0


### Reflect




2249 Reflect Sea  
Y: 23.7




2250 Reflect Forest  
Y: 43.2



2251 Reflect Sunny  
Y: 28.3



2252 Reflect Flower  
Y: 17.6




1785 Reflect Earth  
Y: 32.0

### Amsterdam




2253 Reflect Silver  
Y: 30.5



2151 Amsterdam Light Grey  
Y: 39.0



2152 Amsterdam Grey  
Y: 26.0




2153 Amsterdam Anthracite  
Y: 12.0

### Paros



2248 Paros Clear  
Y: 43.0

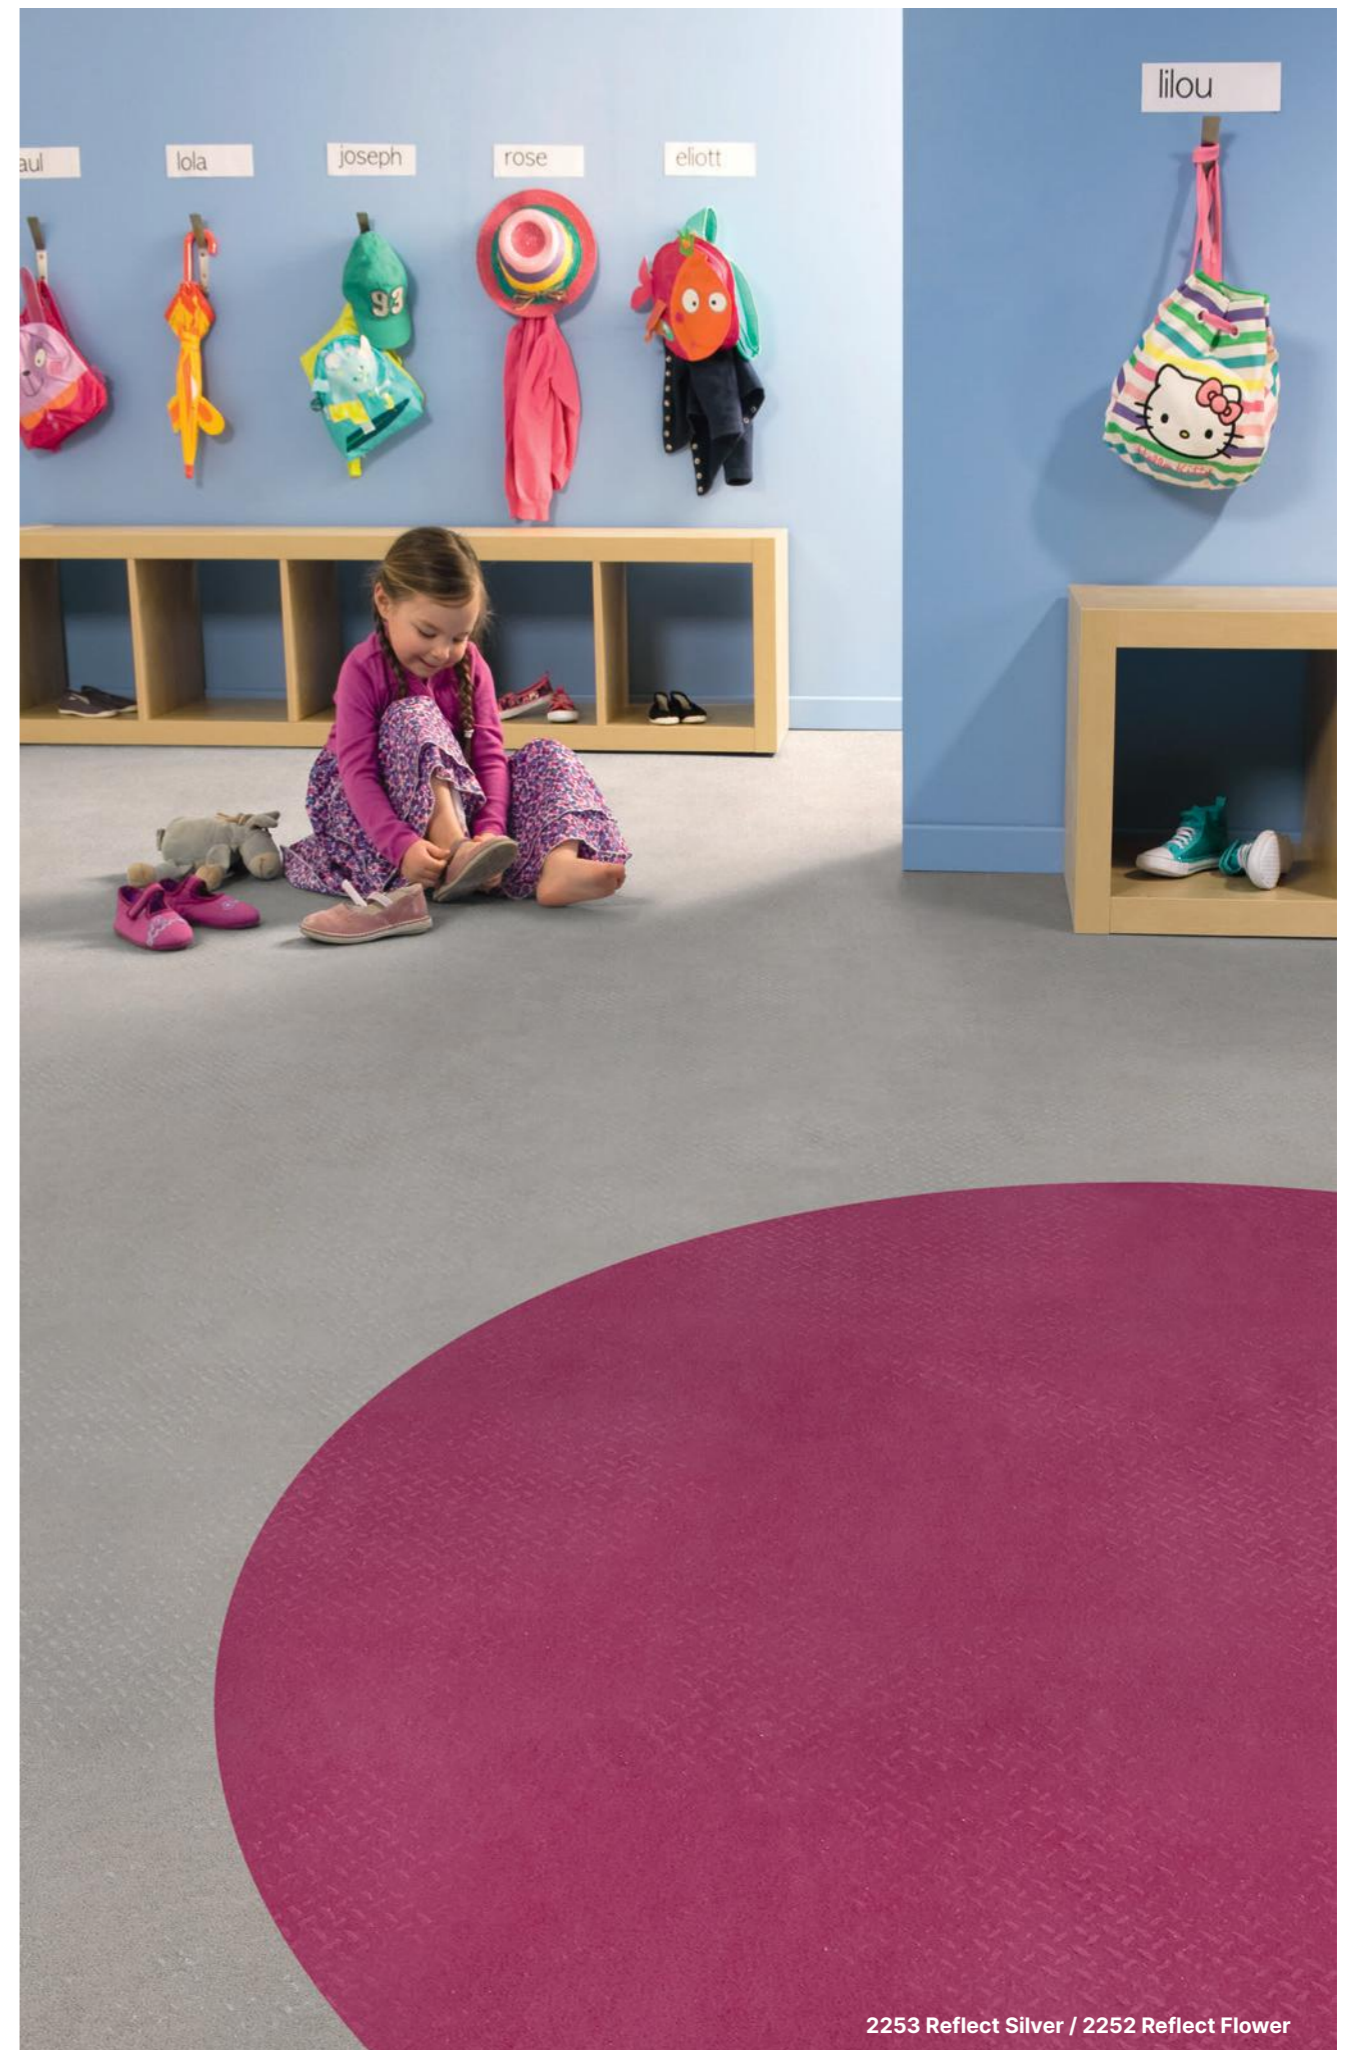

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort

Textile Backing | ProtecSol® | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 234

2253 Reflect Silver / 2252 Reflect Flower

# Nerok Multilayered Vinyl Flooring

**Nerok 55 & 70 Compact** is a multilayered vinyl floor covering available in 2m and 4m wide sheet, with a group T wear rating.

The product comprises a compacted backing reinforced with a glass fibre veil and a printed design that is protected by a transparent wearlayer.

It offers a -6 dB sound insulation and a resistance to indentation of 0.05 mm. This flooring is protected by the surface treatment, PUR+ mat, ensuring easy maintenance and no required polish for the entire lifetime of the product. It does not contain any heavy metals or CMR 1&2 components, 100% compliant with REACH. The product emission rate of volatile organic compounds is <math><100\mu\text{g}/\text{m}^3</math> (TVOC after 28 days ISO 16000-6). It is 100% recyclable.

**Nerok 55 & 70 Acoustic** is a multilayered vinyl floor covering available in 2m and 4m wide sheet, with a group T wear rating. The product comprises a foam backing reinforced with a glass fibre veil and a printed design that is protected by a transparent wearlayer. It offers a -19 dB sound insulation and a resistance to indentation of 0.10mm.

This flooring is protected by the surface treatment, PUR+ mat, ensuring easy maintenance and no required polish for the entire lifetime of the product. It does not contain any heavy metals or CMR 1&2 components, 100% compliant with REACH. The product emission rate of volatile organic compounds is <math><100\mu\text{g}/\text{m}^3</math> (TVOC after 28 days ISO 16000-6). It is 100% recyclable.



1893 Harbor Blue




Description	Nerok 55		Nerok 70			
	Compact	Acoustic	Compact	Acoustic		
<b>Thickness</b>	EN ISO 24346	mm	2.00	3.35	2.00	3.45
<b>Wear layer thickness</b>	EN ISO 24340	mm	0.55	0.55	0.70	0.70
<b>Weight</b>	EN ISO 23997	g/m <sup>2</sup>	2560	2400	2670	2500
<b>Width of sheet</b>	EN ISO 24341	cm	200 / 400	200 / 400	200 / 400	200 / 400
<b>Length of sheet</b>	EN ISO 24341	lm	20	20	20	20
<b>Classification</b>						
Norm / Product specification	-	-	EN ISO 10582	EN 651	EN ISO 10582	EN 651
European classification	EN ISO 10874	class	33 - 42	33 - 42	34 - 43	34 - 42
Impact sound insulation	EN ISO 717-2	dB	6	19	6	19
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip resistance	DIN 51130	class	R10	R10	R10	R10
<b>Performances</b>						
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0	< 2.0	≤ 2.0	< 2.0
Wear group	QB 30	group	T	T	T	T
Type binder content	EN ISO 10582	type	I	-	I	-
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20	≤ 0.10	≤ 0.20
Residual indentation (measured value)	-	mm	0.05	0.10	0.05	0.10
Castor chair test (type H)	ISO 4918	-	OK	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	OK
Surface treatment	-	-	PUR+	PUR+	PUR+	PUR+
<b>Environment / Indoor Air Quality</b>						
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 100	< 100	< 100	< 100
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®
<b>CE Marking</b>						
CE	EN 14041					

# Nerok 55 & 70

## Multilayered Vinyl Flooring

- > Tough & durable, Nerok 55 is suitable for medium traffic areas and Nerok 70 is ideal for heavy traffic areas
- > Realistic wood & mineral designs are enhanced with an exclusive emboss for a natural look
- > Also available in Acoustic backing which provides excellent sound insulation properties (19dB)
- > Selected Nerok 70 Compact designs are in stock for fast delivery

### Wood

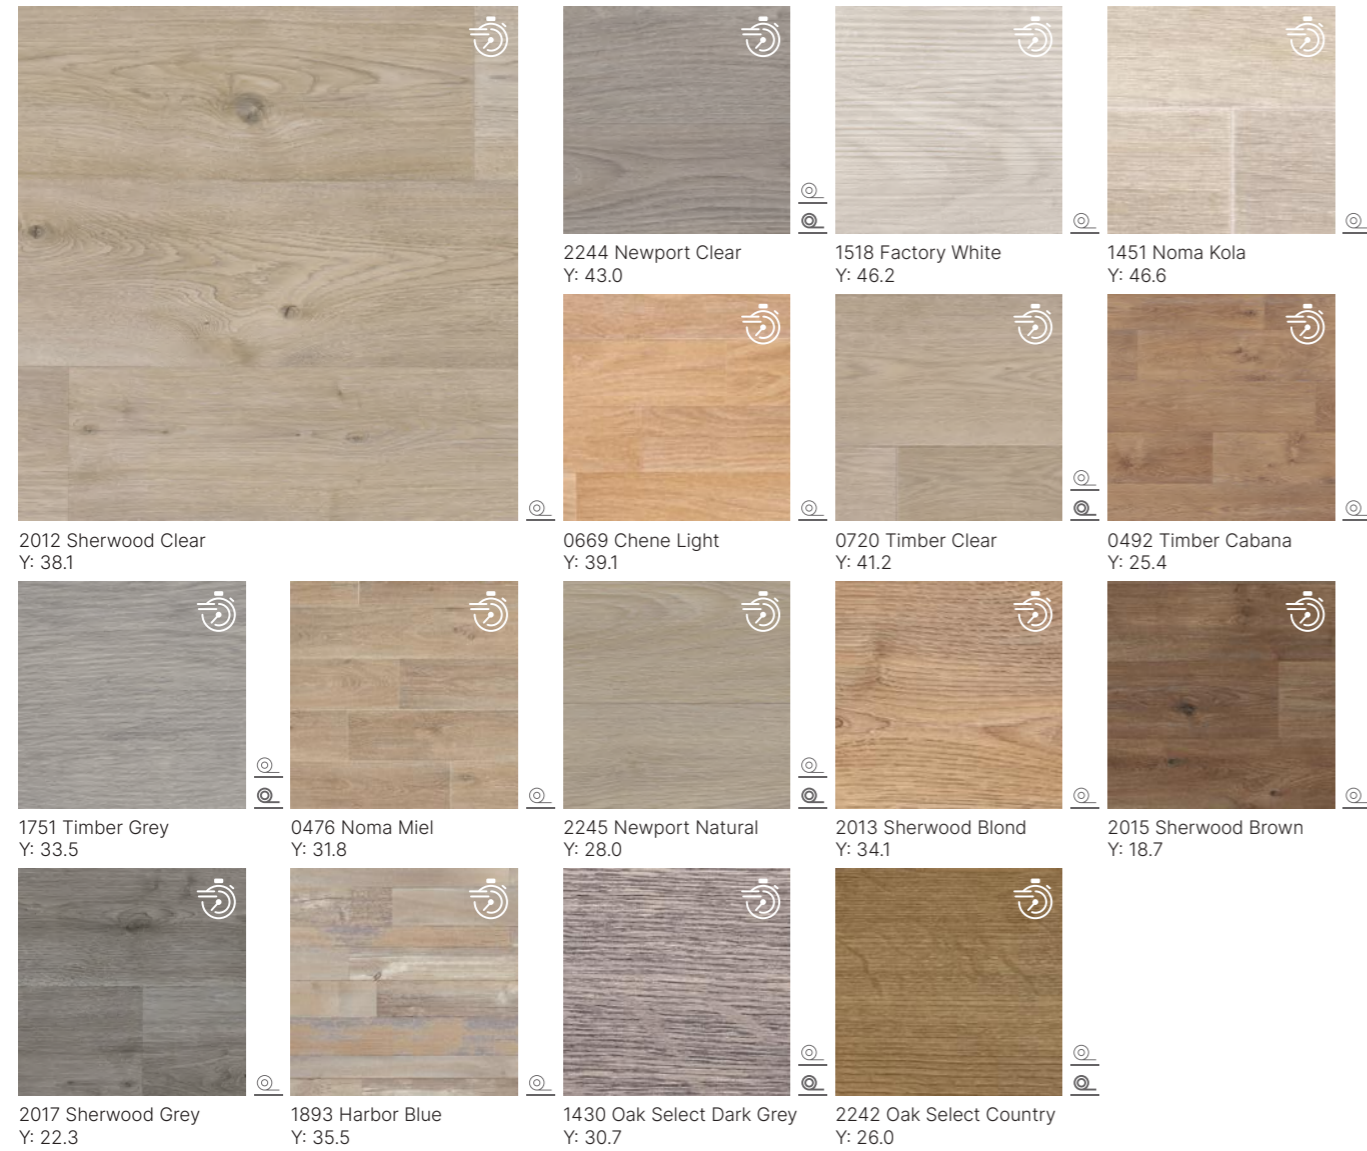

2012 Sherwood Clear

<b>0.55mm</b> Wear Layer	<b>0.7mm</b> Wear Layer	<b>T</b> Wear Group	<b>R10</b> Slip Resistant	<b>19dB</b> Quiet Underfoot Comfort
Compact	Acoustic	<b>PUR+</b>	100% Recyclable	<b>Y</b> = Light Reflectance Value (LRV)
			Stocked for quick delivery see page 4	Weld Rods see page 234

# Nerok 55 & 70


## Multilayered Vinyl Flooring

- > Tough & durable, Nerok 55 is suitable for medium traffic areas and Nerok 70 is ideal for heavy traffic areas
- > Realistic wood & mineral designs are enhanced with an exclusive emboss for a natural look
- > Also available in Acoustic backing which provides excellent sound insulation properties (19dB)

### Concrete



### Pixel

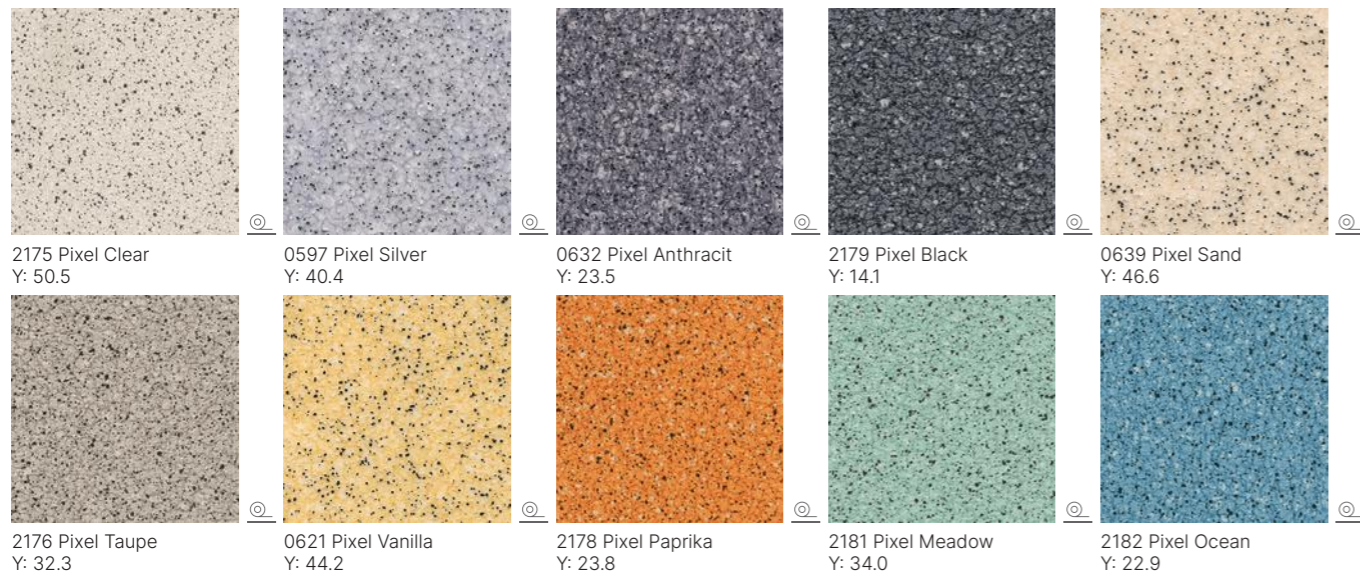

<b>0.55mm</b> Wear Layer	<b>0.7mm</b> Wear Layer	<b>T</b> Wear Group	<b>R10</b> Slip Resistant	<b>19dB</b> Quiet Underfoot Comfort
<b>Compact</b> Acoustic	<b>PUR+</b>	<b>100%</b> Recyclable	<b>Y</b> = Light Reflectance Value (LRV)	Weld Rods see page 234



2151 Shade Light Grey



# Vinyl Sports Flooring



**Taraflex®** sports flooring is the number 1 preferred indoor solution for over 60 years. It has been selected for every Olympic Games since Montreal in 1976. Leading sports events organisers and national governing bodies put their faith in Taraflex® as it offers the highest levels of performance, comfort and safety. Every sports person has, regardless of their ability, played at least once in their life time on a Taraflex® sports floor.

**Taraflex®** flooring is specifically designed for both sporting and non-sporting activities. Catering for elite sporting performance and everyday education and community life.

**Taraflex®** is versatile enough to be used in various multi-specialist applications and affordable for all new projects and refurbishments. Our sports flooring solutions are used within the education, community, leisure, health & fitness sectors.

**Taraflex® SL** combines an easy, fast and sustainable installation with the high-quality standards of Gerflor: ease of maintenance, great sports performances and durability. No glue, no compromise.



Taraflex® is the most widely specified sports surface in the world

6211 Gold

Taraflex®										
				Comfort	Performance + Performance SL	Evolution + Evolution SL	Multi-Use	Recreation	Surface	


Description				Triple Action Protectsol®	Triple Action Protectsol®	Triple Action Protectsol®	Triple Action Protectsol®	PUR Protect®	Triple Action Protectsol®		
Surface treatment	-	-	-	D-Max™	D-Max™	D-Max™	D-Max™	100% PVC	D-Max™		
Surface complex	-	-	-	CXP-HD™	Performance CXP-HD™ Performance SL Double Density CXP-HD™	Evolution CXP-HD™ Evolution SL Double Density CXP-HD™	CXP-HD+™	Closed cell foam	-		
Foam	-	-	-	12.5	9:35 Per Ω	7.5	6.2	6	2		
Thickness	EN ISO 24346	mm	-	5.1	5.2	4.6 Evo 4.65 SL	4.2	3.7	2.9		
Weight	EN ISO 24341	lm	-	26.5 Max	26.5 Max	26.5 Max	26.5 Max	20.5 STD	26.5 Max		
Length*	EN ISO 24341	lm	-	1.5	1.5	1.5	1.5	1.5	1.5		
Width	Sport Properties										
Shock absorption	EN 14808	%	≥ 25	P3	P2	P1	P1	P1	-		
Impact Protection Index (IPI)	AC-P90-205	%	-	89	82	76	52	70**	-		
Vertical deformation	EN 14809	mm	≤ 3.5	≤ 3.5	≤ 3	≤ 2	≤ 2	≤ 3.5	≤ 2		
Energy return	NF P 90 203	m/s	≥ 0.31	≥ 0.31	≥ 0.31	≥ 0.31	≥ 0.31	≥ 0.31	-		
Sliding coefficient	EN 13036-4	-	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110		
Ball bounce	EN 12235	%	≥ 90	≥ 90	≥ 90	≥ 90	≥ 90	≥ 90	≥ 90		
Technical Characteristics											
Abrasion resistance	EN ISO 5470-1	mg	≤ 1000	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350		
Impact resistance	EN 1517	N/m	≥ 8	≥ 8	≥ 8	≥ 8	≥ 8	≥ 8	≥ 8		
Indentation resistance	EN 1516	mm	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5		
Specialist solutions	-	-	-	-	DA	DA	DA	-	-		
Classification											
Fire	EN 13501-1	-	-	Cfl-s1	Cfl-s1	Cfl-s1	Cfl-s1	Cfl-s1	Bfl-s1		
Anti-bacterial activity (E. coli - S. aureus - MRSA) (1)	ISO 22196	-	-	> 99% inhibits growth							
CE Marking											
CE	EN 14041			Fire Shock Absorption Sliding Coefficient Abrasion Resistance Rolling load Resistance							

The proposed specifications fall within the tolerance limits usually accepted on this sector whilst still complying with standards.

(1) The implementation of an effective cleaning method is the best defence against infection.

\* For different roll lengths please contact us.

\*\* Estimated value.



# Taraflex® Comfort

## Vinyl Sports Flooring

UPDATED

- > Offers the highest comfort and shock absorption to prevent long-term injuries and immediate injuries upon impact
- > The first Taraflex® sports floor in the P3 category (complies with EN Standard 14904) ≥45% of shock absorption
- > Triple action ProtecSol® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > Suitable for all levels and all sports
- > Modern and ultra-realistic wood design range, with new maple wood designs produced using actual scans of our world class Connor maple hardwood flooring



5763 Maple Sun / 2404 London Light Blue

# Taraflex® Performance + Performance SL

## Vinyl Sports Flooring

UPDATED

- > Taraflex® Performance is ideal for a variety of applications including all kinds of sports and leisure activities
- > P2 category sports flooring (complies with EN Standard 14904) 35 to 45% of shock absorption
- > Triple action ProtecSol® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > Easy, fast and sustainable installation, no need for additional moisture barriers (Performance SL)
- > Modern and ultra-realistic wood design range, with new maple wood designs produced using actual scans of our world class Connor maple hardwood flooring



Weld Rods  
see page 234



6758 Silver Gray / 2404 London Light Blue

# Taraflex® Evolution + Evolution SL


## Vinyl Sports Flooring

UPDATED

- > P1 category (complies with EN Standard 14904) 25 to 35% of shock absorption
- > Triple action ProtecSol® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > Suitable for all types of sports and leisure activities
- > Easy, fast and sustainable installation, no need for additional moisture barriers (Evolution SL)
- > Modern and ultra-realistic wood design range, with new maple wood designs produced using actual scans of our world class Connor maple hardwood flooring



Y = Light Reflectance Value (LRV) | Weld Rods see page 234



5763 Maple Sun

# Taraflex® Multi-use


## Vinyl Sports Flooring

UPDATED


- > A real sports floor in the P1 category (complies with EN Standard 14904) 25 to 35% of shock absorption
- > Triple action ProtecSol® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > Suitable for all types of sports and leisure activities
- > Excellent indentation resistance and recovery from tables and chairs
- > Modern and ultra-realistic wood design range, with new maple wood designs produced using actual scans of our world class Connor maple hardwood flooring




6373 Maple Ocean  
Y: 21.1




6391 Maple Stone  
Y: 30.6




6379 Maple Desert  
Y: 23.2




6392 Maple Earth  
Y: 10.2



6844 Black Strips  
Y: 14.5




6350 Light Cherry  
Y: 43.3




5742 Wood Oak  
Y: 27.8



6430 Blue  
Y: 8.0




6557 Forest  
Y: 10.9



6758 Silver Gray  
Y: 32.6



6180 Red  
Y: 9.8



6390 Maple Lava  
Y: 9.7

Weld Rods  
see page 234



ProtecSol®



P1



Y = Light Reflectance Value (LRV)




6373 Maple Ocean / 6391 Maple Stone

# Taraflex® Recreation

## Vinyl Sports Flooring

- > P1 category (complies with EN Standard 14904) 25 to 35% of shock absorption
- > PUR Protect® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > Suitable for light leisure and sporting activities

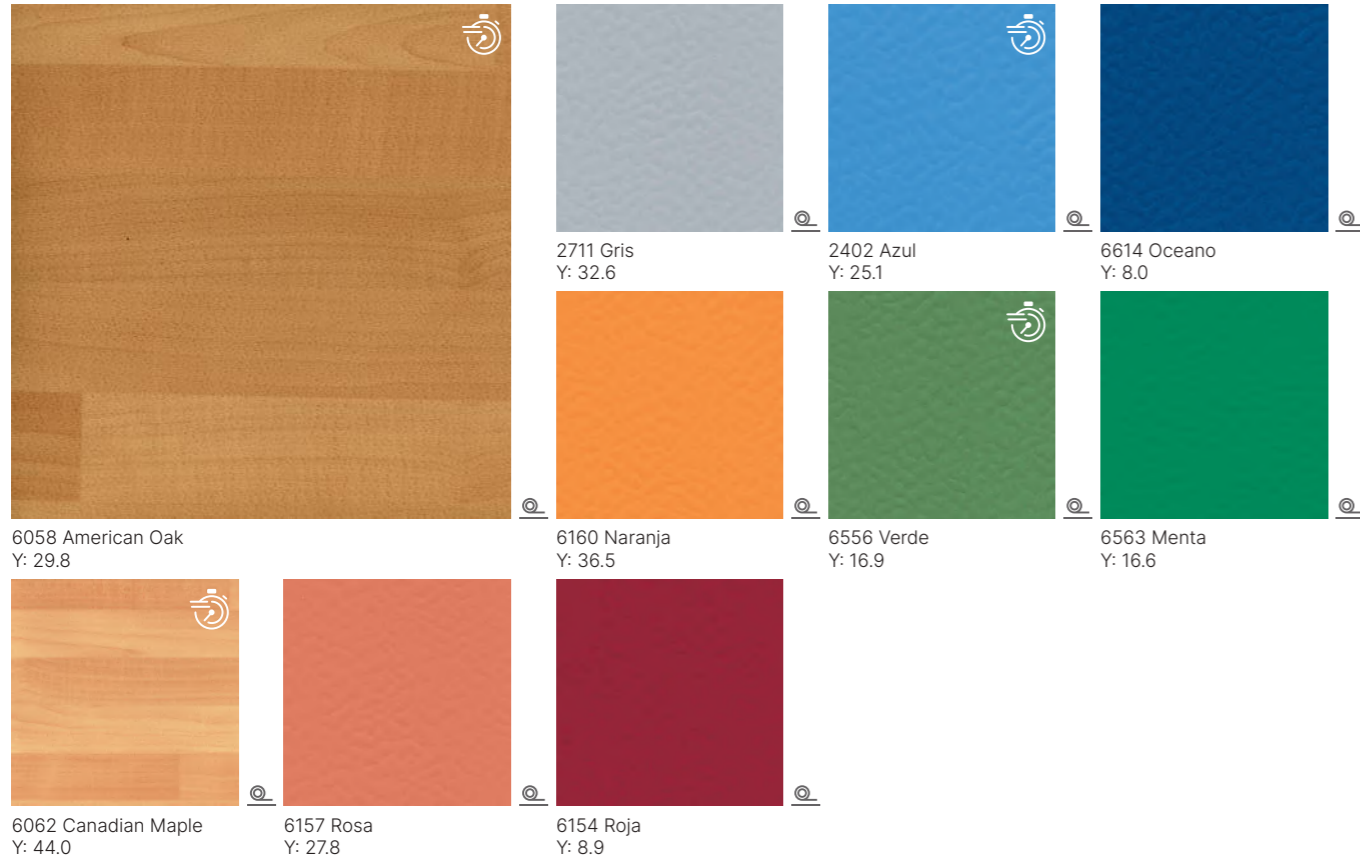

Y = Light Reflectance Value (LRV) | Weld Rods see page 234



6058 American Oak



# Taraflex® Surface


## Vinyl Sports Flooring

UPDATED

- > Ideal for rolling sports and heavy duty multipurpose usage
- > Triple action ProtecSol® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > Modern and ultra-realistic wood design range, with new maple wood designs produced using actual scans of our world class Connor maple hardwood flooring




**ProtecSol®**

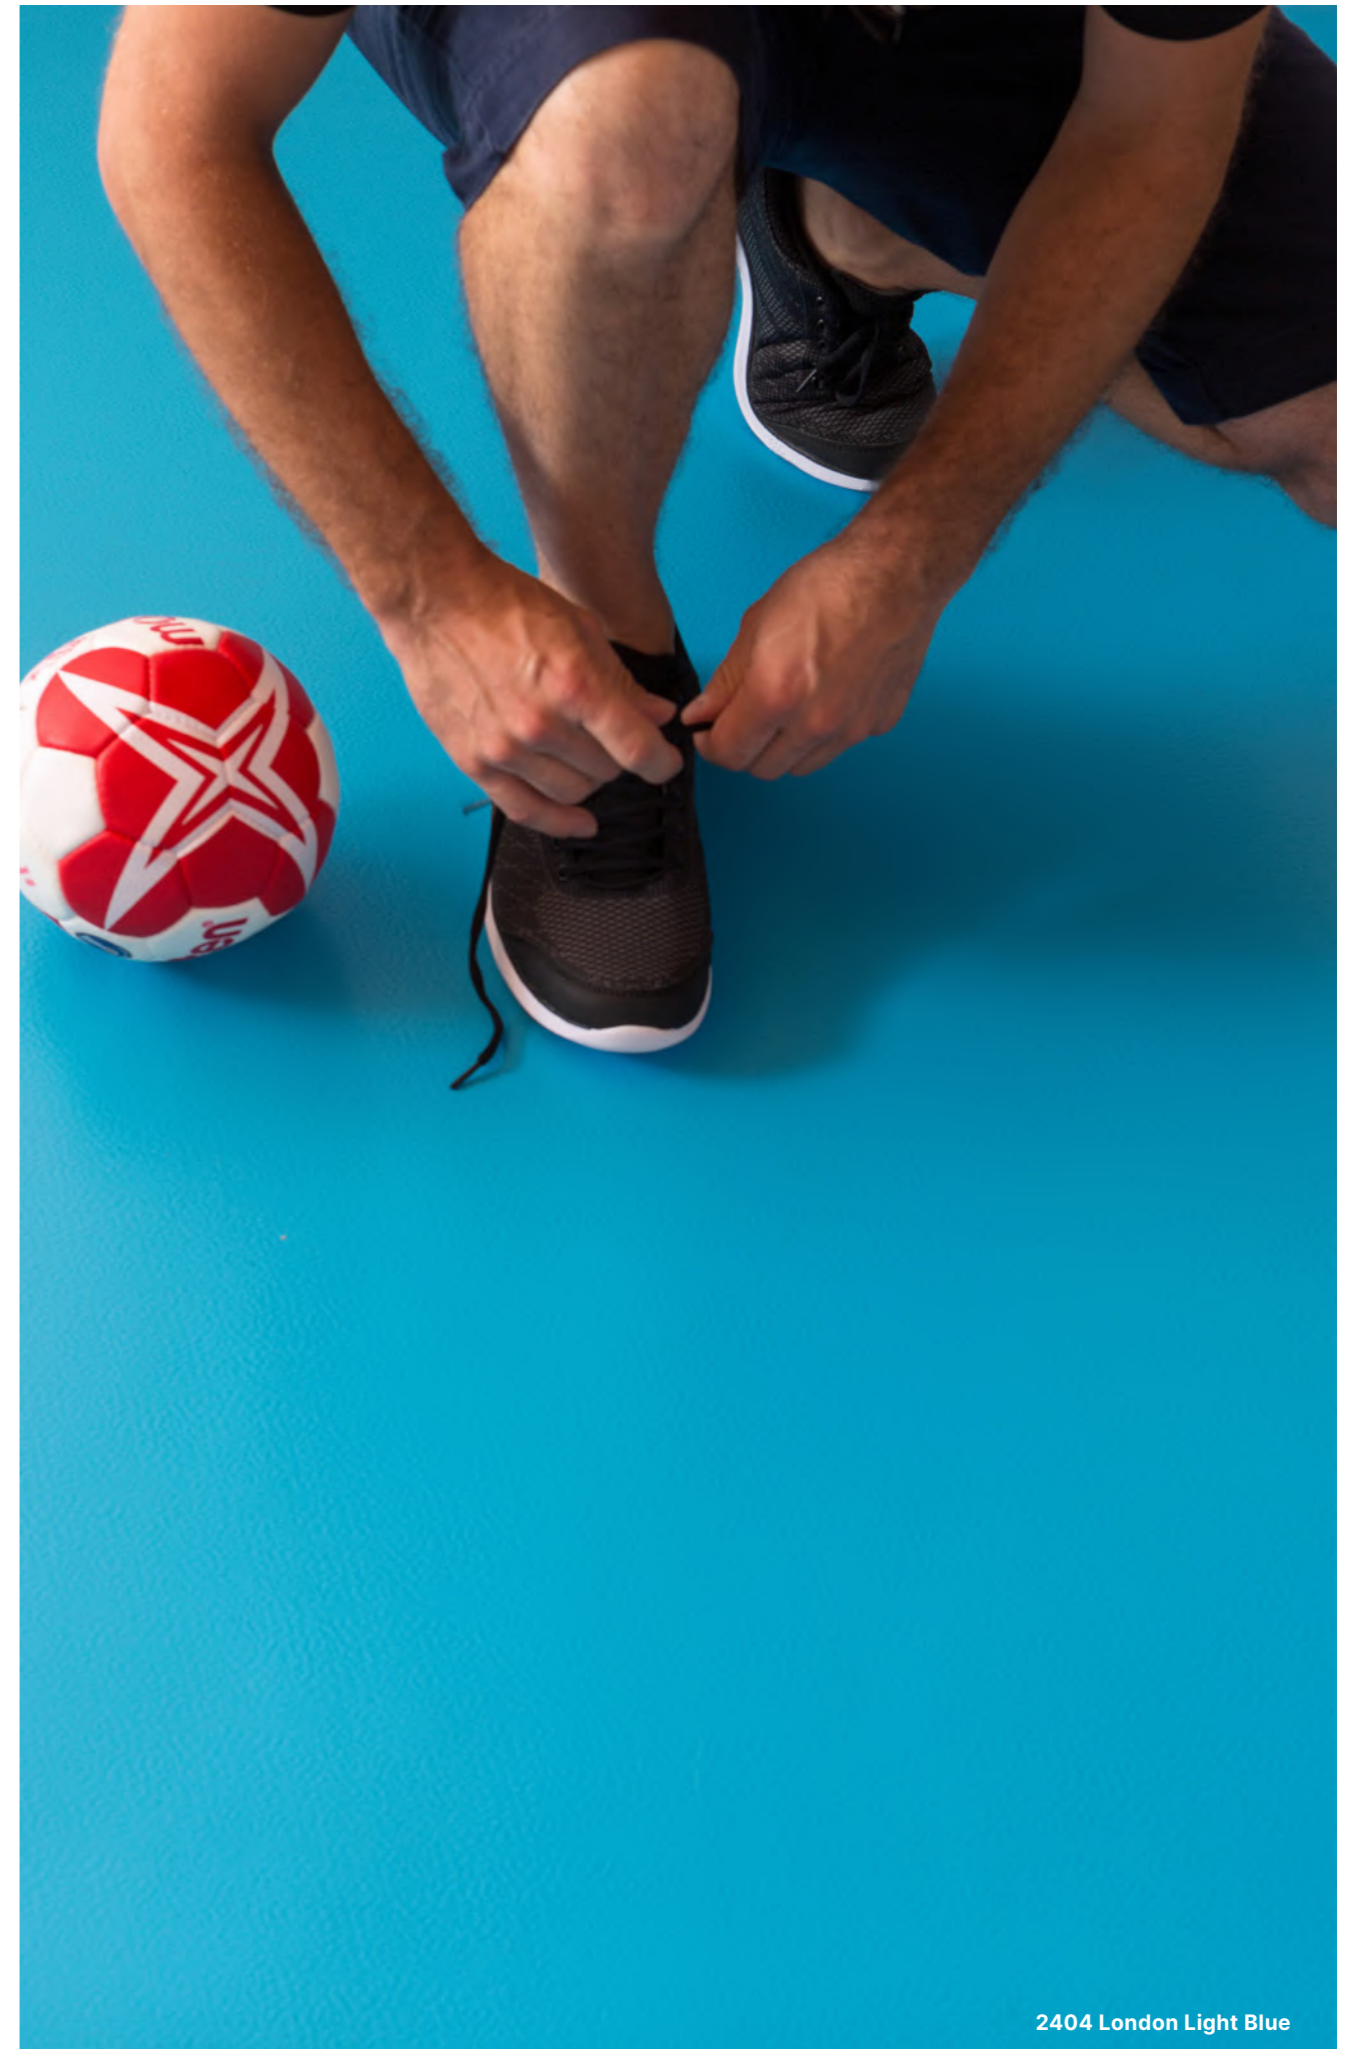**2.0mm** Thickness
   
 Y = Light Reflectance Value (LRV)
   
 Weld Rods see page 234



2404 London Light Blue

# Taraflex® Sport Floors


Innovative services to make your floor unique

UPDATED



Personalise your sports floor using the digital printing process

- ▶ **Choose from collection**  
choose one of our designs from our catalogue (examples shown below)
- ▶ **Change colour**  
recolour the standard design of your choice
- ▶ **Customise**  
create your own design

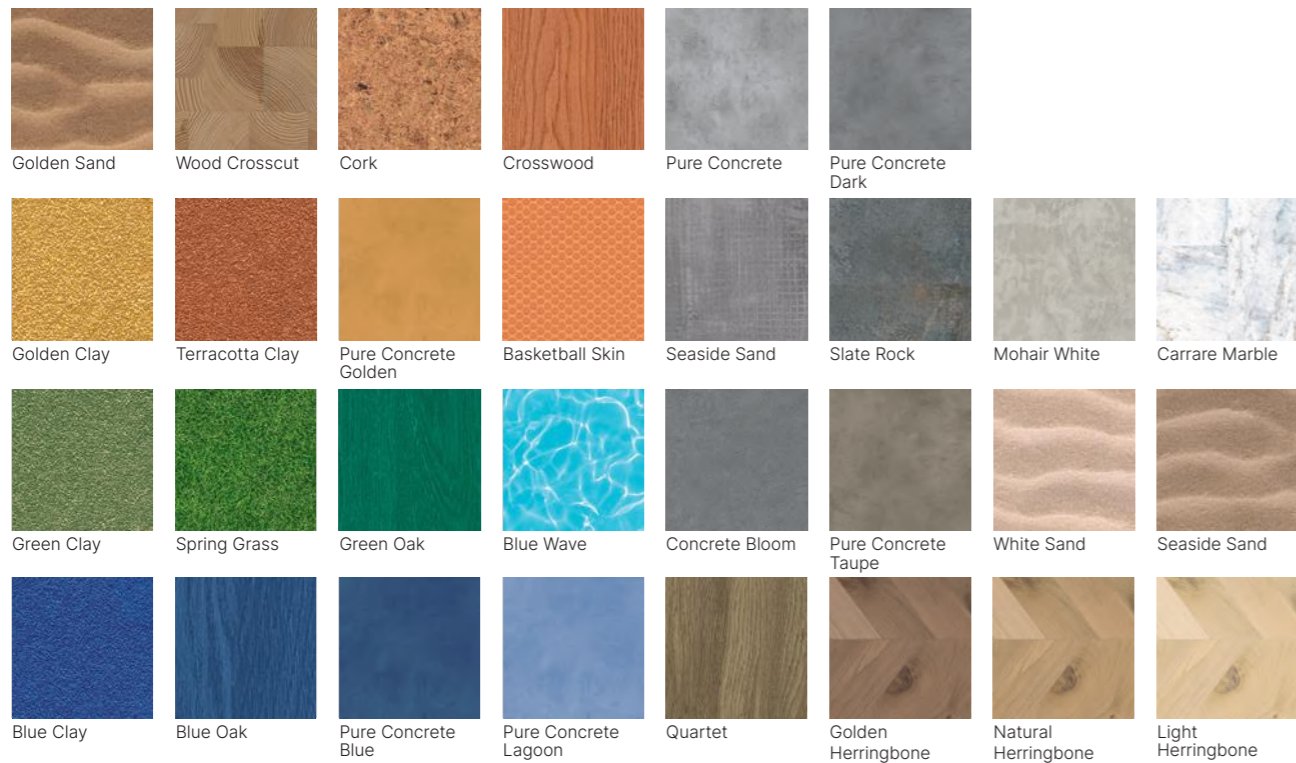

Available with all Taraflex® floors

More designs available, visit our website:  
[mytaraflex.gerflor.com](http://mytaraflex.gerflor.com)


Minimum Order Quantity : 240m<sup>2</sup> / special price / each request subject to individual study\*

\*Contact your local sales representative for more details.



## 3D Court Designer

For a 3D visualisation of your project

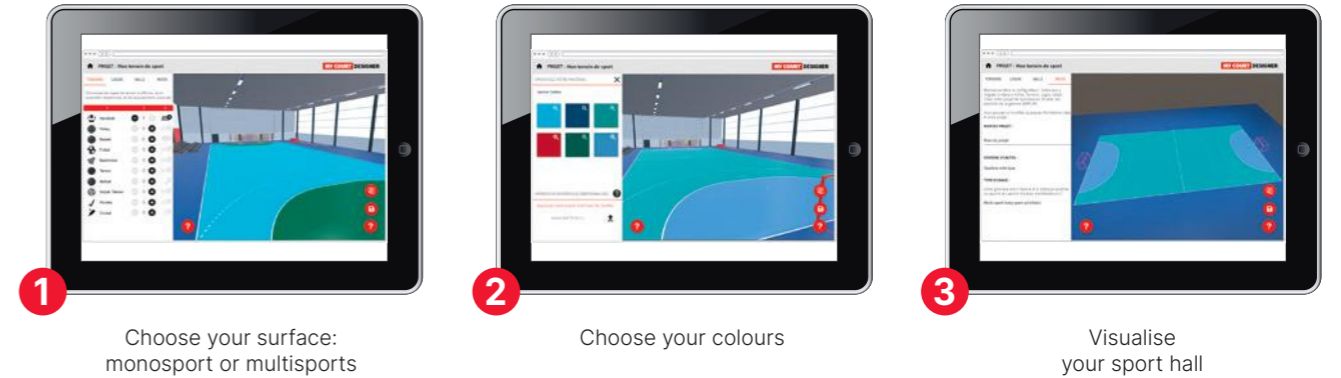

1 Choose your surface:  
monosport or multisports


2 Choose your colours

3 Visualise  
your sport hall

Available on: [courtdesigner.gerflor.com](http://courtdesigner.gerflor.com)

## My Logos

For a stunning result

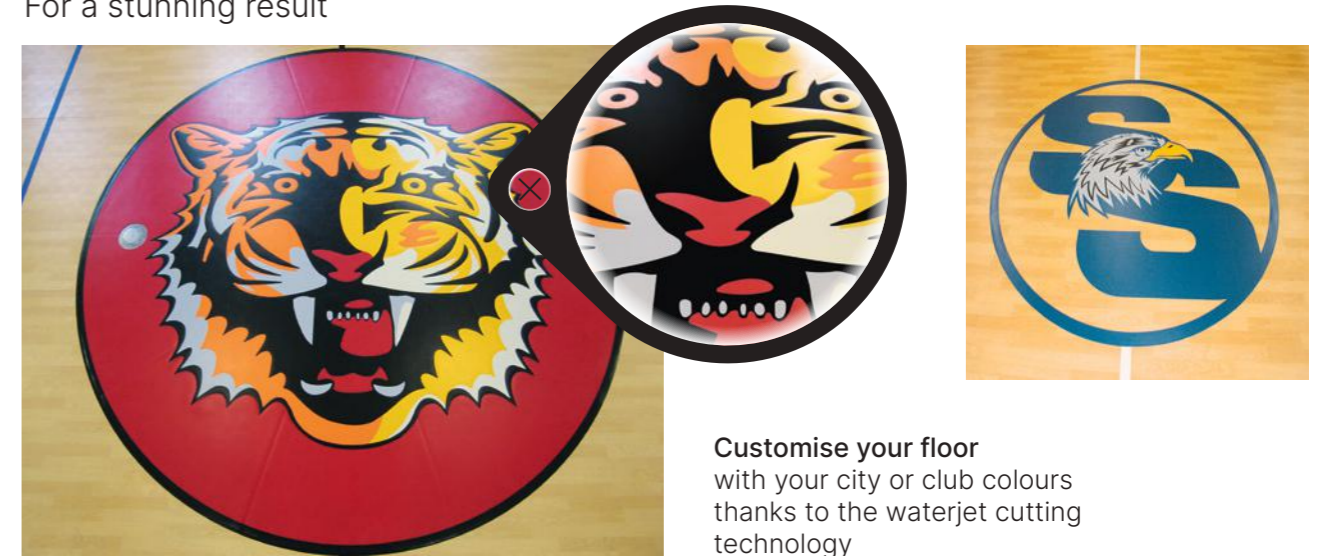


For further information, contact your local Gerflor representative.

## Interior designer

For a realistic view of your environment

- ▶ Download your picture and include the floor
- ▶ Or change the floor colours in selected pictures

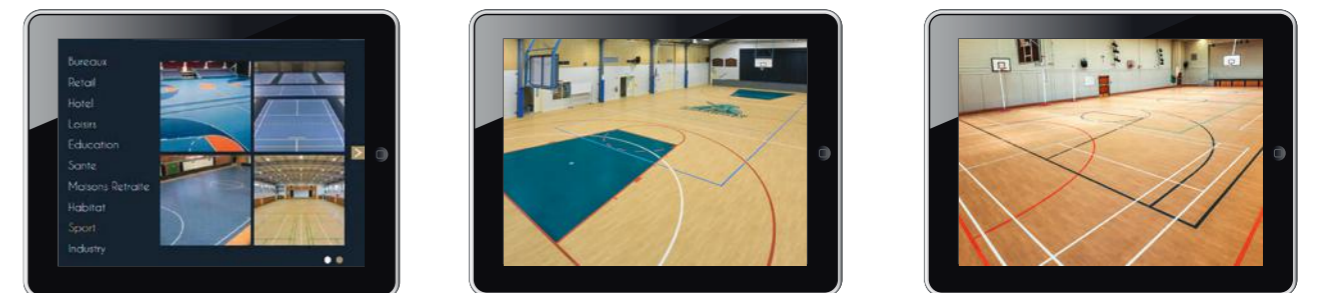

Available on: [interiordesigner.gerflor.com](http://interiordesigner.gerflor.com)



# Modulock

## Beech Hardwood Sports Flooring



Connor Sports® is the US market leader in hardwood sports surfacing. Introducing Modulock - a floating sports floor system with a high stability and durability over time thanks to its quality dried beech, to the 8 battens and locking points per panels and to its Bfls,s1 certification.

Our Modulock floor offers an amazing balance between shock absorption and ball rebound, providing an optimal playability and injury prevention.

The light weight of the panels and the interlocking system enable a fast and easy installation, but also a fast and easy removal, which makes Modulock a perfect solution for events in arenas or repeated installations in sport halls. The system offers enough durability to be also installed as a permanent installation.

Modulock panels provide a perfect assembly quality and finishes that allow an excellent installation. Our wide accessory offer completes Modulock solution with aluminium edges, access ramps, reservations and storage racks.



Connor Sports® Solid Beech

			Modulock
<b>Description</b>			
Finish flooring	-	-	Pre-varnished panels of finger-jointed solid beech
Panel size	-	mm	2380 × 665
Thickness of strips	-	mm	22
Total thickness	EN 428	mm	55
Weight	EN 430	kg/m <sup>2</sup>	17
<b>Sport Properties</b>			
Shock absorption	EN 14808	%	≥ 55 (A4)
Vertical deformation	EN 14809	mm	< 5 (A4)
Sliding coefficient	EN 13036-4	BPN	80-110
Ball bounce	EN 12235	%	≥ 93
<b>Technical Characteristics</b>			
Abrasion resistance	EN ISO 5470-1	g	0.07
Indentation resistance	EN 1516	mm	0.04
Resistance to rolling load	EN 1569	mm	< 0.5
Gloss value	EN ISO 2813	%	< 45
<b>Classification</b>			
Fire resistance	EN 13501-1	class	Bfl-s1
Formaldehydes emission	EN 717	class	E1
<b>CE Marking</b>			
			Fire, Shock Absorption, Sliding Coefficient, Abrasion Resistance, Resistance to rolling load, Resistance to fire, Resistance to wear

### Hardwood systems for professional teams

More than half of the teams in the NBA have purchased a Connor Sports® hardwood system:




# Outdoor Sports Flooring



**Sport Court® Power Game™ Plus** modular outdoor sport surfaces are designed for multi-use and are ideal for athletes participating in sport at any level, either professionally or within education and community settings. Build a new court, renovate an existing space, or set up portable courts for a tournament or event.


Designed to overlay outdated concrete or asphalt surfaces, Sport Court® rapidly transforms them into colourful play surfaces that keep athletes safe, allow for year-round sports activity and eliminates costly annual maintenance.

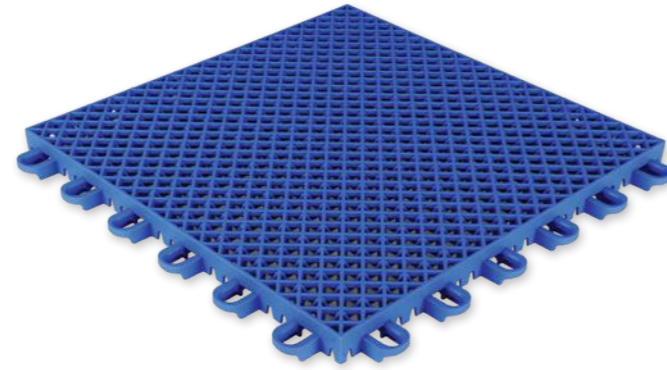

Sport Court® Power Game™ Plus				
Description				
Product	-	-	-	Outdoor Interlocking Tile
Dimensions	-	mm	-	305 × 305
Thickness	-	mm	-	19
Weight	-	g	-	355
Type of installation	-	-	-	Looselay / Possible anchoring
Packaging	-	Box	-	40 tiles per box = 3.72 sqm
Product code	-	-	-	S351
Technical Properties	Method	Unit	Requirements	Results
Friction	EN 13036-4	-	80-110	80-110
Shock absorption	EN 14808	%	≥ 11%	≥ 11%
Vertical rebound	EN 12235	%	≥ 85	100
Permeability	EN 12616	mm/h	≥ 150	> 360
Lock strength	-	N	-	1050
Colour change	EN ISO 20105-A02	-	≥ 3	≥ 3

# Sport Court® Power Game™ Plus Outdoor Sports Flooring



- > Multi-use outdoor flooring, ideal for athletes and the community
- > Keep users safe with the lowest skin abrasion of any outdoor surface
- > Designed to overlay concrete or asphalt
- > New Grid Pattern for better water drainage and faster drying times
- > Enhanced locking system for assured stability and safety

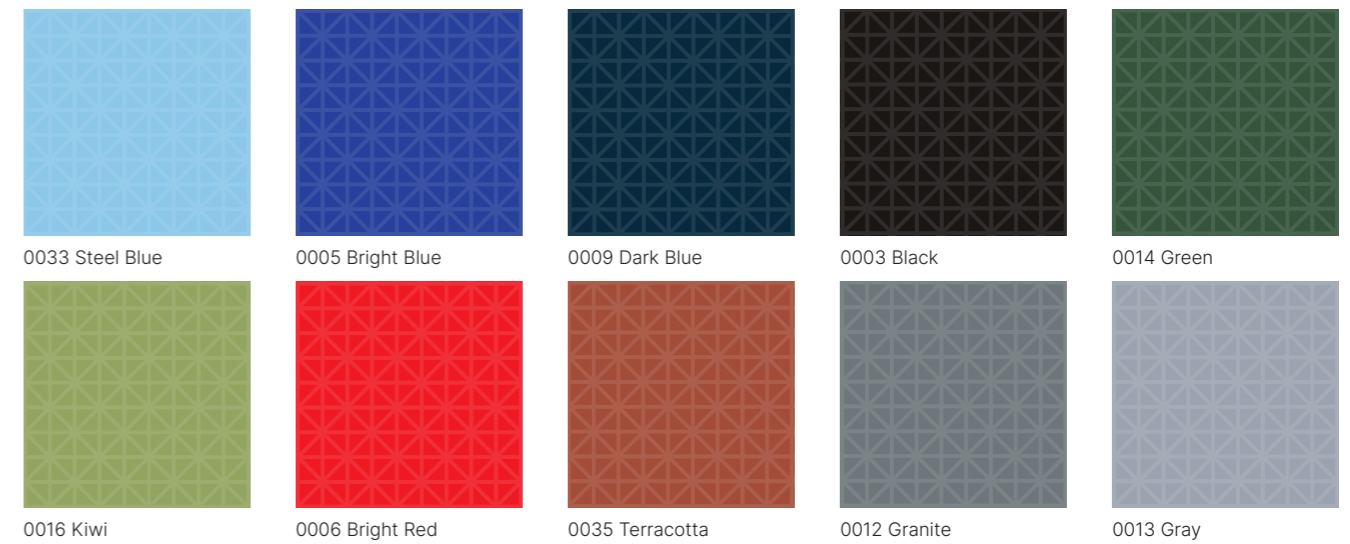

## Product Construction

### Hard courts increase injury risk for athletes

Sport Court® surfaces provide optimal comfort and protect athletes from overuse and stress injuries as well as reduce the likelihood of concussion and stress fractures.

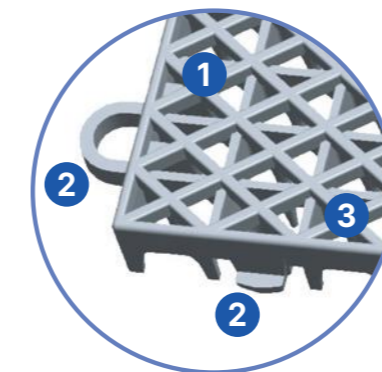
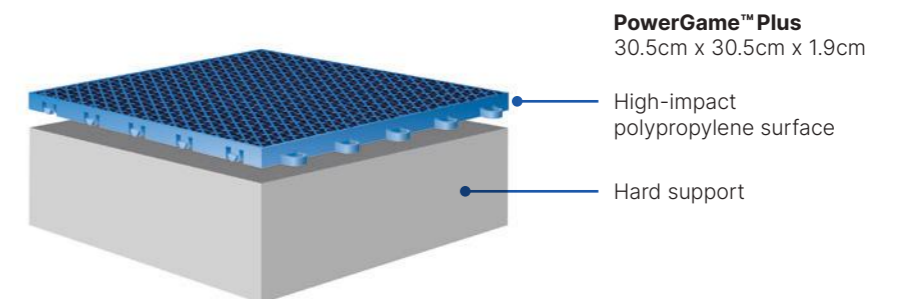


1. **Double-tier** for increased shock absorption
2. **Patented interlocking system** designed to support the movements of athletes and reduce the risk of injury
3. **UV stabilisers** maximise colour-fastness
4. **Backing** designed to promote drainage



# Rubber Gym Flooring

There are flooring types that can resist the beating of the free-weight and weight lifting areas. There are floors that look great. There are floors that are made in formats that make them quick to install, interchangeable and replaceable. There are floors that are easy to maintain. Take a look at our Powershock range – high impact rubber solutions for Fitness, designed to be both functional and hardwearing.

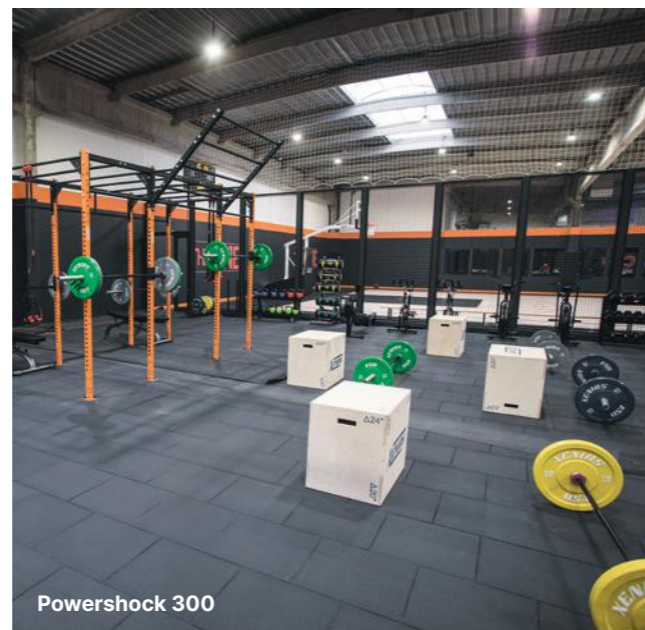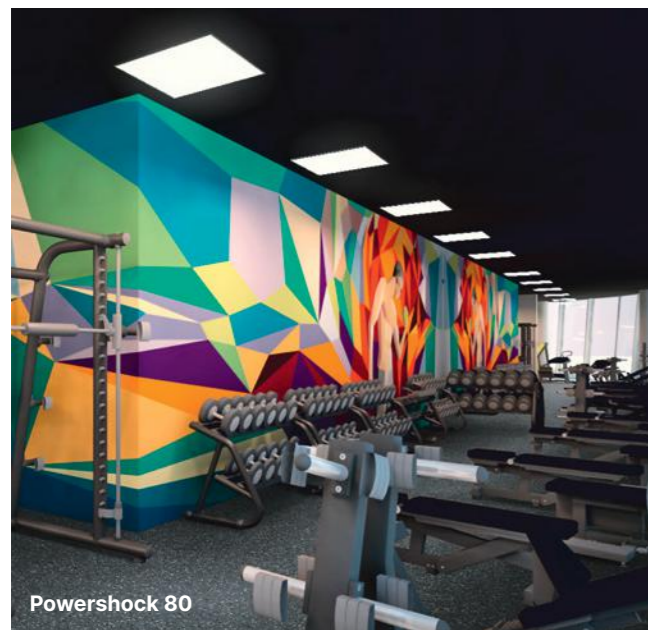


					Powershock	
					80	300
					Cardio & Free-Weight Zone	Crossfit & Heavy-Weight Area
Description						
Size	NF EN ISO 24342	mm	980 × 980		500 × 500	
Thickness	NF EN ISO 24346	mm	8		30	
Weight	NF EN ISO 23997	kg/tile	11.9		6.8	
Classification						
Fire resistance	EN 13501-1	class	Bfl-s1		Cfl-s1	
VOC	ISO 16000-6	class	A+		A+	
Performances						
Dimensional stability	NF EN ISO 23999	%	< 0.3		< 0.1	
Abrasion	EN ISO 5470-1	g	< 0.5		1.5	
Light resistance	EN ISO 20105 - B02	level	4		3	
Indentation resistance	EN 1516	mm	< 0.1		0.12	
Slip resistance in dry conditions	EN 13036-4	unit	80-110		104	
Sound insulation	EN ISO 717/2	dB	13		24	
Hardness shore A	ISO 7619-1	-	> 75		60	

# Powershock Rubber Gym Flooring


- > Shock absorbing
- > Durable
- > Easy to clean and maintain

## Powershock 80 Cardio & Free-Weight Zone


- > Vulcanised rubber is a chemical process through high pressure and temperature enables the sulfur atoms to form links and bridges between long chains of rubber molecules. This increases the overall strength and durability of the rubber
- > Highly resistant to static loads and to dumbbells thanks to the vulcanisation process of this 8mm vulcanized rubber
- > Highly durable
- > Easy to clean and maintain



0002 Black



0001 Dark Grey

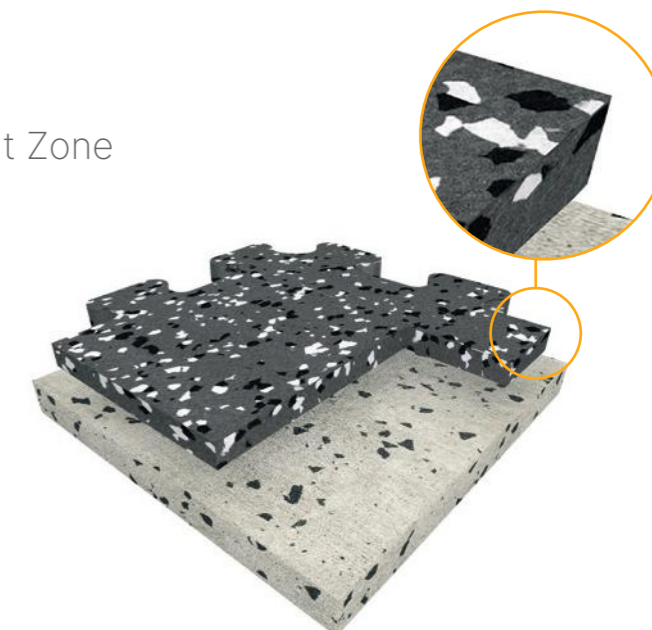


## Powershock 300 Crossfit & Heavy-weight Area

- > Made from vulcanised rubber, a chemical process that cures and combines rubber and sulphur. Through high pressure and temperature the sulphur atoms form links and bridges between long chains of rubber molecules. This increases the overall strength and durability of the rubber
- > 30 mm high impact rubber
- > Tiles with pre-installed connector pins for ease of installation
- > Powershock 300 avoids deep-impact damage while providing outstanding sound deadening, as well as:
  - Shock absorption
  - Sound insulation 26 dB
  - Protection of subfloor



0001 Dark Grey

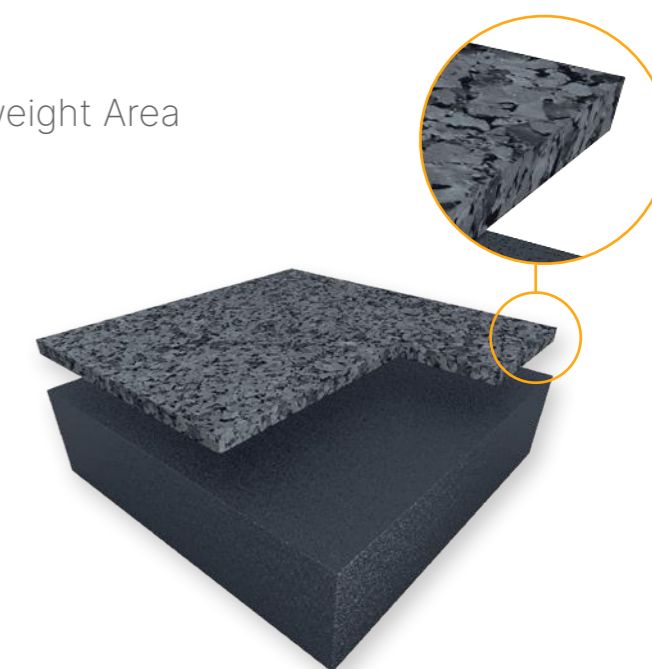

# Sports Undercarriage System

UPDATED

Designed for multi-use leisure activities our low profile area elastic sports floors have no surface irregularities and perform through their anticipated life, consistently achieving EN 14904.

Ideal for renovation and new build projects floors consist of an area elastic undercarriage system made up of an impervious damp proof membrane, 12mm foam base and 12mm plywood topped with a vinyl or linoleum top surface.



Description	Standard	Units	Taraflex®			
			Subflex AE with Taraflex® Surface	Subflex Combisport with Taraflex® Evolution / Multi-Use	AE85 with Taraflex® Surface	Combisport 85 with Taraflex® Evolution / Multi-Use
Surface treatment	-	-	Triple-Action ProtecSol®	Triple-Action ProtecSol®	Triple-Action ProtecSol®	Triple-Action ProtecSol®
Multilayer surface	-	-	D-Max™	D-Max™	D-Max™	D-Max™
Foam Backing	-	-	-	CXP HD	-	CXP HD
Typical total system height	EN 428	mm	33.8mm + (2mm Taraflex® surface)	33.8mm + (6.2mm TX Multi-Use 7.5mm TX Evolution)	Adjustable 55mm upwards (contact us for upper limits)	60mm upwards (contact us for upper limits)
Weight of panels	EN 430	Kg/m²	15.9	17.7	21	21
Length of panels	EN 426	mm	1321	1321	2400	2400
Width of panels	EN 426	mm	549	549	600	600


# Area Elastic Sprung Floor

## Sports Undercarriage System

- > Ideal for low profile / renovation and new build projects
- > EN 14904 complaint: category A3 with <45% force reduction

### Taraflex® Subflex AE

- > Ideal for installations requiring a low profile / renovation projects
- > EN 14904 complaint: category A3 with <40% force reduction
- > For more information call 01625 428922

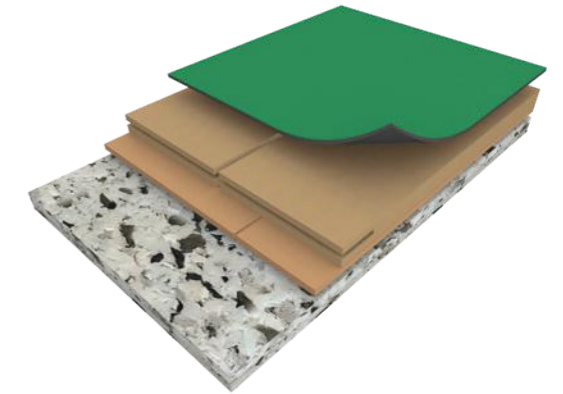

### Taraflex® Subflex Combisport

- > Ideal for installations requiring a low profile / renovation projects
- > For more information call 01625 428922




### Taraflex® AE 85

- > Adjustable height for uneven subfloors
- > EN 14904 complaint: category A4 with <55% force reduction
- > For more information call 01625 428922



### Taraflex® Combisport 85

- > Ideal for installations with uneven subfloors – system adjustable up to 9mm
- > For more information call 01625 428922

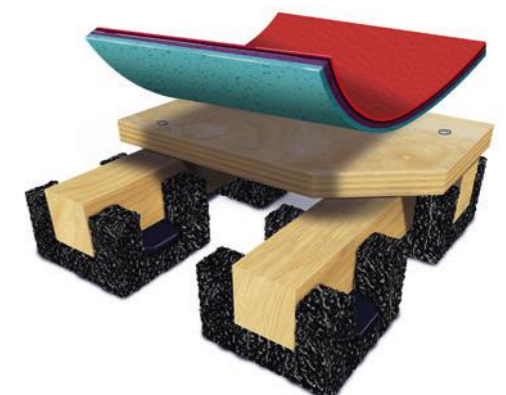

# Creation 70 Luxury Vinyl Tiles & Planks (LVT)

**Creation 70 Clic** is a Luxury Vinyl Tile and Plank system, with clever innovative interlocking technology that makes it fast to install, requires no adhesives and provides a range of inspiring finishes for any interior space.

You can save time and money as it is a fast track, loose lay, clean & dry installation. There is no need to close down the premises as the products can be installed with minimum disruption and over existing floor finishes or imperfect sub floors. It is waterproof as it resists leaks and spillages that can damage wood based products.

Creation 70 Clic is extremely tough and durable and ideal for high traffic environments including retail, hospitality, healthcare, education as well as many other markets.

**Creation 70 Looselay** is a looselay flooring collection adapted for high traffic applications. Fast and easy to install and ready to use out of the box, it is easily removable without leaving messy adhesive residue. Looselay up to 30sqm

**Creation 70 Dryback** range is a popular choice for both public and commercial areas that are designed for high traffic wear including retail, hotels, hospitality, as well as many other market sectors. Creation 70 Dryback range offers inspiring wood, stone and mineral effect designs. Available in 62 designs and in 9 different sizes with many designs having bevelled edges and embossed finishes for added realism.




Creation 70 is available in Clic, Looselay and Dryback variations

1068 Etna Beige



						Creation 70		
						Clic	Looselay	Dryback
<b>Description</b>								
Thickness	EN ISO 24346	mm	6.0	6.0	2.5			
Wear layer thickness	EN ISO 24340	mm	0.70	0.70	0.70			
Weight	EN ISO 23997	g/m <sup>2</sup>	9850	10000	3960 - 4100			
Size	EN ISO 24342	mm	Planks: 214 × 1239 242 × 1461 Tile: 391 × 729	Plank: 229 × 1220 Tiles: 600 × 600 914 × 914	Planks: 184 × 1219, 230 × 1500, 208 × 1243, 228 × 914 Mixed planks: 76/152/228 × 914 Tiles: 610 × 610, 914 × 914, 457 × 914 Mixed tiles: 152/305/457 × 914			
<b>Classification</b>								
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582	EN ISO 10582			
European classification	EN ISO 10874	class	34 -43	34 -43	34 -43			
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1			
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2			
Slip resistance wet	DIN 51130	class	R10	R10	R10			
<b>Performances</b>								
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0	≤ 2.0	≤ 2.0			
Wear group	QB 30	group	T	T	T			
Type binder content	ISO 10582/10581(1)	type	I	I	I			
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15	≤ 0.15	≤ 0.25			
Dimensional stability (measured value)	-	%	≤ 0.5	≤ 0.5	≤ 0.10			
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10			
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25			
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6	≥ 6			
Impact sound insulation	EN ISO 717-2	dB	5	9	4			
Chemical products resistance	EN ISO 26987	-	OK	OK	OK			
Surface treatment	-	-	PUR+ Matt	PUR+ Matt	PUR+ Matt			
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 10	< 10	< 10			
<b>CE Marking</b>								
CE		EN 14041						

Matching decorative strips are available for all Creation 70 collections

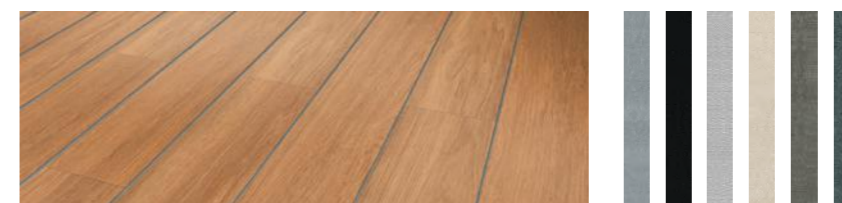


# Creation 70

## Luxury Vinyl Tiles & Planks (LVT)

- > **Creation 70 Clic** interlocking planks that can be laid without adhesive
- > **Creation 70 Looselay** Looselay up to 30sqm, removable installation with tackifier above 30sqm
- > **Creation 70 Dryback** is a glued floorcovering
- > Suitable for high traffic use in public and commercial areas
- > Low maintenance due to PUR+ Matt surface treatment



1051 Muse Smoked Y: 21.3  
DB 208 × 1243mm | CLIC 214 × 1239mm

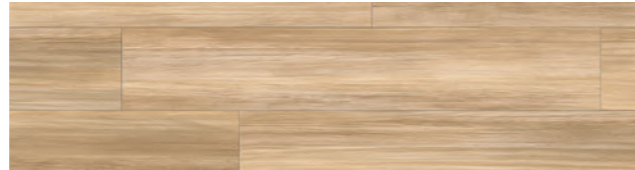

1052 Muse Sand Y: 39.4  
DB 208 × 1243mm | CLIC 214 × 1239mm



0545 Serena Y: 16.7  
DB 208 × 1243mm | CLIC 214 × 1239mm



0577 Albion Y: 21.8  
DB 208 × 1243mm | CLIC 214 × 1239mm



0357 Portobello Y: 25.3  
DB 208 × 1243mm | CLIC 214 × 1239mm | LL 229 × 1220mm



0538 Midwest Y: 38.9  
DB 208 × 1243mm | CLIC 214 × 1239mm | LL 229 × 1220mm



0798 Cervino Oak Nature Y: 28.3  
DB 230 × 1500mm | CLIC 242 × 1461mm



0797 Cervino Oak Beige Y: 40.1  
DB 230 × 1500mm | CLIC 242 × 1461mm



0358 Moon Island Y: 24.8  
DB 208 × 1243mm | CLIC 214 × 1239mm | LL 229 × 1220mm



0360 Deep Forest Y: 15.8  
DB 208 × 1243mm | CLIC 214 × 1239mm



0800 Toasted Wood Roadster Y: 13.6  
DB 230 × 1500mm | CLIC 242 × 1461mm



1053 Toasted Wood Ash Y: 10.6  
DB 230 × 1500mm | CLIC 242 × 1461mm

**0.7mm** Wear Layer | **T** Wear Group | **R10** Slip Resistant

**PUR+ Matt** | **DB** Creation 70 Dryback | **CLIC** Creation 70 Clic | **LL** Creation 70 Looselay | **Y** = Light Reflectance Value (LRV) | **▷** = Min order quantity 800m<sup>2</sup> Lead time applies



1051 Muse Smoked

# Creation 70

## Luxury Vinyl Tiles & Planks (LVT)


- > **Creation 70 Clic** interlocking planks that can be laid without adhesive
- > **Creation 70 Looselay** Looselay up to 30sqm, removable installation with tackifier above 30sqm
- > **Creation 70 Dryback** is a glued floorcovering
- > Suitable for high traffic use in public and commercial areas
- > Low maintenance due to Polyurethane (PUR+) surface treatment



0799 Toasted Wood Cafe Y: 8.4  
DB 230 × 1500mm | CLIC 242 × 1461mm




0359 Wild Oak Y: 26.8  
DB 208 × 1243mm | CLIC 214 × 1239mm

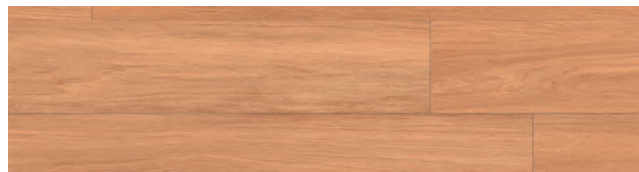

1054 Onka Honey Y: 26.6  
DB 230 × 1500mm | CLIC 242 × 1461mm | LL 229 × 1220mm



0329 Limed Oak Y: 42.0  
DB 208 × 1243mm

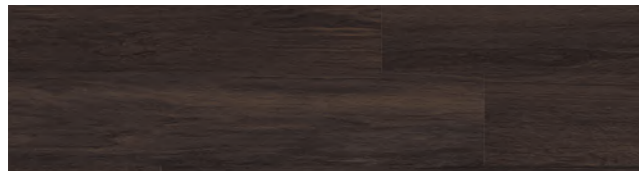


1057 Onka Coffee Y: 7.0  
DB 230 × 1500mm | CLIC 242 × 1461mm



1056 Onka Pearl Y: 32.9  
DB 230 × 1500mm | CLIC 242 × 1461mm




1049 Grace Bay Cream Y: 49.1  
DB 208 × 1243mm

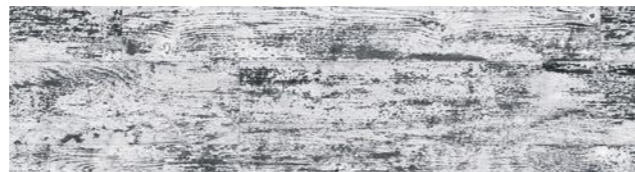

1050 Grace Bay Black Y: 32.0  
DB 208 × 1243mm | CLIC 214 × 1239mm



0356 Denim Wood Y: 41.4  
DB 208 × 1243mm | LL 229 × 1220mm

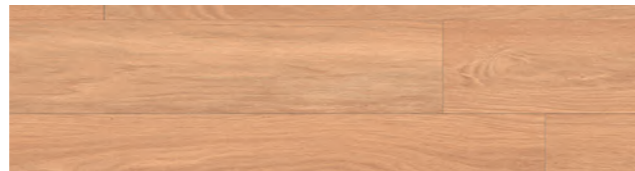

1055 Onka Natural Y: 31.1  
DB 230 × 1500mm | CLIC 242 × 1461mm



1074 Diesel Burnt Y: 8.1  
DB 230 × 1500mm | ▷ LL 229 × 1220mm



1075 Diesel Nala Y: 16.7  
DB 230 × 1500mm | LL 229 × 1220mm

**0.7mm** Wear Layer | **T** Wear Group | **R10** Slip Resistant

**PUR+ Matt** | **DB** Creation 70 Dryback | **CLIC** Creation 70 Clic | **LL** Creation 70 Looselay | **Y** = Light Reflectance Value (LRV) | **▷** = Min order quantity 800m<sup>2</sup> Lead time applies



0799 Toasted Wood Cafe

# Creation 70

## Luxury Vinyl Tiles & Planks (LVT)


- > **Creation 70 Clic** interlocking planks that can be laid without adhesive
- > **Creation 70 Looselay** Looselay up to 30sqm, removable installation with tackifier above 30sqm
- > **Creation 70 Dryback** is a glued floorcovering
- > Suitable for high traffic use in public and commercial areas
- > Low maintenance due to Polyurethane (PUR+) surface treatment




0556 Clifton Y: 23.2  
DB Mix 152 × 914 mm / 76 × 914 mm / 228 × 914 mm



1192 Clifton Grey Y: 45.7  
DB 208 × 1243mm

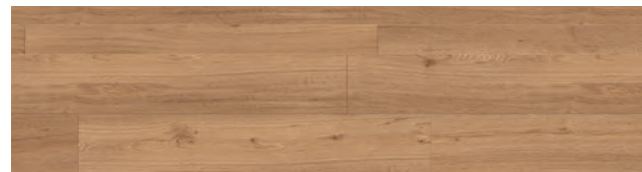


1191 Clifton Chestnut Y: 25.2  
DB Mix 152 × 914 mm / 76 × 914 mm / 228 × 914 mm

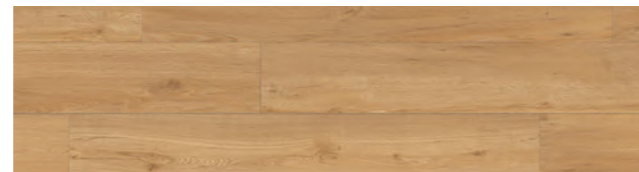

1190 Clifton Honey Y: 24.2  
DB 208 × 1243mm




0324 Silversands Y: 33.1  
DB 208 × 1243mm

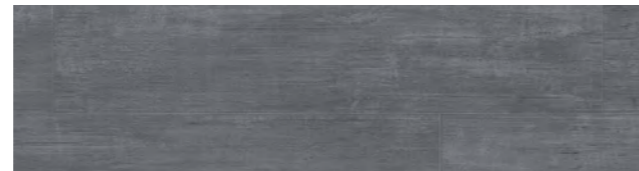

0561 Carassi Y: 21.7  
DB 228 × 914mm




0535 Douglas Y: 29.1  
DB 208 × 1243mm

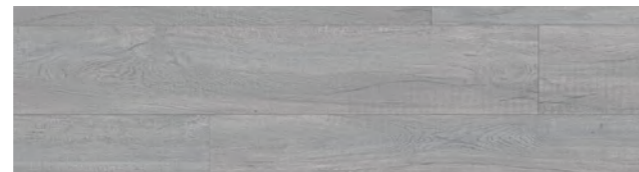

1187 Cervino Oak Cold Grey Y: 33.8  
DB 230 × 1500mm



1186 Cervino Oak Honey Clear Y: 27.6  
DB 230 × 1500mm

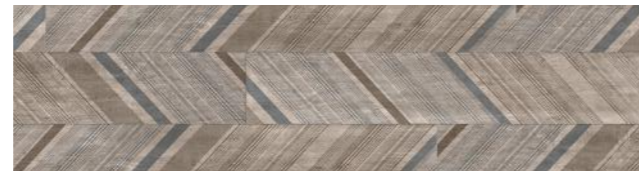


0807 Regimental Picadilly Y: 20.6  
DB 184 × 1219mm



0803 Solid Glam Picadilly Y: 27.8  
DB 184 × 1219mm

**0.7mm** Wear Layer | **T** Wear Group | **R10** Slip Resistant

**PUR+ Matt** | **DB** Creation 70 Dryback | **CLIC** Creation 70 Clic | **LL** Creation 70 Looselay | **Y** = Light Reflectance Value (LRV)

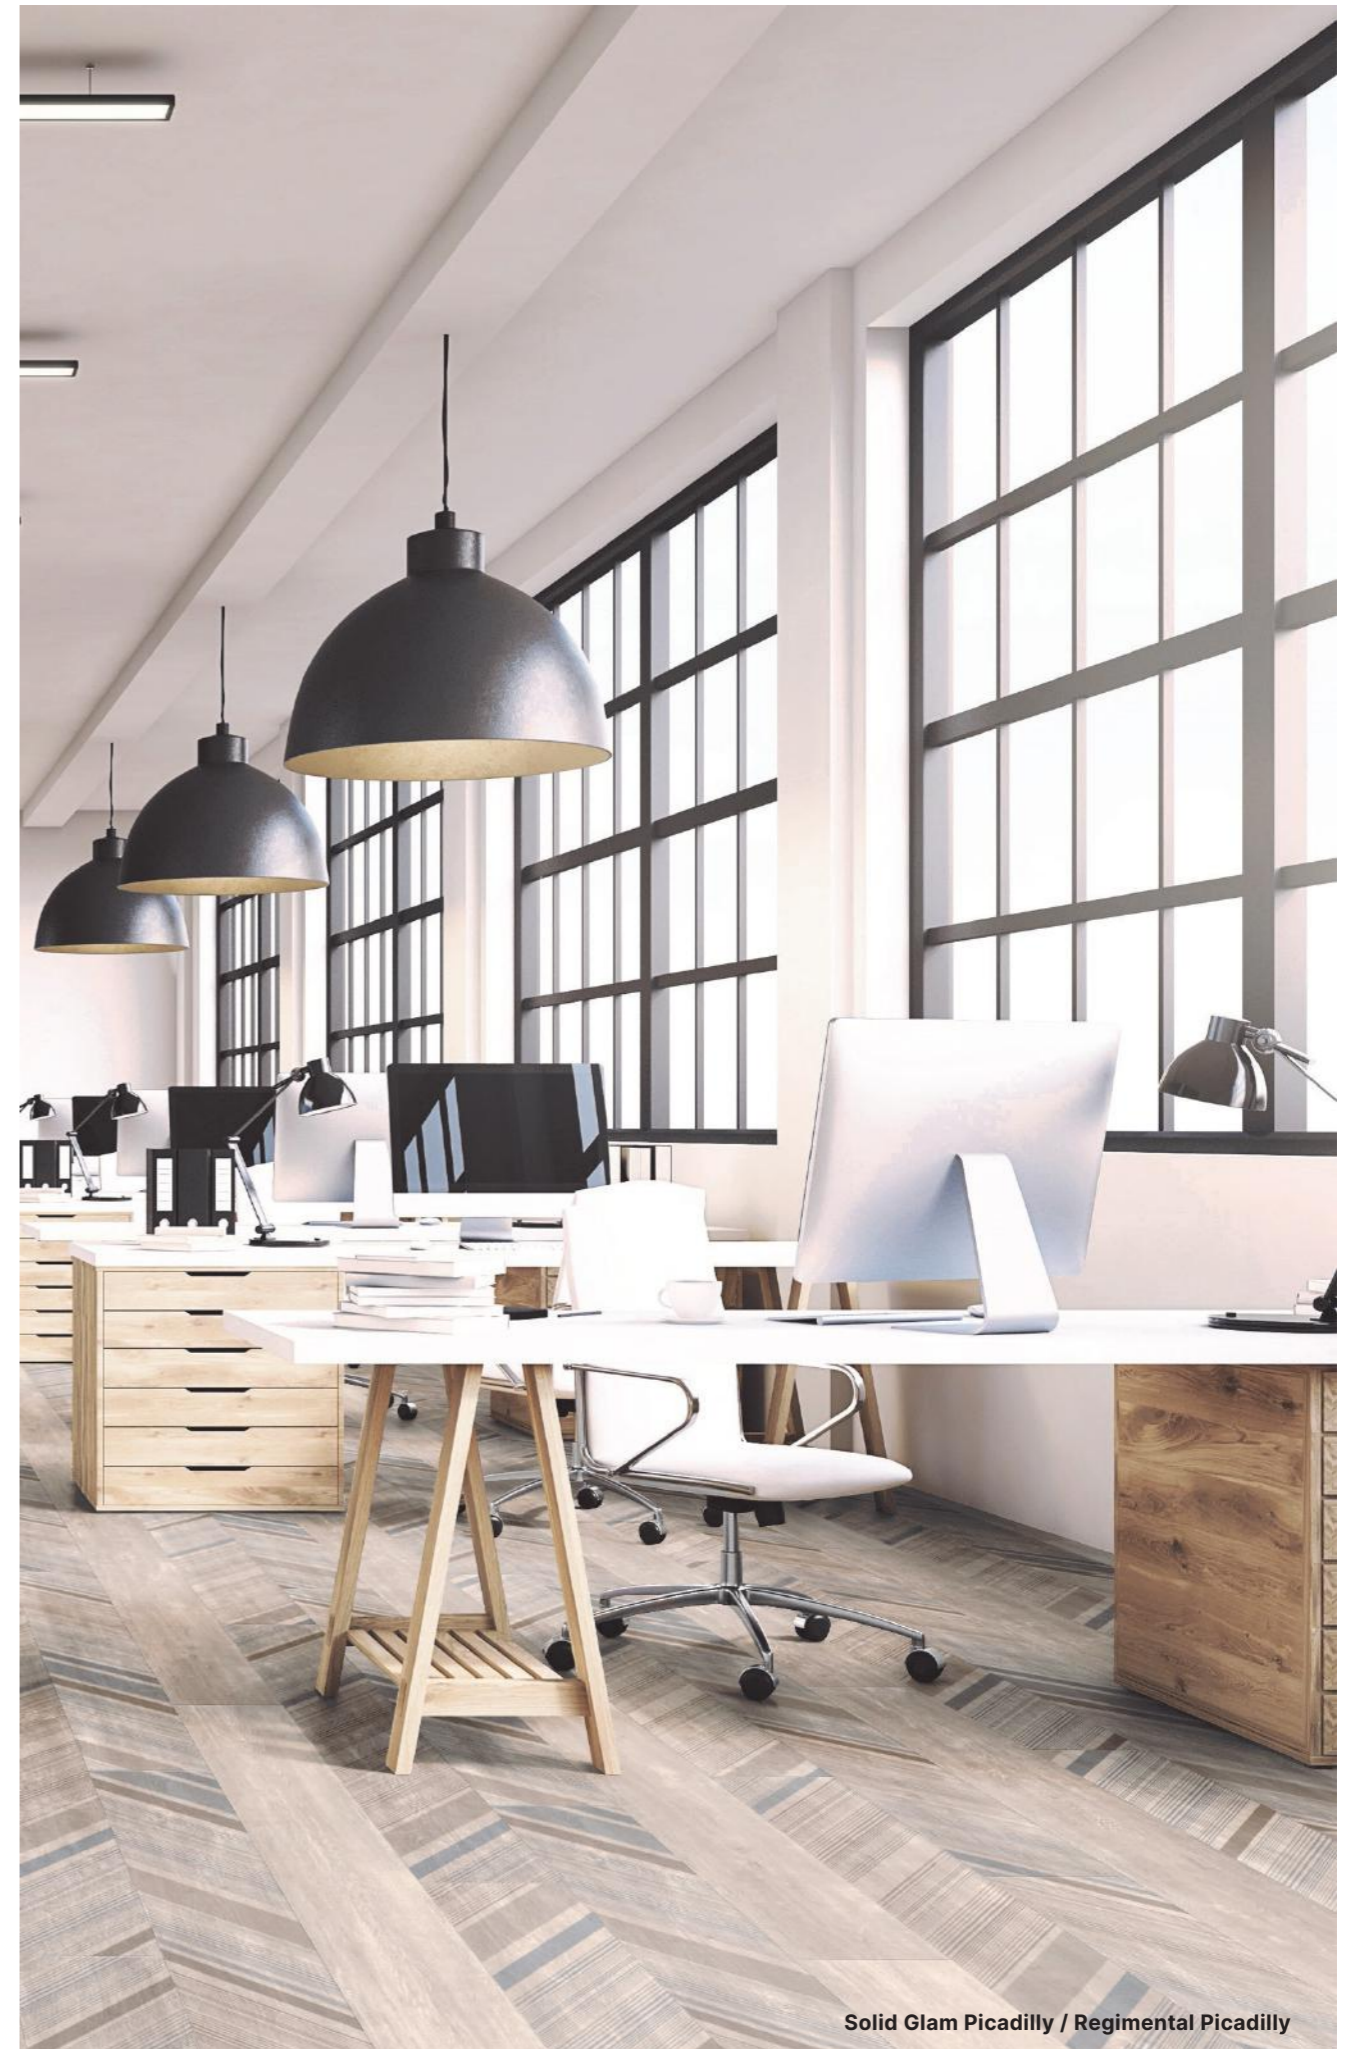

Solid Glam Picadilly / Regimental Picadilly



# Creation 70

## Luxury Vinyl Tiles & Planks (LVT)


- > **Creation 70 Clic** interlocking planks that can be laid without adhesive
- > **Creation 70 Looselay** Looselay up to 30sqm, removable installation with tackifier above 30sqm
- > **Creation 70 Dryback** is a glued floorcovering
- > Suitable for high traffic use in public and commercial areas
- > Low maintenance due to Polyurethane (PUR+) surface treatment




1061 Pure Concrete Medium  
DB 914 × 914mm  
CLIC 391 × 729mm  
LL 914 × 914mm  
Y: 28.4



1063 Pure Concrete Beige  
DB 914 × 914mm  
CLIC 391 × 729mm  
Y: 34.3




1060 Pure Concrete Light  
DB 914 × 914mm  
CLIC 391 × 729mm  
LL 914 × 914mm  
Y: 39.1



1062 Pure Concrete Dark  
DB 914 × 914mm  
CLIC 391 × 729mm  
LL 914 × 914mm  
Y: 11.1



1068 Etna Beige  
DB 457 × 914mm  
CLIC 391 × 729mm  
Y: 36.6



0089 Oxyd Iron  
DB 457 × 914mm  
CLIC 391 × 729mm  
Y: 9.4



1081 Gentleman Indigo  
DB 610 × 610mm  
▷ LL 600 × 600mm  
Y: 16.3



1080 Gentleman Garance  
DB 610 × 610mm  
▷ LL 600 × 600mm  
Y: 13.7



1082 Gentleman Peppermint  
DB 610 × 610mm  
▷ LL 600 × 600mm  
Y: 16.3



1083 Gentleman Taupe  
DB 228 × 914mm  
▷ LL 229 × 1220mm  
Y: 21.2




1076 Gentleman Tweed  
DB 228 × 914mm  
Y: 16.2



1058 Gentleman Grey  
DB 610 × 610mm  
CLIC 391 × 729mm  
LL 600 × 600mm  
Y: 12.7



1069 Etna Dark  
DB 457 × 914mm  
CLIC 391 × 729mm  
Y: 12.9



0088 Oxyd Pure  
DB 457 × 914mm  
CLIC 391 × 729mm  
Y: 17.2

0.7mm

Wear Layer

T Wear Group

R10 Slip Resistant

PUR+ Matt

DB  
Creation 70 Dryback

CLIC  
Creation 70 Clic

LL  
Creation 70 Looselay

Y = Light Reflectance Value (LRV)

▷ = Min order quantity 800m<sup>2</sup> Lead time applies



1061 Pure Concrete Medium / 1062 Pure Concrete Dark

# Creation 70

## Luxury Vinyl Tiles & Planks (LVT)

- > **Creation 70 Clic** interlocking planks that can be laid without adhesive
- > **Creation 70 Looselay** Looselay up to 30sqm, removable installation with tackifier above 30sqm
- > **Creation 70 Dryback** is a glued floorcovering
- > Suitable for high traffic use in public and commercial areas
- > Low maintenance due to Polyurethane (PUR+) surface treatment




1077 Tatami Savane  
DB 610 × 610mm  
Y: 31.6



1059 Secret Garden  
White  
DB 457 × 914mm  
CLIC 391 × 729mm  
Y: 50.2



0087 Dock Taupe  
DB 457 × 914mm  
CLIC 391 × 729mm  
▷ LL 914 × 914mm  
Y: 20.9



0085 Dock Grey  
DB 457 × 914mm  
CLIC 391 × 729mm  
LL 914 × 914mm  
Y: 20.1



1078 Tatami Raffia  
DB 610 × 610mm  
▷ LL 600 × 600mm  
Y: 24.4




1079 Tatami Smoked  
DB 610 × 610mm  
▷ LL 600 × 600mm  
Y: 12.2




1064 Prado Green  
DB 457 × 914mm  
CLIC 391 × 729mm  
Y: 12.1



1065 Prado Terracotta  
DB 457 × 914mm  
CLIC 391 × 729mm  
Y: 23.1



0531 Halifax  
DB 610 × 610mm  
Y: 16.7




0522 East Village  
DB 610 × 610mm  
Y: 22.0



1188 Travertino Beige  
DB 228 × 914mm  
Y: 46.9



1189 Travertino Grey  
DB 228 × 914mm  
Y: 36.7



1067 Terrazzo Nature  
DB 914 × 914mm  
Y: 64.4



1066 Terrazzo Ocre  
DB 914 × 914mm  
Y: 54.5

0.7mm

Wear Layer

T Wear Group

R10 Slip Resistant

PUR+ Matt

DB  
Creation 70 Dryback

CLIC  
Creation 70 Clic

LL  
Creation 70 Looselay

Y = Light Reflectance Value (LRV)

▷ = Min order quantity 800m<sup>2</sup> Lead time applies



1188 Travertino Beige

# Creation 55 Luxury Vinyl Tiles & Planks (LVT)

**Creation 55 Solid Clic** is a luxury, vinyl plank flooring with an innovative, built-in, vertical interlocking system that clicks together for quick and straightforward installation without adhesive or specialist tools and fitting skills.

It installs cleanly without creating dust and noise or damage to the surface beneath and can be walked on immediately. Individual planks can also be lifted for easy replacement.

Suitable for medium traffic areas and domestic use, it has a ProtecShield™ surface coating for extra resilience and easy cleaning. The authentic wood designs with enhanced graining are complementary to wide ranging décor schemes.

**Creation 55 Dryback** is available in wood and mineral effect tiles and planks that can enhance any interior décor. A popular choice for medium traffic areas in the retail, office, administration, leisure, hotel, hospitality markets as well as suitable for domestic use.



Creation 55 is available in Solid Clic, Dryback, Looselay, Looselay Acoustic and Rigid Acoustic variations

0347 Ballerina

## Creation 55 Looselay / Looselay Acoustic

are looselay flooring collections adapted for medium traffic applications. Fast and easy to install and ready to use out of the box, they are easily removable without leaving messy adhesive residue. Looselay up to 30sqm. Creation 55 Looselay Acoustic incorporates a backing with an acoustic core which delivers up to 19dB impact sound reduction.

**Creation 55 Rigid Acoustic** is a decorative interlocking floorcovering assembled with an angle to angle locking system to provide robust and easy installation. Available as a tile or plank Creation 55 Rigid Acoustic is made up of a 0.55 mm thick transparent wear layer, a high definition printing film to provide an hyper realistic design, a Full Rigid Board to provide high performances for heavy renovations and an integrated underlayer 100% recyclable which provides a 19dB sound reduction. The product is 100% recyclable and made with up to 35% of recycled content. It is 100% compliant with REACH.



Creation 55						
	Solid Clic	Rigid Acoustic	Looselay	Looselay Acoustic	Dryback	

Description							
Thickness	EN ISO 24346	mm	5.0	6.0	4.5	5.5	2.5
Wear layer thickness	EN ISO 24340	mm	0.55	0.55	0.55	0.55	0.55
Weight	EN ISO 23997	g/m <sup>2</sup>	7781	9480	7500	7600	3850
Size	EN ISO 24342	mm	Planks: 212 × 1239 240 × 1461 Tile: 389 × 729	Planks: 125 × 750 177 × 1219 225 × 1524 Tile: 457 × 914	Plank: 229 × 1220 Tiles: 500 × 500 600 × 600	Plank: 229 × 1220 Tile: 500 × 500	Planks: 184 × 1219 230 × 1500 152 × 762 Tiles: 457 × 914 610 × 610 914 × 914
Classification							
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582	EN ISO 10582	EN 651	EN ISO 10582
European classification	EN ISO 10874	class	33 - 42	33 - 42	33 - 42	33 - 42	33 - 42
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2	< 2
Slip resistance wet	DIN 51130	class	R10	R10	R10	R10	R10
Performances							
Wear resistance	EN 660.2	mm <sup>3</sup>	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
Wear group	QB 30	group	T	T	T	T	T
Type binder content	ISO 10582	type	I	I	I	i	I
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.25
Dimensional stability (measured value)	-	%	≤ 0.05	≤ 0.10	≤ 0.05	≤ 0.05	≤ 0.10
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.05	≤ 0.05	≤ 0.20	≤ 0.10
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Impact sound insulation	EN ISO 717-2	dB	4	19	7	19	4
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	OK	OK
Surface treatment	-	-	ProtecShield™	ProtecShield™	ProtecShield™	ProtecShield™	ProtecShield™
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 10	< 10	< 10	< 10	< 10
CE Marking							
CE	EN 14041						

▷ = Min order quantity 800m<sup>2</sup>  
Lead time applies

Matching decorative strips are available  
for all Creation 55 collections



# Creation 55

## Luxury Vinyl Tiles & Planks (LVT)

- > **Creation 55 Dryback** is a glued floorcovering
- > **Creation 55 Solid Clic** interlocking planks that can be laid without adhesive
- > **Creation 55 Rigid Acoustic** "Full rigid board" technology with an integrated acoustic underlay
- > **Creation 55 Looselay / Looselay Acoustic** Looselay up to 30sqm, removable installation with tackifier above 30sqm. Acoustic version delivers 19dB impact sound reduction
- > Suitable for medium traffic areas
- > Low maintenance due to Polyurethane (ProtecShield™) surface treatment



0465 Cambridge Y: 39.8  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm



0849 Cedar Pure Y: 39.8  
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm  
RIGID AC 225 × 1524mm




0796 Swiss Oak Golden Y: 25.8  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm




0441 Honey Oak Y: 27.7  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm



0504 Twist Y: 38.9  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm



0846 Swiss Oak Pearl Y: 36.1  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm

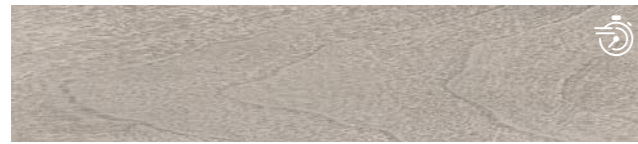

0853 Bostonian Oak Beige Y: 36.7  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm | LL 229 × 1220mm



0871 Bostonian Oak Y: 26.4  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm | LL 229 × 1220mm



0850 Cedar Brown Y: 21.3  
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm  
RIGID AC 225 × 1524mm



0851 Bostonian Oak Honey Y: 29.8  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm




0870 Quartet Honey Y: 28.2  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm | LL 229 × 1220mm



0347 Ballerina Y: 28.4  
DB 184 × 1219mm, 152 × 762mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm, 125 × 750mm | LL 229 × 1220mm  
LL AC 229 × 1220mm

ProtecShield™ | **0.55mm** Wear Layer | T Wear Group | **R10** Slip Resistant | Y = Light Reflectance Value (LRV) | Stocked for quick delivery see page 4

**DB** Creation 55 Dryback | **SOLID CLIC** Creation 55 Solid Clic | **RIGID AC** Creation 55 Rigid Acoustic | **LL** Creation 55 Looselay | **LL AC** Creation 55 Looselay Acoustic  
Min order quantity 800m<sup>2</sup>  
Lead time applies

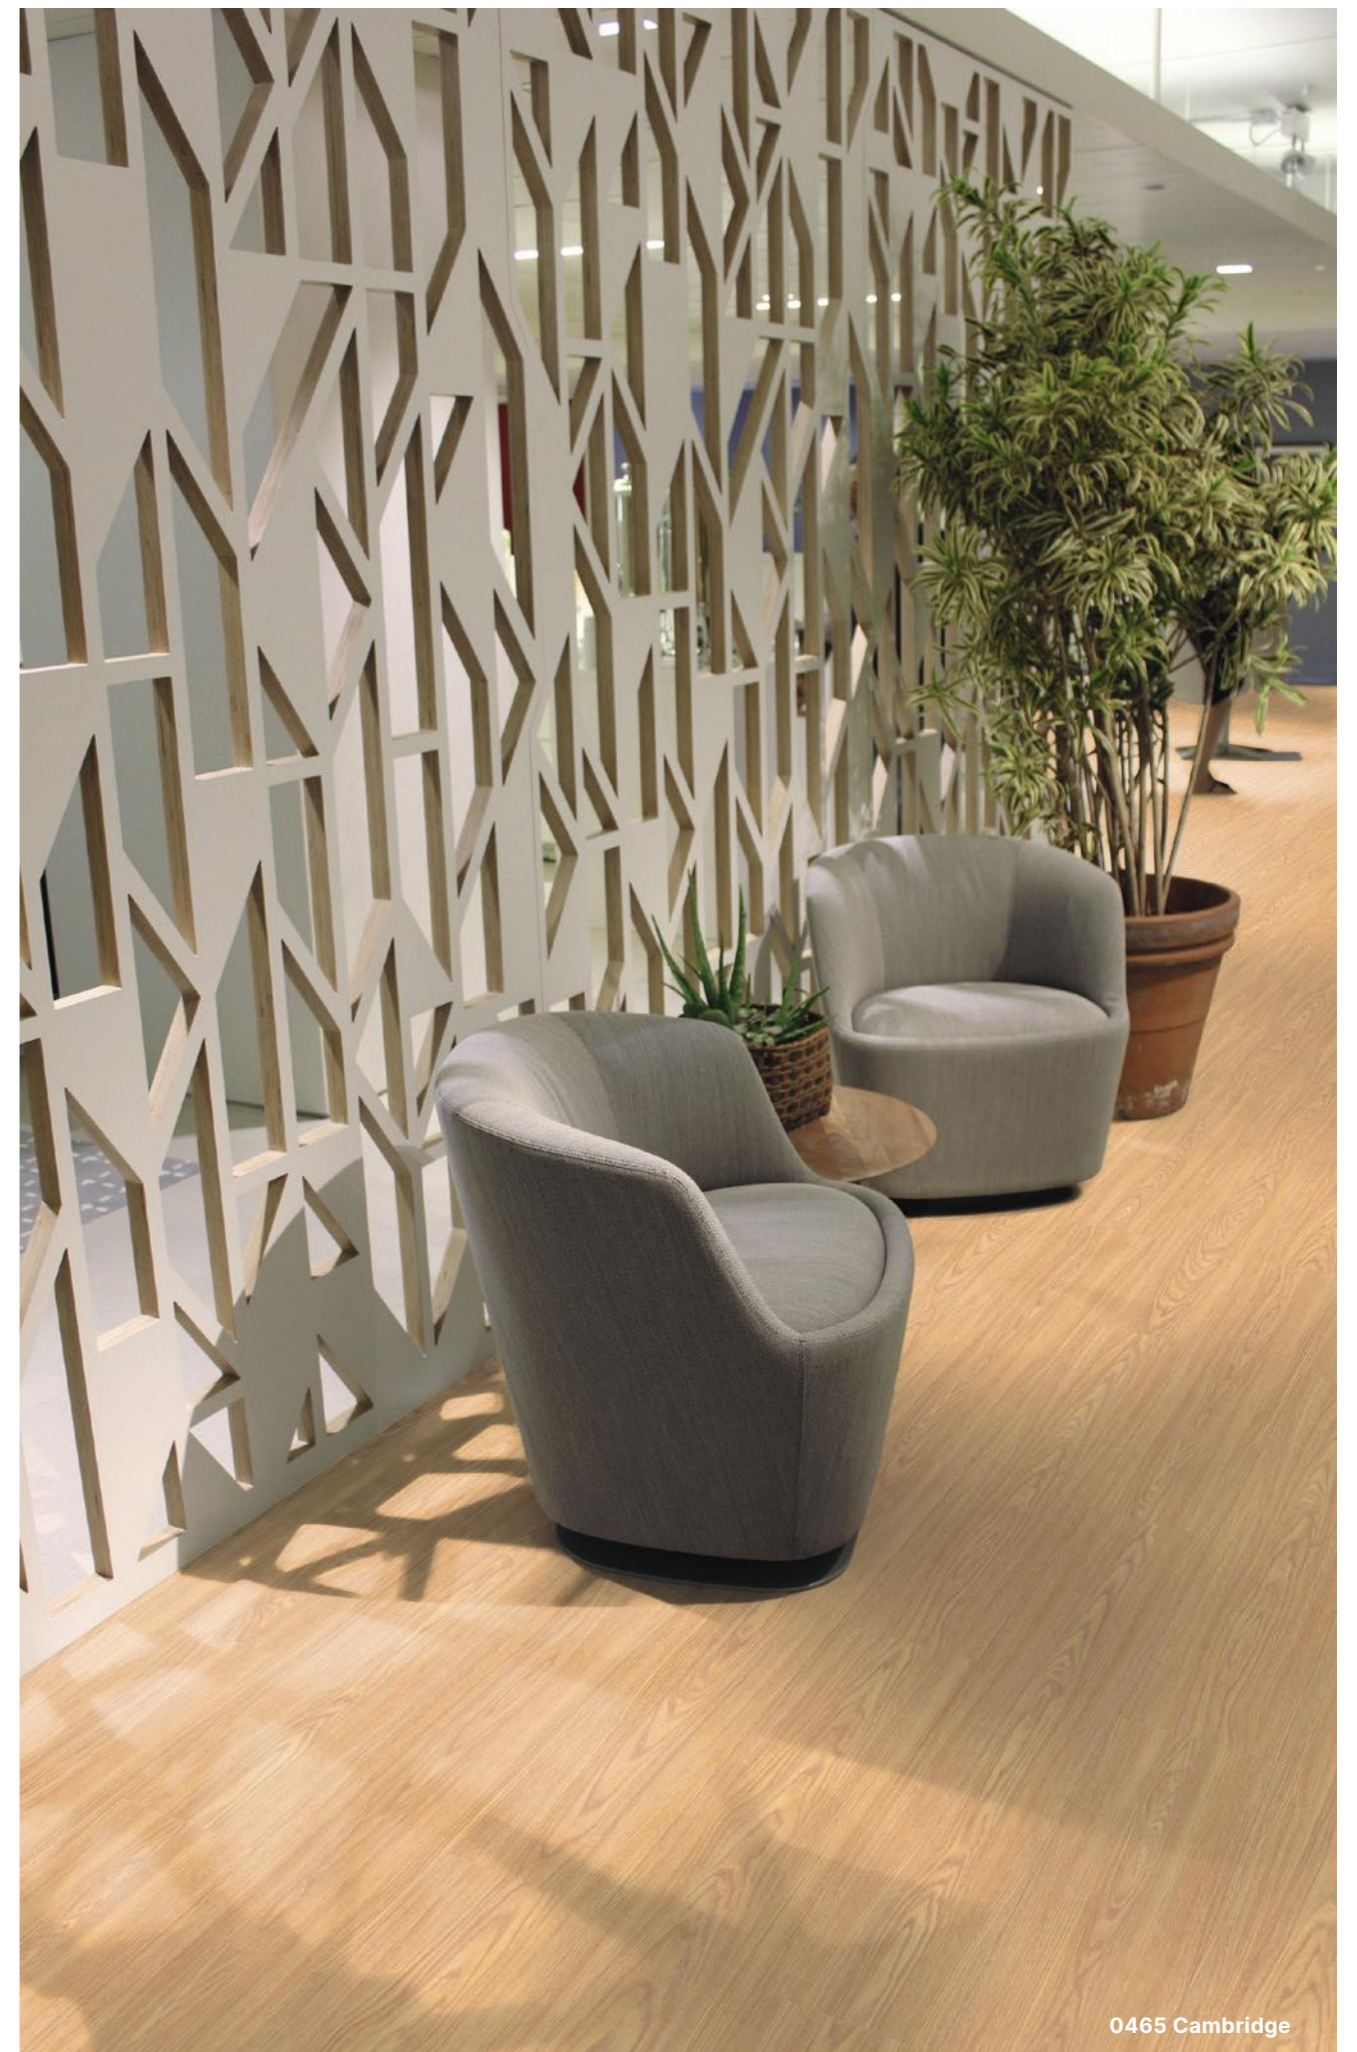

0465 Cambridge


# Creation 55

## Luxury Vinyl Tiles & Planks (LVT)

- > **Creation 55 Dryback** is a glued floorcovering
- > **Creation 55 Solid Clic** interlocking planks that can be laid without adhesive
- > **Creation 55 Rigid Acoustic** "Full rigid board" technology with an integrated acoustic underlay
- > **Creation 55 Looselay / Looselay Acoustic** Looselay up to 30sqm, removable installation with tackifier above 30sqm. Acoustic version delivers 19dB impact sound reduction
- > Suitable for medium traffic areas
- > Low maintenance due to Polyurethane (ProtecShield™) surface treatment



0584 White Lime Y: 36.0  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm




0859 Quartet Fauve Y: 23.9  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm | LL 229 × 1220mm



0858 Stripe Oak Ice Y: 37.3  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm



0503 Quartet Y: 19.4  
DB 184 × 1219mm, 152 × 762mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm, 125 × 750mm

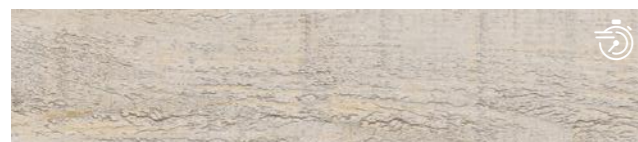

0060 Arena Y: 37.2  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
LL 229 × 1220mm | LL AC 229 × 1220mm



0848 Swiss Oak Beige Y: 40.1  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm



0448 Malua Bay Y: 47.1  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm



0455 Longboard Y: 24.8  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm




0856 Paint Wood Taupe Y: 18.9  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm



0457 Buffalo Y: 16.3  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm




0456 Ranch Y: 23.5  
DB 184 × 1219mm, 230 × 1500mm  
SOLID CLIC 212 × 1239mm, 240 × 1461mm | RIGID AC 177 × 1219mm  
LL 229 × 1220mm | LL AC 229 × 1220mm



0061 Oxford Y: 19.2  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm

ProtecShield™ | **0.55mm** Wear Layer | T Wear Group | **R10** Slip Resistant | Y = Light Reflectance Value (LRV) | Stocked for quick delivery see page 4

**DB** Creation 55 Dryback | **SOLID CLIC** Creation 55 Solid Clic | **RIGID AC** Creation 55 Rigid Acoustic | **LL** Creation 55 Looselay | **LL AC** Creation 55 Looselay Acoustic  
Min order quantity 800m<sup>2</sup>  
Lead time applies

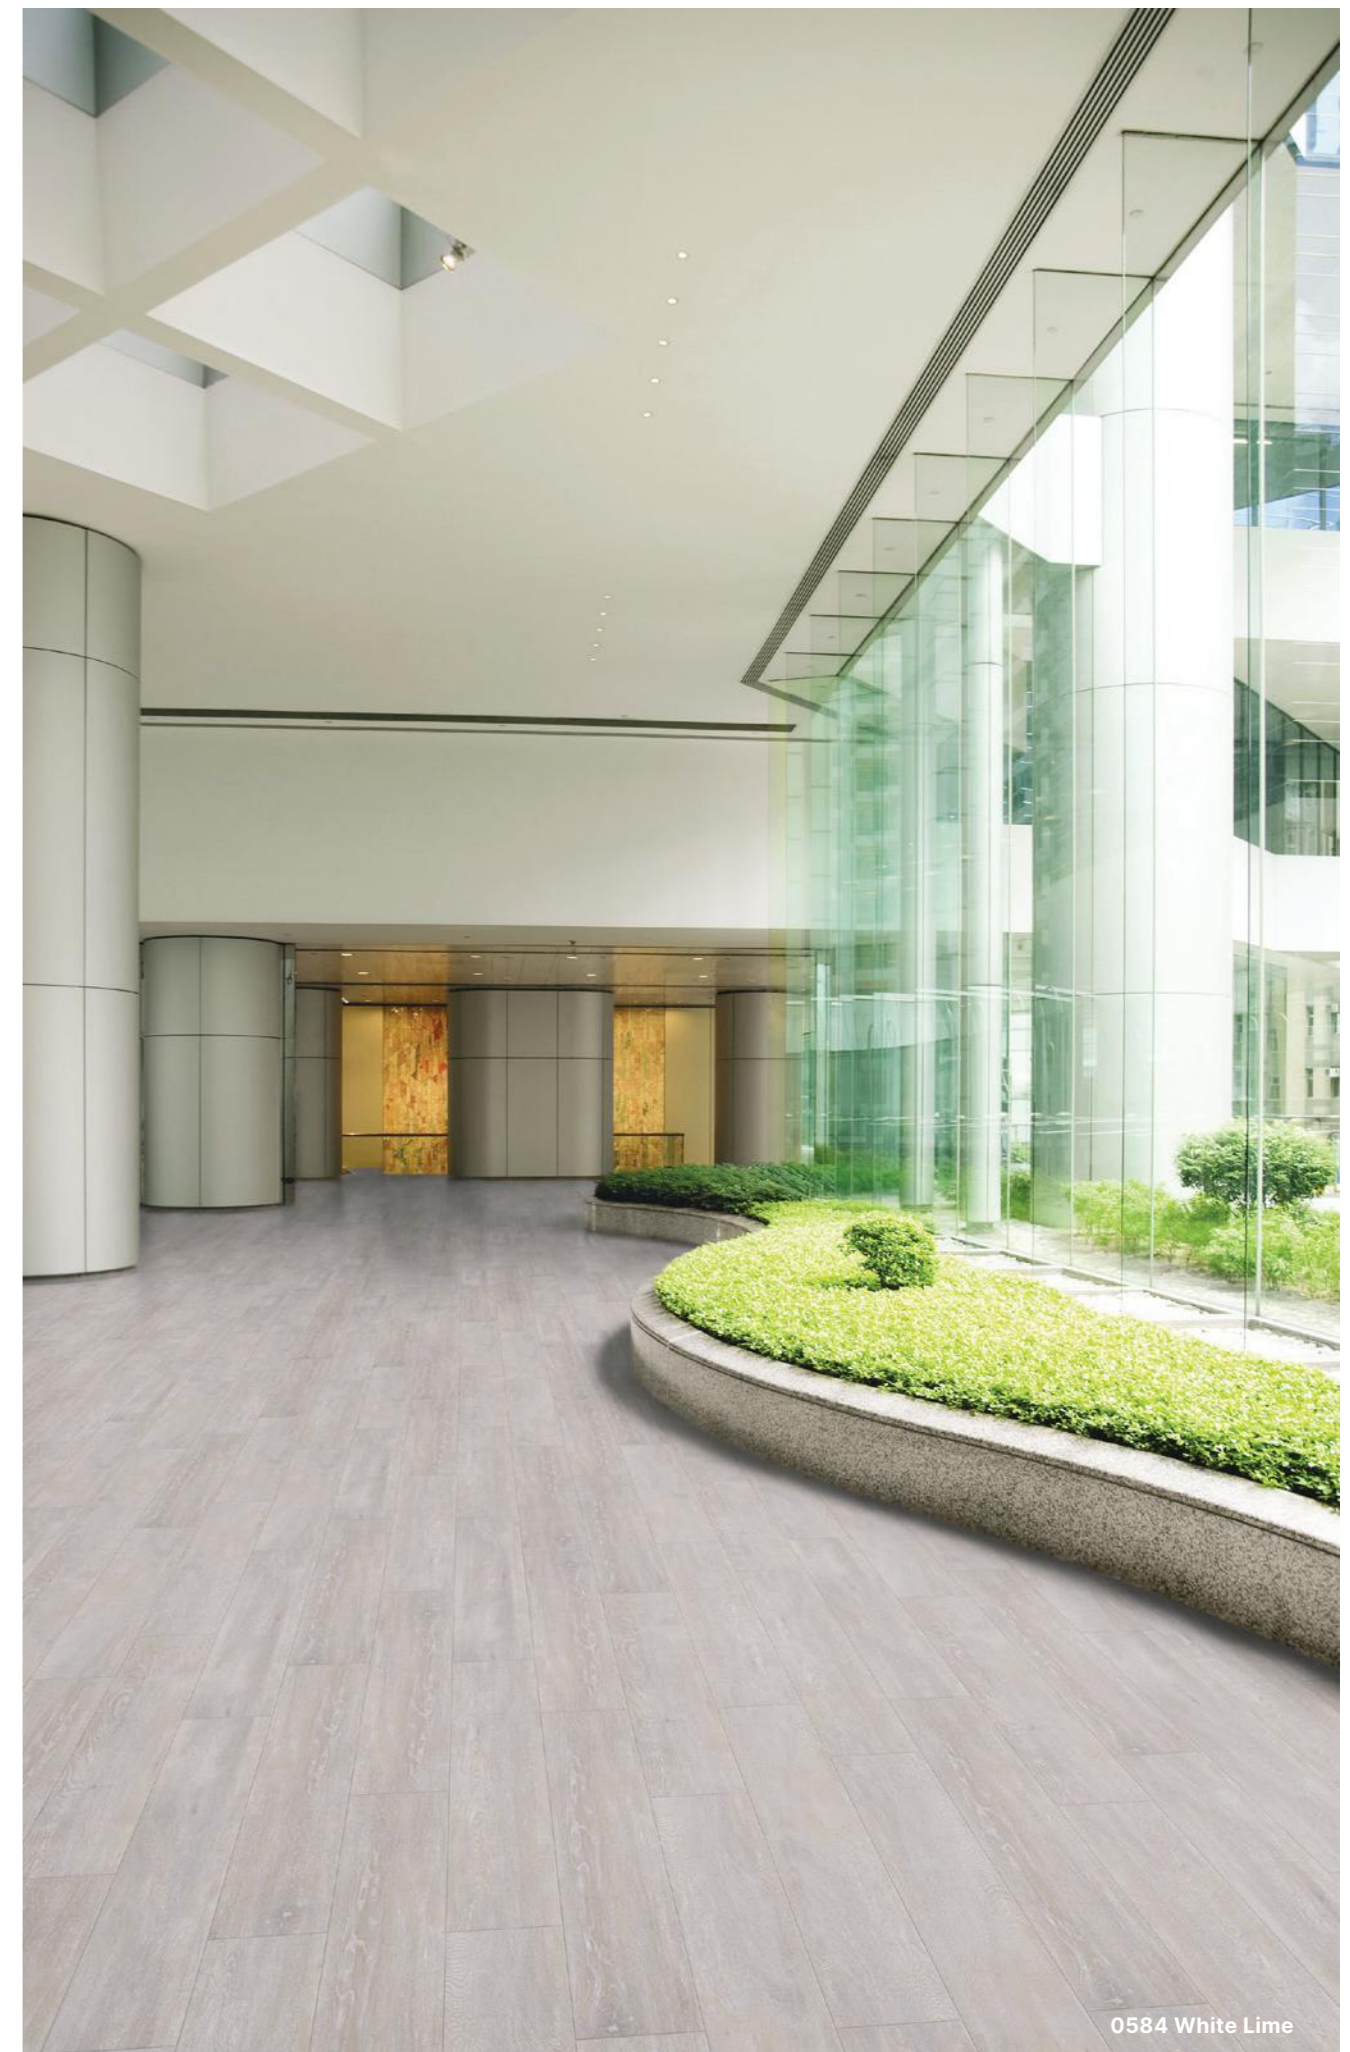

0584 White Lime

# Creation 55

## Luxury Vinyl Tiles & Planks (LVT)

- > **Creation 55 Dryback** is a glued floorcovering
- > **Creation 55 Solid Clic** interlocking planks that can be laid without adhesive
- > **Creation 55 Rigid Acoustic** "Full rigid board" technology with an integrated acoustic underlay
- > **Creation 55 Looselay / Looselay Acoustic** Looselay up to 30sqm, removable installation with tackifier above 30sqm. Acoustic version delivers 19dB impact sound reduction
- > Suitable for medium traffic areas
- > Low maintenance due to Polyurethane (ProtecShield™) surface treatment




1281 Palissandro Grey Y: 38.4  
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm



1282 Palissandro Beige Y: 32.1  
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm



1287 Salento Light Grey Y: 46.6  
DB 184 × 1219mm | SOLID CLIC 212 × 1239 mm  
RIGID AC 177 × 1219mm

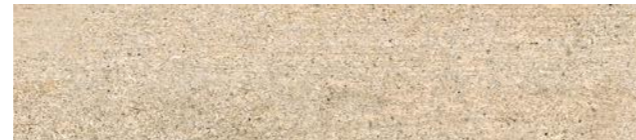

1286 Salento Beige Y: 37.0  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm



0069 Mansfield Natural Y: 37.7  
DB 184 × 1219mm



0579 Amarante Y: 21.3  
DB 184 × 1219mm



0447 Amador Y: 25.1  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm




0068 Mansfield Light Y: 31.8  
DB 184 × 1219mm



0461 Michigan Y: 13.5  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm



0445 Rustic Oak Y: 20.4  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm

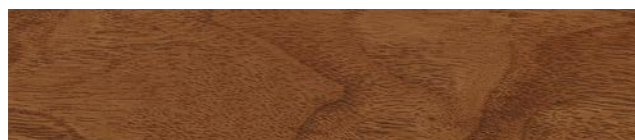

0459 Brownie Y: 10.7  
DB 184 × 1219mm

ProtecShield™ | **0.55mm** Wear Layer | T Wear Group | **R10** Slip Resistant | Y = Light Reflectance Value (LRV) | Stocked for quick delivery see page 4

**DB** Creation 55 Dryback | **SOLID CLIC** Creation 55 Solid Clic | **RIGID AC** Creation 55 Rigid Acoustic | **LL** Creation 55 Looselay | **LL AC** Creation 55 Looselay Acoustic  
Min order quantity 800m<sup>2</sup>  
Lead time applies



0447 Amador

# Creation 55

## Luxury Vinyl Tiles & Planks (LVT)

- > **Creation 55 Dryback** is a glued floorcovering
- > **Creation 55 Solid Clic** interlocking planks that can be laid without adhesive
- > **Creation 55 Looselay / Looselay Acoustic** Looselay up to 30sqm, removable installation with tackifier above 30sqm.  
Acoustic version delivers 19dB impact sound reduction
- > Suitable for medium traffic areas
- > Low maintenance due to Polyurethane (ProtecShield™) surface treatment



1280 Charming Oak Brown Y: 13.4  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm



1277 Charming Oak Nature Y: 18.6  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm




1278 Charming Oak Beige Y: 31.5  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm



1279 Charming Oak Grey Y: 36.2  
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm  
RIGID AC 177 × 1219mm



1274 Lounge Oak Chestnut Y: 20.5  
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm  
RIGID AC 225 × 1524mm

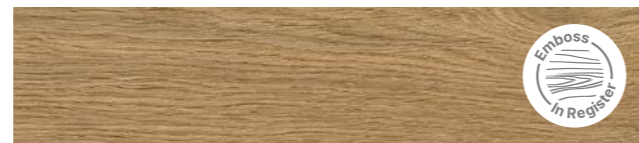

1271 Lounge Oak Golden Y: 23.8  
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm  
RIGID AC 225 × 1524mm




1273 Lounge Oak Natural Y: 30.2  
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm  
RIGID AC 225 × 1524mm




1272 Lounge Oak Beige Y: 33.9  
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm  
RIGID AC 225 × 1524mm



1290 White Lead Oak Shadow Grey Y: 34.6  
DB 184 × 1219mm




1288 White Lead Oak Blond Y: 29.6  
DB 184 × 1219mm

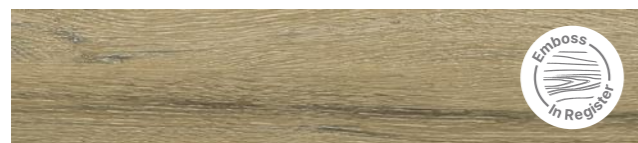

1289 White Lead Oak Dark Beige Y: 25.3  
DB 184 × 1219mm

ProtecShield™ | **0.55mm** Wear Layer | T Wear Group | **R10** Slip Resistant | Y = Light Reflectance Value (LRV)

DB Creation 55 Dryback | **SOLID CLIC** Creation 55 Solid Clic | **RIGID AC** Creation 55 Rigid Acoustic |  **EIR = Emboss In Register** Synchronized graining with the decor for hyper-realistic rendering




1288 White Lead Oak Blond

# Creation 55

## Luxury Vinyl Tiles & Planks (LVT)

- > **Creation 55 Dryback** is a glued floorcovering
- > **Creation 55 Solid Clic** interlocking planks that can be laid without adhesive
- > **Creation 55 Rigid Acoustic** "Full rigid board" technology with an integrated acoustic underlay
- > **Creation 55 Looselay / Looselay Acoustic** Looselay up to 30sqm, removable installation with tackifier above 30sqm. Acoustic version delivers 19dB impact sound reduction
- > Suitable for medium traffic areas
- > Low maintenance due to Polyurethane (ProtecShield™) surface treatment



1284 Urban Street Medium  
DB 914 × 914mm  
SOLID CLIC 389 × 729mm  
LL 600 × 600mm  
Y: 26.5




1283 Urban Street Light  
DB 914 × 914mm  
SOLID CLIC 389 × 729mm  
LL 600 × 600mm  
Y: 42.3



1285 Urban Street Beige  
DB 914 × 914mm  
Y: 31.2




0373 Silver City  
DB 610 × 610mm  
Y: 19.1



0436 Riverside  
DB 610 × 610mm  
SOLID CLIC 389 × 729mm  
RIGID AC 457 × 914mm  
LL 600 × 600mm  
Y: 16.7



1275 Curton Stone  
Light Grey  
DB 457 × 914mm  
SOLID CLIC 389 × 729mm  
RIGID AC 457 × 914mm  
Y: 45.9



1276 Curton Stone  
Light Beige  
DB 457 × 914mm  
SOLID CLIC 389 × 729mm  
RIGID AC 457 × 914mm  
Y: 48.9



1269 Fabrik Mix Dark Grey  
DB 610 × 610mm  
SOLID CLIC 389 × 729mm  
LL 600 × 600mm  
Y: 13.4




1270 Fabrik Mix Indigo  
DB 610 × 610mm  
LL 600 × 600mm  
Y: 17.1



1268 Fabrik Mix Jute  
DB 610 × 610mm  
SOLID CLIC 389 × 729mm  
Y: 26.3



0868 Bloom Uni Taupe  
DB 610 × 610mm  
SOLID CLIC 389 × 729mm  
RIGID AC 457 × 914mm  
LL 600 × 600mm  
Y: 28.5



0618 Carmel  
DB 457 × 914mm  
SOLID CLIC 389 × 729mm  
RIGID AC 457 × 914mm  
LL 500 × 500mm  
LL AC 500 × 500mm  
Y: 19.2



0374 Parker Station  
DB 610 × 610mm  
SOLID CLIC 389 × 729mm  
RIGID AC 457 × 914mm  
LL 500 × 500mm  
LL AC 500 × 500mm  
Y: 12.6



0869 Bloom Uni Grey  
DB 610 × 610mm  
SOLID CLIC 389 × 729mm  
RIGID AC 457 × 914mm  
LL 600 × 600mm  
Y: 23.2

ProtecShield™ | 0.55mm Wear Layer | T Wear Group | R10 Slip Resistant | Y = Light Reflectance Value (LRV) | Stocked for quick delivery see page 4

DB Creation 55 Dryback | SOLID CLIC Creation 55 Solid Clic | RIGID AC Creation 55 Rigid Acoustic | LL Creation 55 Looselay | LL AC Creation 55 Looselay Acoustic  
Min order quantity 800m<sup>2</sup>  
Lead time applies



1284 Urban Street Medium / 1283 Urban Street Light



# Creation Zen Luxury Vinyl Tiles & Planks (LVT)

NEW

**Creation Zen** is a new generation of acoustic LVT which delivers up to 20dB impact sound insulation. Creation 70 Zen offers a 0.7mm wear layer for high-traffic applications and Creation 55 Zen has a 0.63mm transparent wear layer for medium-traffic applications. Both ranges are ideal for areas where sound insulation is needed such as offices, hotels, education spaces and retirement homes. Available in realistic wood, mineral and textile designs to complement a wide range of decor schemes.

Creation Zen is light, flexible, easy to transport and cut, providing a fast and easy looselay installation on tackifier or alternatively, can be installed gluedown. It has a ProtecShield™ surface treatment which prevents micro-scratches and provides stain resistance and easy cleaning.

Creation Zen has the lowest carbon footprint of all loose lay LVT's, containing at least 15% recycled content and is 100% recyclable.



Creation Zen  
The new generation of  
acoustic Luxury Vinyl Tile

1419 Swiss Oak Golden / 0963 Bloom Uni Perle



					Creation Zen	
					Creation Zen 70	Creation Zen 55
<b>Description</b>						
Thickness	EN ISO 24346	mm	4.35		4.25	
Wear layer thickness	EN ISO 24340	mm	0.70		0.63	
Weight	EN ISO 23997	g/m <sup>2</sup>	3670		3570	
Size	EN ISO 24342	mm		Planks: 245 × 1250 150 × 750  Tile: 500 × 500	Planks: 245 × 1250 150 × 750  Tile: 500 × 500	
<b>Classification</b>						
Norm / Product specification	-	-	EN ISO 11638 (ex EN 651)		EN ISO 11638 (ex EN 651)	
European classification	EN ISO 10874	class	33 - 42		33 - 42	
Room Impact	NFS 31074	dB	<65		<65	
Fire rating	EN 13501-1	class	Bfl-s1		Bfl-s1	
Static electrical propensity	EN 1815	kV	< 2		< 2	
Slip resistance wet	DIN 51130	class	R10		R10	
<b>Performances</b>						
Wear resistance	EN 660.2	mm <sup>3</sup>	< 2.0		< 2.0	
Wear group	QB 30	group	T		T	
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.25		≤ 0.25	
Dimensional stability (measured value)	-	%	≤ 0.03		≤ 0.03	
Residual indentation	EN ISO 24343-1	mm	≤ 0.20		≤ 0.20	
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25		0.25	
Colour fastness	EN ISO 105-B02	degree	≥ 6		≥ 6	
Impact sound insulation	EN ISO 717-2	dB	20		20	
Chemical products resistance	EN ISO 26987	-	OK		OK	
Surface treatment	-	-	ProtecShield™		ProtecShield™	
TVOC after 28 days	ISO 16000-6	µg/m3	< 10		< 10	
<b>CE Marking</b>						
CE			EN 14041			

# Creation Zen


## Luxury Vinyl Tiles & Planks (LVT)

**NEW**

- > **Zen** for planet: The lowest carbon impact of loose-lay LVTs
- > **Zen** for the user: -20dB sound insulation
- > **Zen** for the installer: Light and flexible, easy to transport and cut
- > Low maintenance due to the ProtecShield™ surface treatment



1416 Bostonian Oak Beige  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 31.9

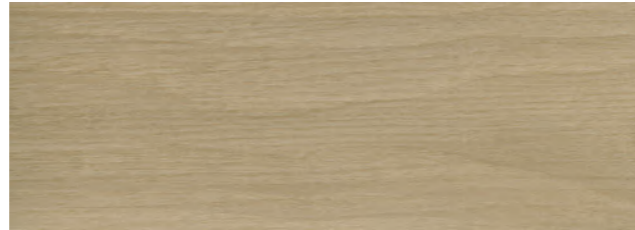

1478 Bostonian Oak Kraft  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 36




1415 Bostonian Oak  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 26.2



1422 Bostonian Oak Medium  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 15.6



1421 Bostonian Oak Dark  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 15

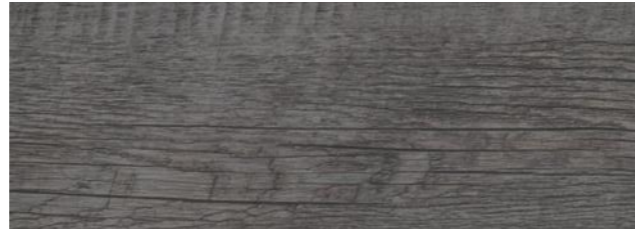

0953 Ranch Anthracite  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 16.4



0773 Ranch  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 25.3

**0.7mm** Wear Layer

**0.63mm** Wear Layer

ProtecShield™

T Wear Group

R10 Slip Resistant

Y = Light Reflectance Value (LRV)



1415 Bostonian Oak

# Creation Zen

## Luxury Vinyl Tiles & Planks (LVT)

**NEW**

- > **Zen** for planet: The lowest carbon impact of loose-lay LVTs
- > **Zen** for the user: -20dB sound insulation
- > **Zen** for the installer: Light and flexible, easy to transport and cut
- > Low maintenance due to the ProtecShield™ surface treatment



1418 Swiss Oak Beige  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 44.1



1419 Swiss Oak Golden  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 26.4




1420 Swiss Oak Pearl  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 36.5




1481 Nature Oak Taupe  
70 Zen 245 × 1250mm, 150 × 750mm  
55 Zen 245 × 1250mm, 150 × 750mm  
Y: 20.7



1479 Nature Oak Kraft  
70 Zen 245 × 1250mm, 150 × 750mm  
55 Zen 245 × 1250mm, 150 × 750mm  
Y: 32.5

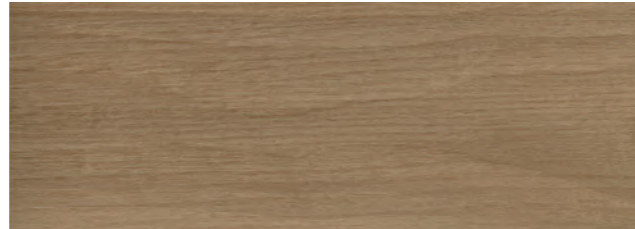

1480 Nature Oak Honey  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 19.5

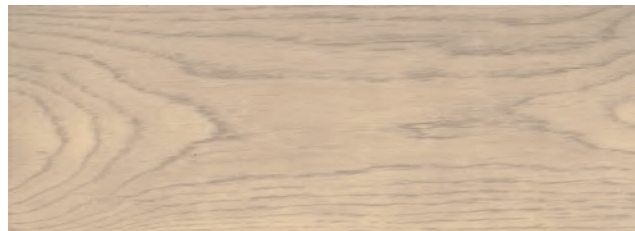

1417 Twist  
70 Zen 245 × 1250mm  
55 Zen 245 × 1250mm  
Y: 44

**0.7mm** Wear Layer

**0.63mm** Wear Layer

ProtecShield™

T Wear Group

R10 Slip Resistant

Y = Light Reflectance Value (LRV)



1479 Nature Oak Kraft

# Creation Zen

## Luxury Vinyl Tiles & Planks (LVT)

**NEW**

- > **Zen** for planet: The lowest carbon impact of looselay LVTs
- > **Zen** for the user: -20dB sound insulation
- > **Zen** for the installer: Light and flexible, easy to transport and cut
- > Low maintenance due to the ProtecShield™ surface treatment



1064 Finesse Nature  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 37.6



1489 Finesse Grey  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 29.5



1063 Finesse Brown  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 36




1066 Finesse Poudre  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 40.5




1488 Finesse Denim  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 19.7



1487 Finesse Green  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 20.7



0963 Bloom Uni Perle  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 43




1482 Bloom Uni Clear  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 45.1



1412 Bloom Uni Taupe  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 27.7




1484 Bloom Uni Brown  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 22.3




1485 Bloom Uni Souris  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 27.3



1413 Bloom Uni Grey  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 21.8



1483 Bloom Uni Black  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 5.8



1486 Parker Clear  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 29



1414 Parker Station  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 17.1



0817 Cocoon Metal  
70 Zen 500 × 500mm  
55 Zen 500 × 500mm  
Y: 34.7

**0.7mm** Wear Layer

**0.63mm** Wear Layer

ProtecShield™

T Wear Group

R10 Slip Resistant

Y = Light Reflectance Value (LRV)



0963 Bloom Uni Perle / 1412 Bloom Uni Taupe

# Saga<sup>2</sup> Luxury Vinyl Tiles

**Saga<sup>2</sup>** is a fast track loose lay tile that provides the durability of a compact tile with the comfort of an acoustic tile. The tile overcomes the difficulty of many irregular sub-floors and prevents their indentations transferring to the surface. With a wide range of stylish designs available and is suitable for high traffic areas including offices, boutiques, public areas as well as other administrative areas.



High traffic floor tile, removable installation suitable for raised floors

0030 Gentleman Blue



Saga<sup>2</sup>

Description			
Thickness	EN ISO 24346	mm	4.6
Wear layer thickness	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/m <sup>2</sup>	5595
Size	EN ISO 24342	mm	500 × 500
Classification			
Norm / Product specification	-	-	EN 652
European classification	EN ISO 10874	class	34-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	DIN 51 130	class	R10
Performances			
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0
Wear group	EN 652	-	T
Dimensional stability	EN ISO 23999	%	≤ 0.15
Residual indentation	EN ISO 24343-1	mm	≤ 0.13
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25
Impact sound insulation	EN ISO 717-2	dB	15
Colour fastness	EN ISO 105-B02	degree	≥ 6
Chemical products resistance	EN ISO 26987	-	OK
Surface treatment	-	-	Protectsol®
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 100
CE Marking			
CE	EN 14041		

# Saga<sup>2</sup>

## Luxury Vinyl Tiles

- > Acoustic fast track tiles suitable for high traffic areas
- > ProtecSol® surface treatment - easy to maintain
- > Ideal for use alongside carpet tiles



0063 Rough Textile Grey  
500.5 × 500.5mm  
Y: 21.1



0062 Rough Textile Beige  
500.5 × 500.5mm  
Y: 25.4



0021 Barma Sweet  
500.5 × 500.5mm  
Y: 25.0



0023 Barma Mystery  
500.5 × 500.5mm  
Y: 11.3




0025 Barma Beige  
500.5 × 500.5mm  
Y: 34.3



0572 Amarante Dark  
500.5 × 500.5mm  
Y: 17.6



0579 Amarante  
500.5 × 500.5mm  
Y: 21.3



0028 Fiber Silver  
500.5 × 500.5mm  
Y: 35.5



0027 Fiber Heavy Metal  
500.5 × 500.5mm  
Y: 19.2




0026 Fiber Copper  
500.5 × 500.5mm  
Y: 34.0




0039 Spider Blue  
500.5 × 500.5mm  
Y: 17.4




0033 Spider Beige  
500.5 × 500.5mm  
Y: 60.9



0032 Mozaic Grey  
500.5 × 500.5mm  
Y: 38.3



0017 Kadina City  
500.5 × 500.5mm  
Y: 11.3



0577 Albion  
500.5 × 500.5mm  
Y: 21.8



0030 Gentleman Blue  
500.5 × 500.5mm  
Y: 8.7




0089 Gentleman Taupe  
500.5 × 500.5mm  
Y: 21.2




0088 Gentleman Grey  
500.5 × 500.5mm  
Y: 12.7



0029 Gentleman Beige  
500.5 × 500.5mm  
Y: 28.5



1088 Dalma Grey  
500.5 × 500.5mm  
Y: 19.0



1089 Dalma Burgundy  
500.5 × 500.5mm  
Y: 24.7



0085 Dock Grey  
500.5 × 500.5mm  
Y: 20.1



0087 Dock Taupe  
500.5 × 500.5mm  
Y: 19.2

ProtecSol® | 0.7mm Wear Layer | T Wear Group | R10 Slip Resistant | 15<sub>dB</sub> Quiet Underfoot | Y = Light Reflectance Value (LRV)



0029 Gentleman Beige / 0579 Amarante

## GRADUS

**Gradus Carpets** is a brand of the Gerflor Group and is a UK manufacturer of premium quality carpet tile and plank, broadloom and impervious backed carpets which excel in terms of functionality, aesthetics and ease of maintenance.

Utilising a range of high performance yarns, Gradus' extensive range of carpets are suitable for a wide variety of contract applications including commercial office, healthcare and education environments.



### Premium Collection

- Premium design and quality to suit the performance requirements of any area be it a commercial office, education or healthcare application

- Complementary yarn systems and colour bank provide coordinated design schemes

See pages 172-195



### High Performance Contractor Collection

- Competitively priced without compromising design or performance

See pages 196-206




### Secondary Barrier Matting

- Provides a solution for entrances, breakout areas or any heavy duty traffic area where contamination needs to be treated effectively

- Unique yarn system removes soil from foot traffic whilst absorbing moisture and being easy to clean

See pages 207-211

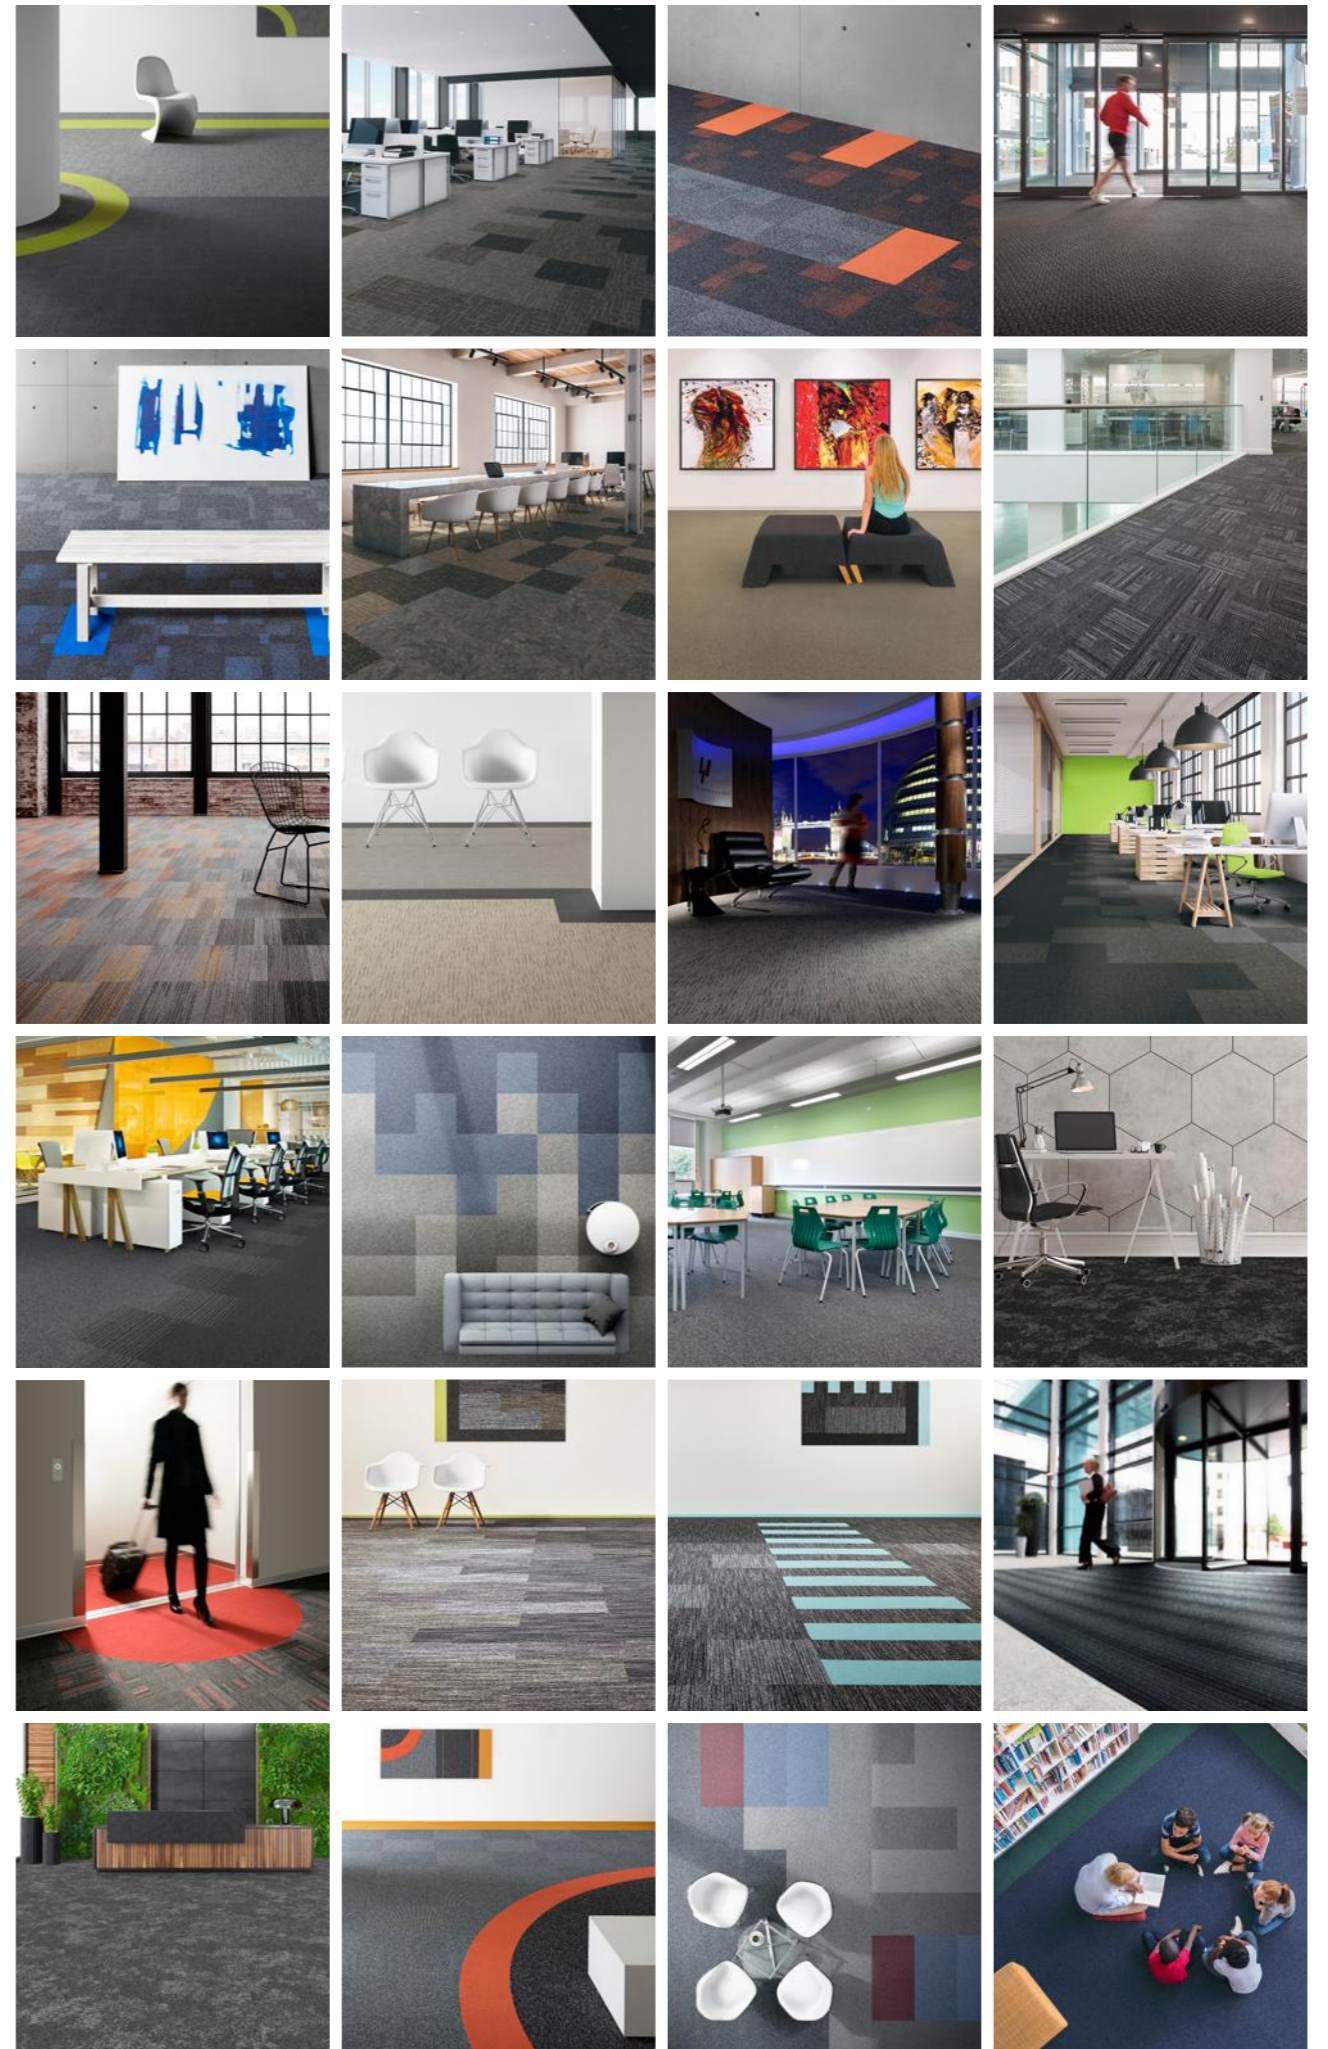


# Lunar


## Carpet Tile

Premium Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for flexible floor plans, or creating zones and transitions across the floor
- > Complements Creation 55 Looseley LVT

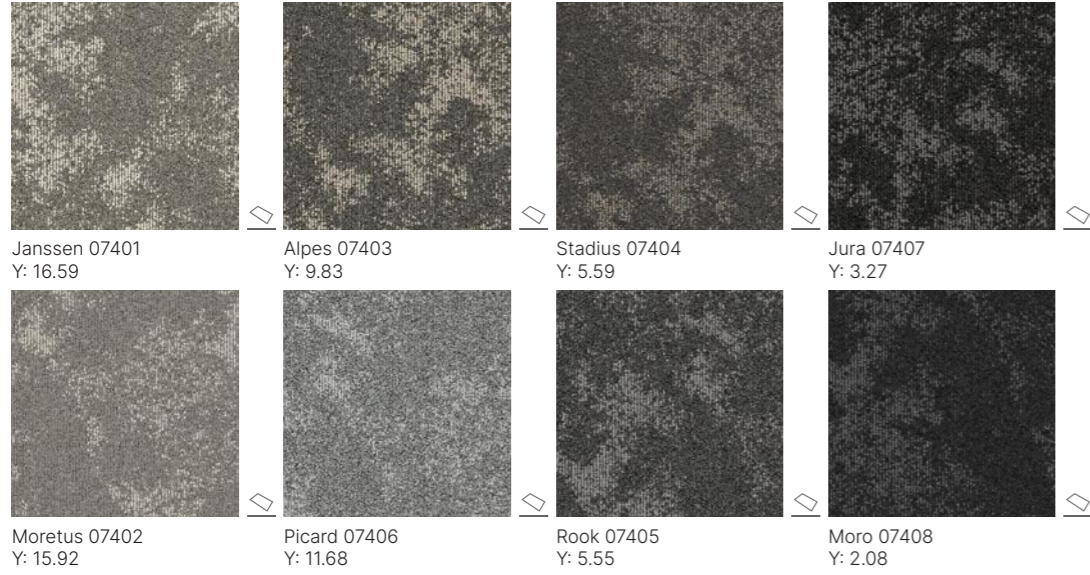

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon
Total Carpet Weight	3600 g/m <sup>2</sup>
Tufted Pile Weight	610 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen (contains 75% recycled material)
Total Carpet Thickness	6mm
For full specification information visit <a href="http://www.gerflor.co.uk">www.gerflor.co.uk</a>	



Random



Lunar - Moro 07408




# Urban Myth

## Carpet Tile


### Premium Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating zones and transitions across the floor
- > Complements Creation 55 Loose Lay LVT

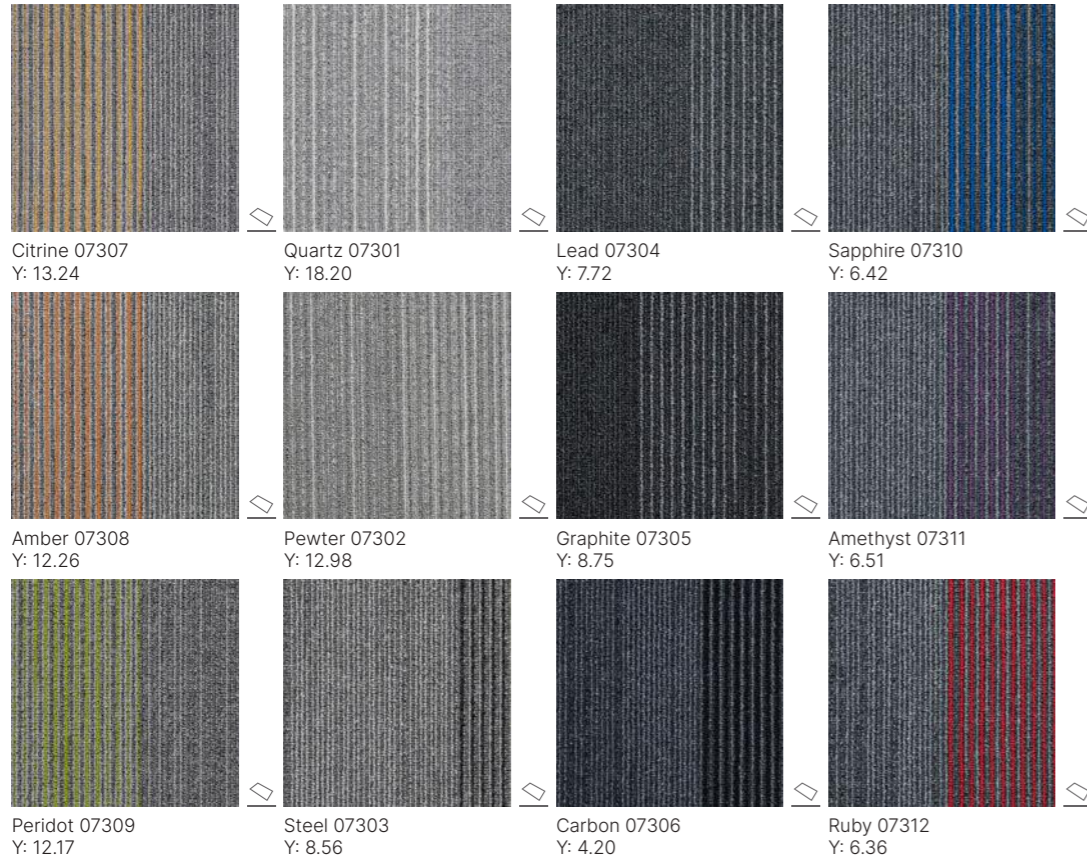

Urban Myth carpet tiles feature a selection of random designs

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon
Total Carpet Weight	3800 g/m <sup>2</sup>
Tufted Pile Weight	650 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen (contains 75% recycled material)
Total Carpet Thickness	6mm
For full specification information visit <a href="http://www.gerflor.co.uk">www.gerflor.co.uk</a>	

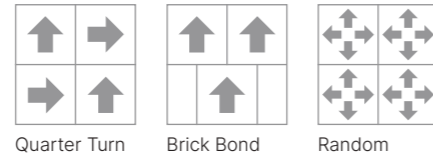


Urban Myth - Amber 07308, Citrine 07307, Pewter 07302, Steel 07303, Lead 07304 and Graphite 07305

# Urban Myth


## Carpet Plank

### Premium Collection


- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating feature areas and transitions across the floor
- > Complements Creation 55 Loose Lay LVT

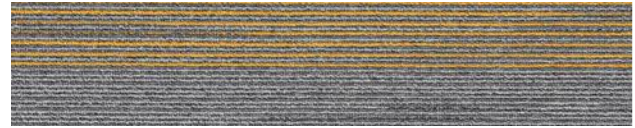

Citrine 07307 Y: 13.24

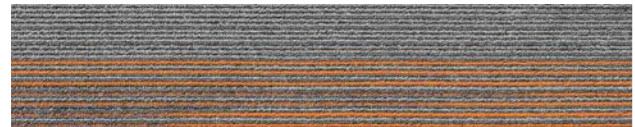

Amber 07308 Y: 12.26

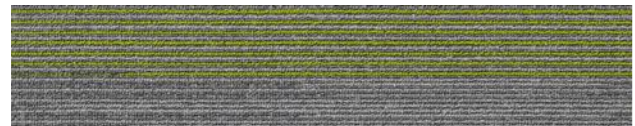

Peridot 07309 Y: 12.17




Sapphire 07310 Y: 6.42




Amethyst 07311 Y: 6.51




Ruby 07312 Y: 6.36

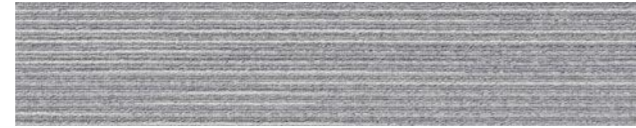

Quartz 07301 Y: 18.20

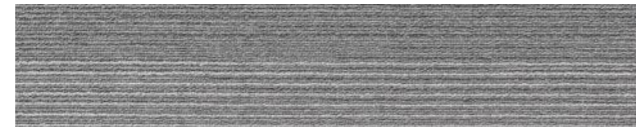


Pewter 07302 Y: 12.98



Steel 07303 Y: 8.56



Lead 07304 Y: 7.72



Graphite 07305 Y: 8.75




Carbon 07306 Y: 4.20


Urban Myth carpet planks feature a selection of random designs

Specification:	Plank
Product Dimensions	250mm x 1000mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon
Total Carpet Weight	3800 g/m <sup>2</sup>
Tufted Pile Weight	650 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen (contains 75% recycled material)
Total Carpet Thickness	6mm


For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)




Half Drop



Random Drop



Herringbone



Double Herringbone



Y = Light Reflectance Value (LRV)



Urban Myth - Sapphire 07310, Carbon 07306, Graphite 07305, Lead 07304, Steel 07303 and Pewter 07302

# Streetwise Style

## Carpet Tile

### Premium Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for flexible floor plans, or creating zones and transitions across the floor
- > Complements Creation 55 Looselay LVT

#### Trend



Focus 00573  
Y: 8.37

Cypher 00575  
Y: 6.63

Canon 00578  
Y: 3.37

Tempo 00546  
Y: 11.40

Rhythm 00547  
Y: 5.55

#### Flair



Focus 06774  
Y: 8.91

Cypher 06779  
Y: 6.73

Canon 06770  
Y: 3.52

Tempo 06776  
Y: 12.52

Rhythm 06778  
Y: 5.56

Specification:	Trend	Flair
Product Dimensions	500mm x 500mm	500mm x 500mm
Product Construction	Tufted Loop Pile	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon	100% Solution Dyed Nylon
Total Carpet Weight	4614 g/m <sup>2</sup>	4334 g/m <sup>2</sup>
Tufted Pile Weight	520 g/m <sup>2</sup>	500 g/m <sup>2</sup>
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen (contains 75% recycled material)	
Total Carpet Thickness	6.3mm	6.1mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)



Broadloom  
Flair



Quarter Turn  
Trend  
Flair



Brick Bond  
Trend  
Flair



Streetwise Style - Trend: Tempo 00546 and Rhythm 00547


# Streetwise Design

## Carpet Tile

### Premium Collection


- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for flexible floor plans, or creating zones and transitions across the floor
- > Complements Stratus, Emphasis and Creation 55 Looselay LVT

### Brights

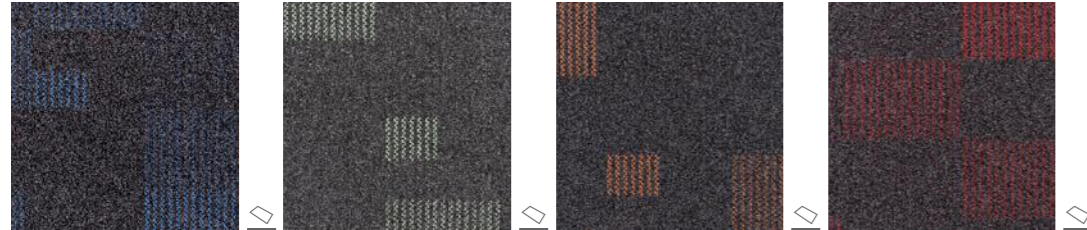

Blue 07204 Y: 4.33    Green 07203 Y: 5.95    Orange 07201 Y: 4.08    Red 07202 Y: 4.08


### Originals

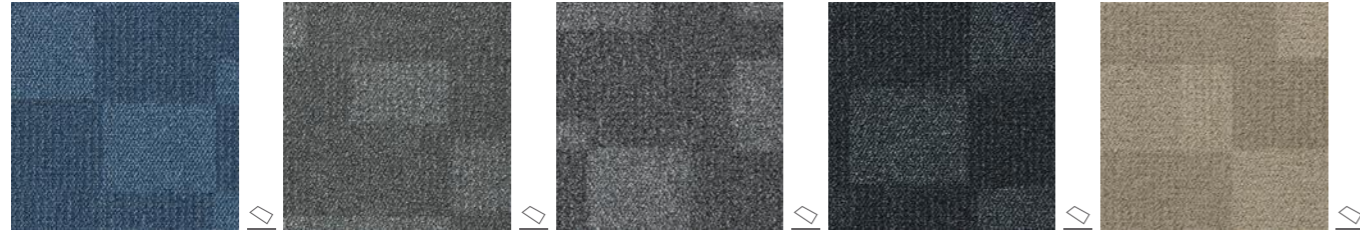



Slate 754 Y: 8.12    Flint 772 Y: 7.08    Iron 773 Y: 5.34    Coal 778 Y: 1.95    Clay 790 Y: 14.42

Streetwise Design carpet tiles feature a selection of random designs

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon
Total Carpet Weight	4500 g/m <sup>2</sup>
Tufted Pile Weight	650 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen (contains 75% recycled material)
Total Carpet Thickness	7mm
For full specification information visit <a href="http://www.gerflor.co.uk">www.gerflor.co.uk</a>	



Random

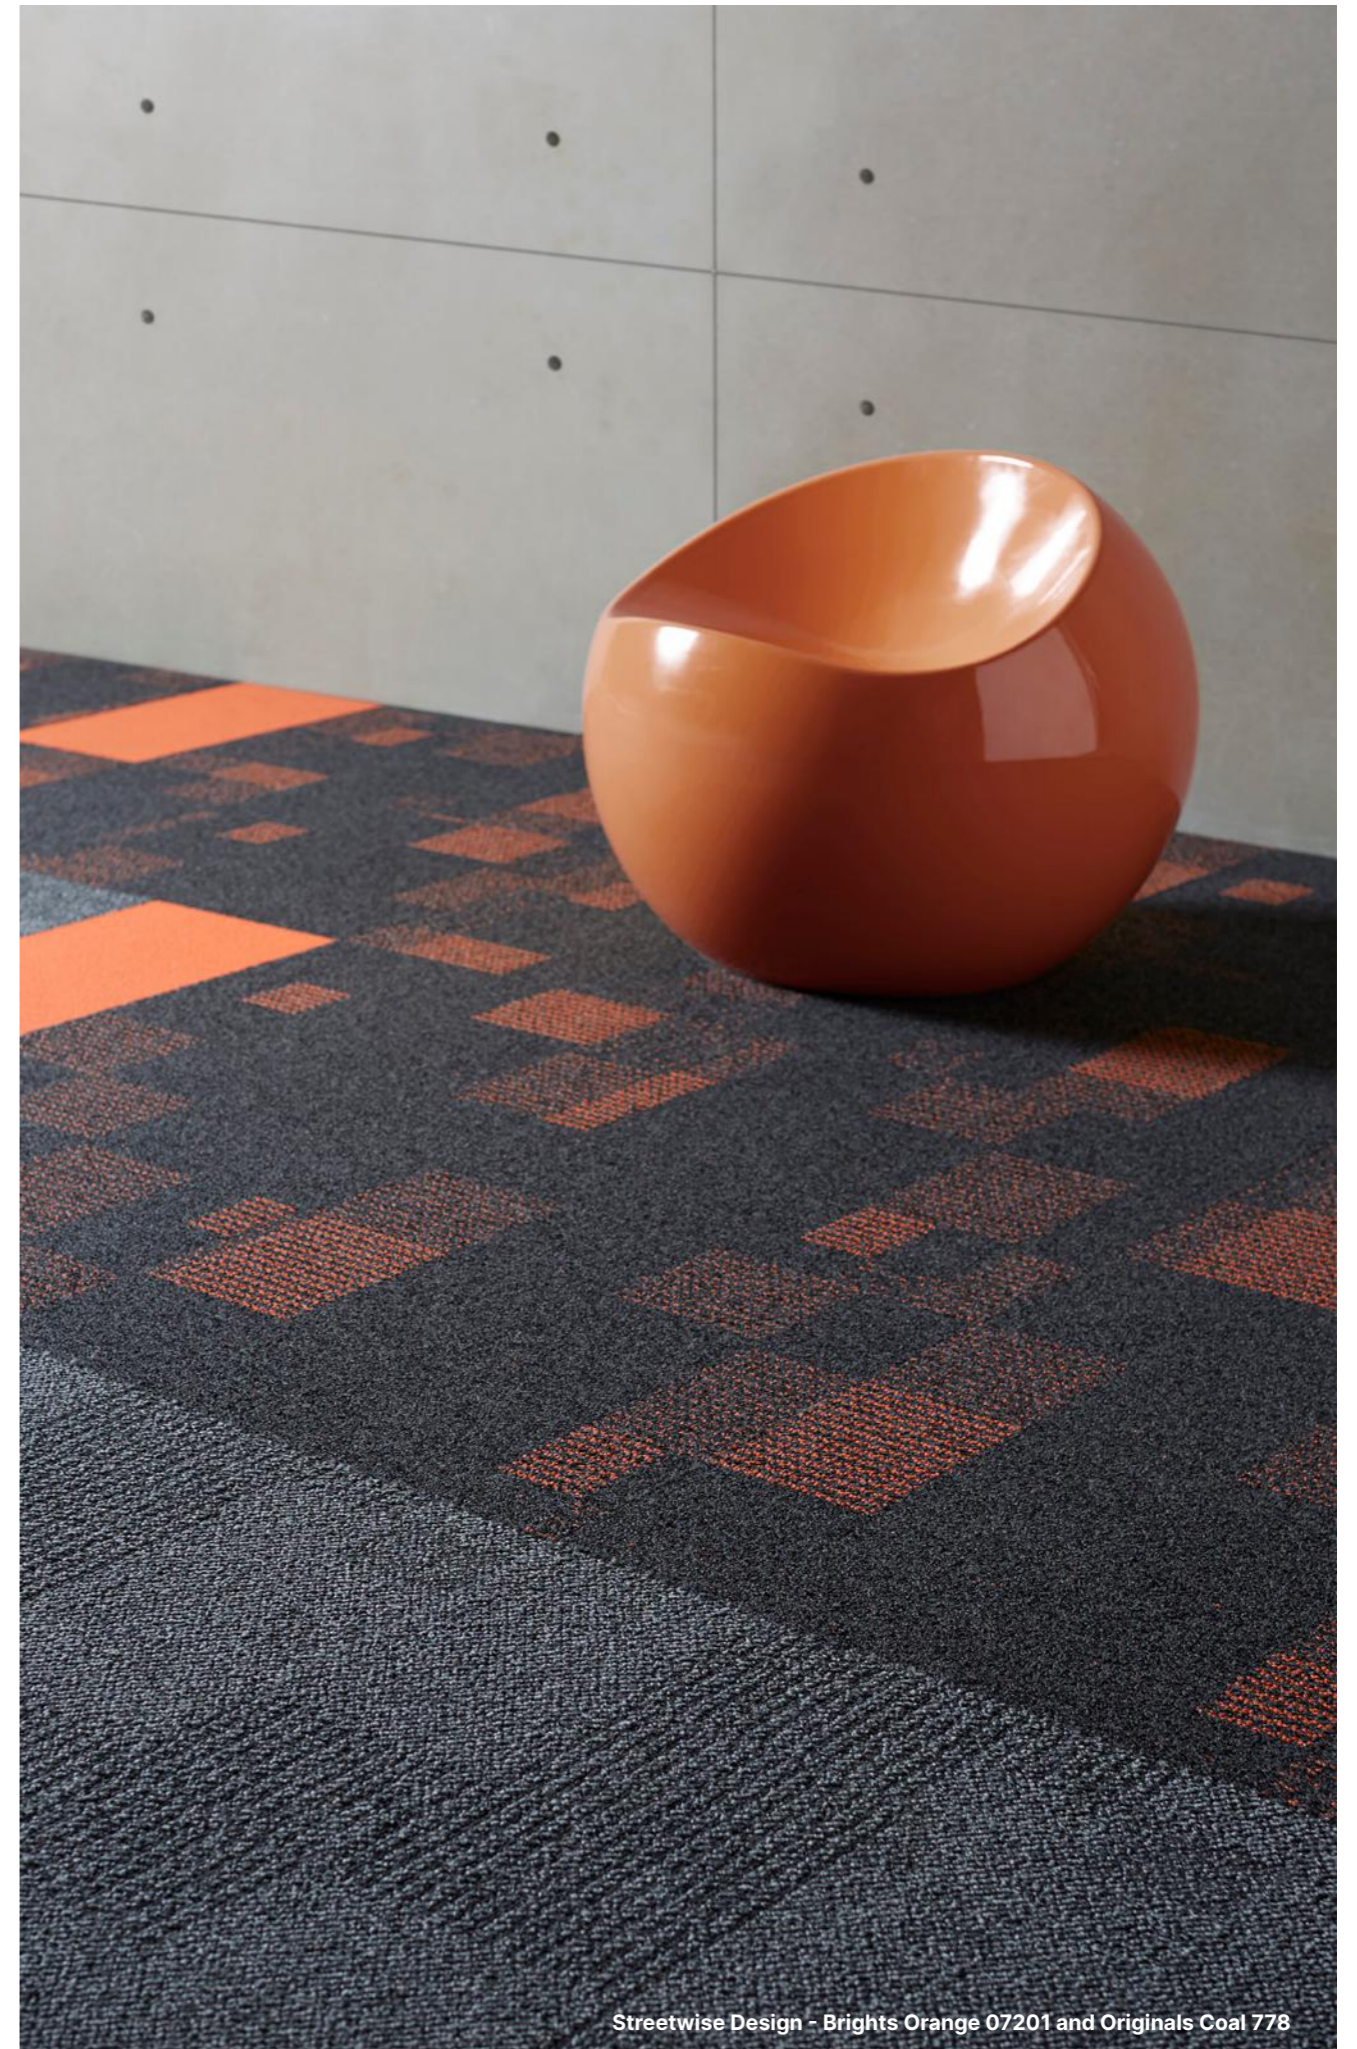

Streetwise Design - Brights Orange 07201 and Originals Coal 778


# Cityscene & Brickworks

## Carpet Tile

### Premium Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for flexible floor plans, or creating zones and transitions across the floor
- > Complements Creation 55 Loose Lay LVT

#### Cityscene

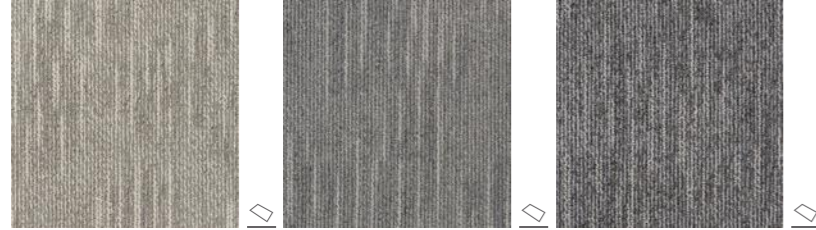


Tin 21 07501 Y: 17.12    Shale 21 07503 Y: 11.13    Granite 21 07505 Y: 8.39



Claystone 21 07502 Y: 12.54    Rhyolite 21 07504 Y: 9.92    Basalt 21 07506 Y: 3.25


#### Brickworks

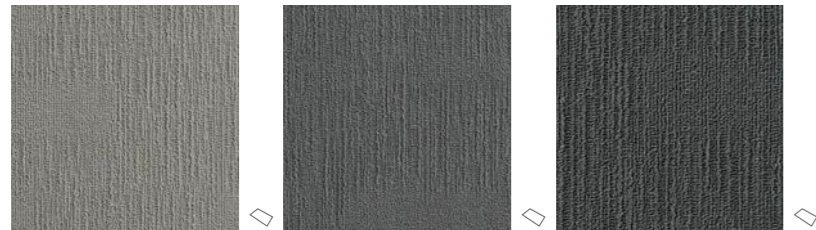

Ironstone 22 06707 Y: 7.9    Tonbridge 22 06711 Y: 4.49    Himley 22 06709 Y: 3.05

Specification:	Cityscene Tile	Brickworks Tile
Product Dimensions	500mm x 500mm	500mm x 500mm
Product Construction	Tufted Loop Pile	Tufted Textured Pattern Loop Pile
Surface Yarn	100% Solution Dyed Nylon	100% Solution Dyed Nylon
Total Carpet Weight	3880 g/m <sup>2</sup>	4030 g/m <sup>2</sup>
Tufted Pile Weight	650 g/m <sup>2</sup>	800 g/m <sup>2</sup>
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen (contains 75% recycled material)	
Total Carpet Thickness	5.8mm	6.5mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)

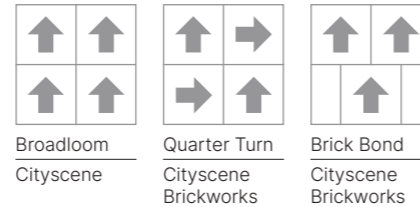


Cityscene - Claystone 21 07502 and Brickworks - Himley 06709 and Ironstone 06707

# Times Square

## Carpet Tile

### Premium Collection


- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for flexible floor plans, or creating zones and transitions across the floor
- > Excellent acoustic performance and comfort underfoot

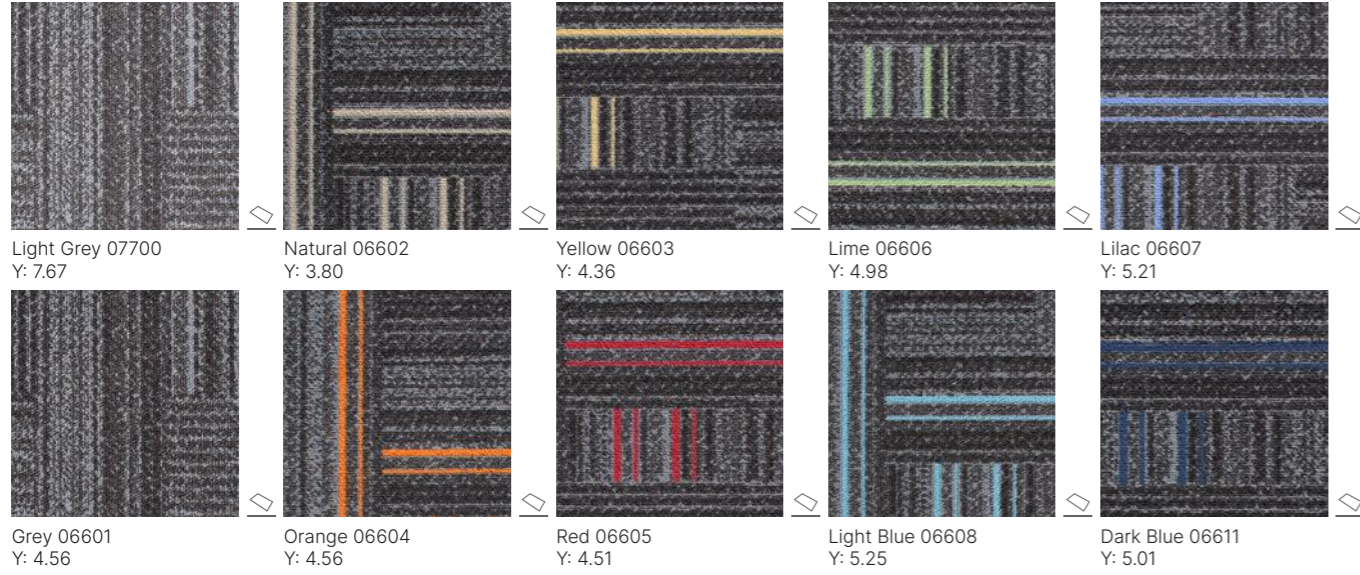


Times Square features 6 unique designs in each colourway

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Nylon
Total Carpet Weight	3700 g/m <sup>2</sup>
Tufted Pile Weight	420 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Comfort Lite 90% recycled open cell polyurethane cushion
Total Carpet Thickness	8.6mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)



Random

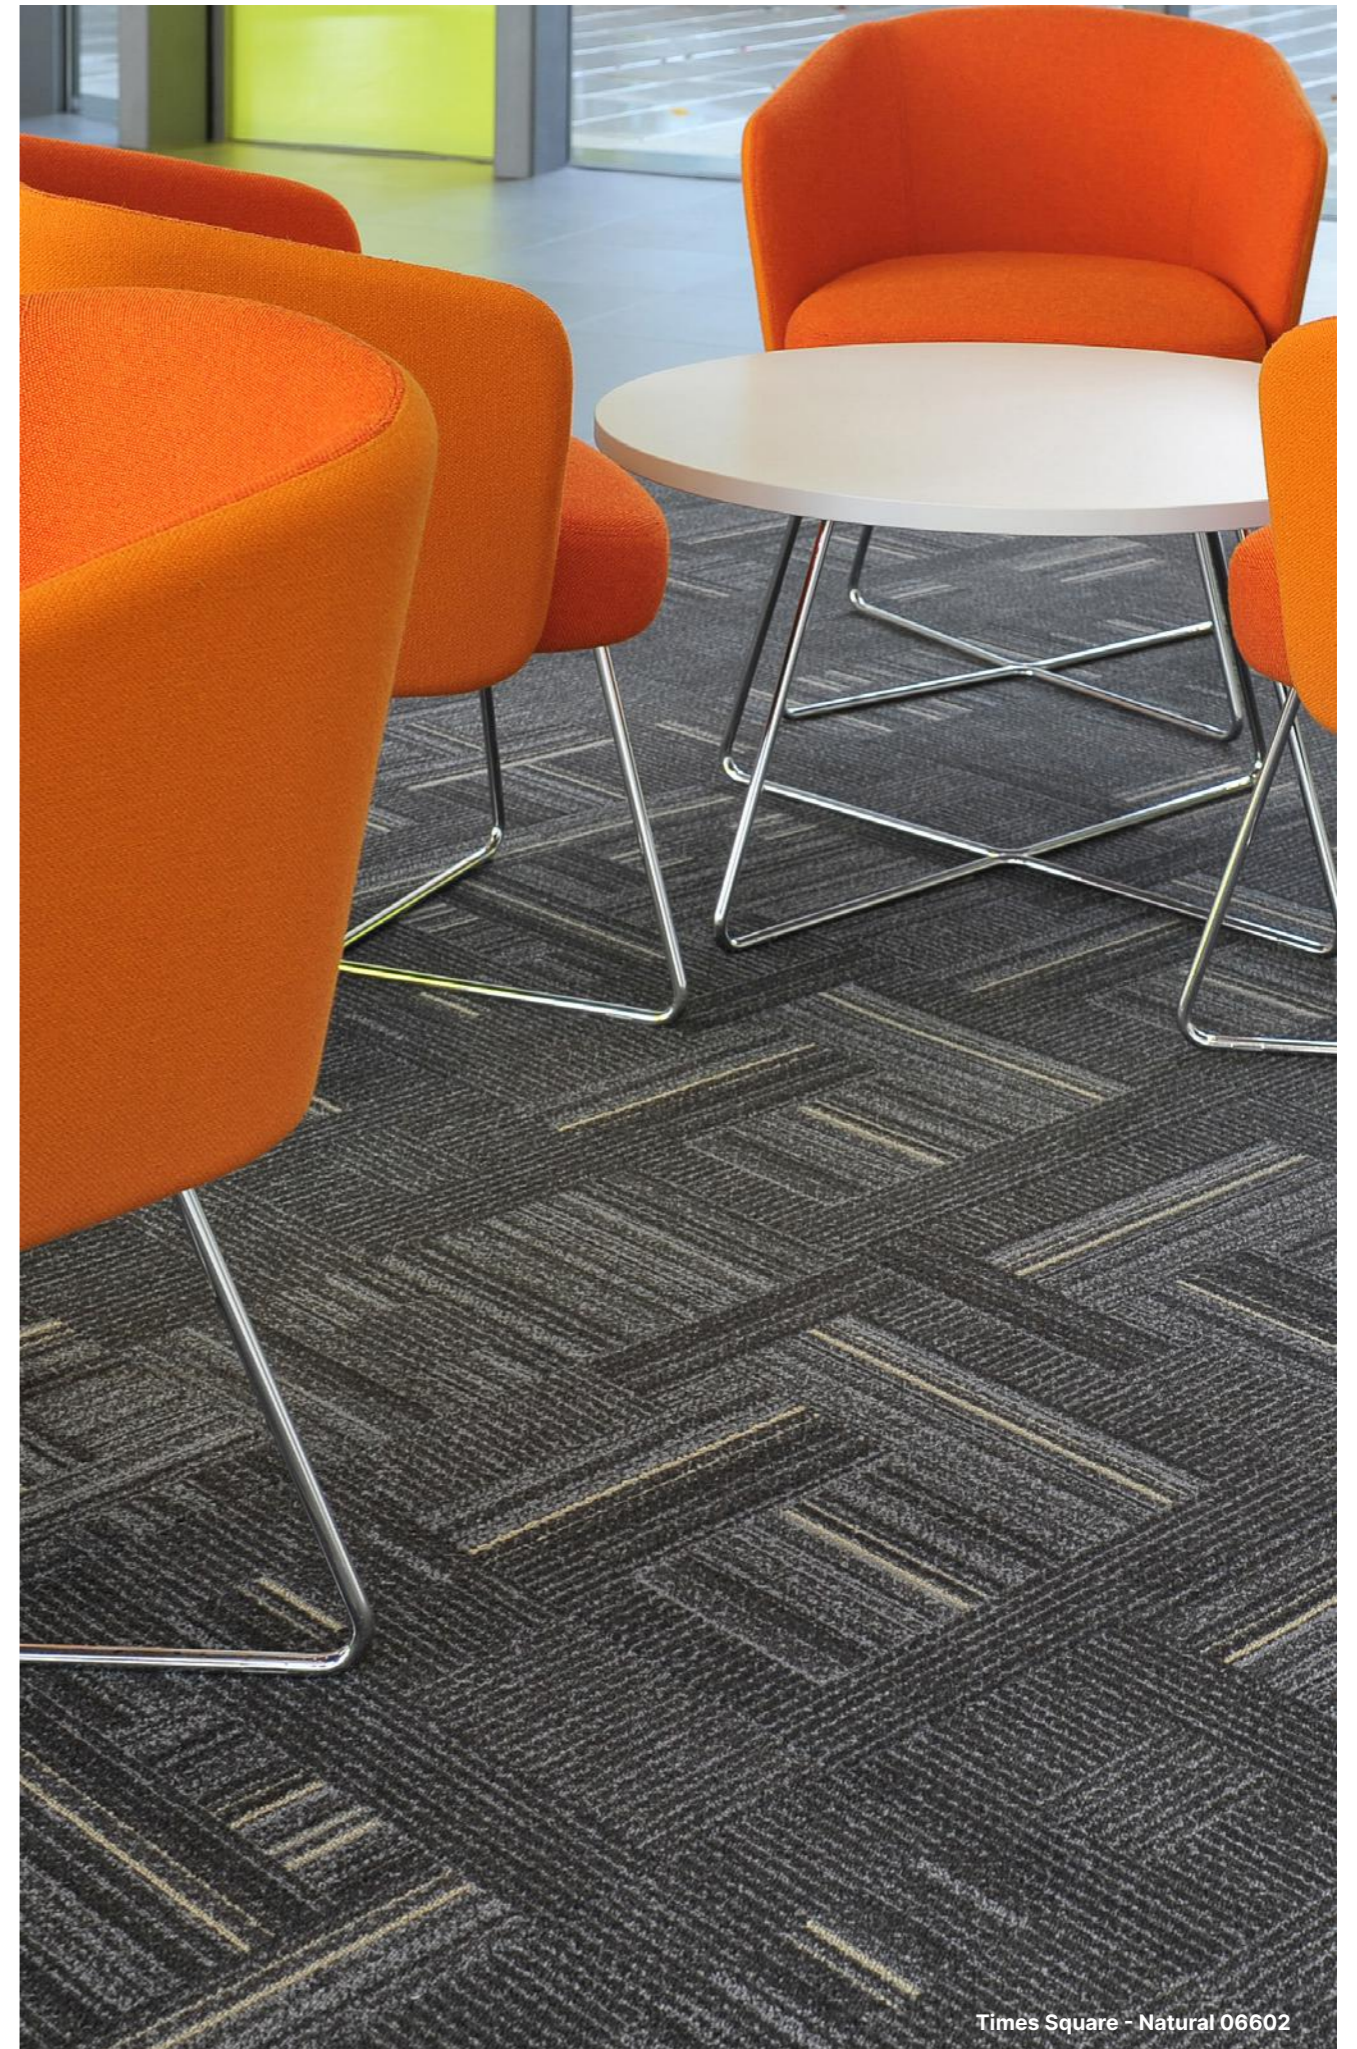

Times Square - Natural 06602

# Carezone

## Impervious Carpet

### Premium Collection

- > Suitable for care homes, care facilities and residential living
- > Colours can be combined to create a coordinated floor scheme
- > Contains BI-OME® Medical anti-microbial treatment
- > Easy to clean and maintain

#### Textured Loop

#### Cut Pile



Specification:	Textured Loop	Cut Pile
Product Dimensions	2 metres or 4 metres	2 metres or 4 metres
Product Construction	Tufted Loop Pile	Tufted Cut Pile
Surface Yarn	100% Polypropylene	100% Polypropylene
Total Carpet Weight	2850 g/m <sup>2</sup>	3125 g/m <sup>2</sup>
Tufted Pile Weight	960 g/m <sup>2</sup>	1050 g/m <sup>2</sup>
Primary Backing	Woven Polypropylene	Woven Polypropylene
Secondary Backing	Aquabac Impervious	Aquabac Impervious
Total Carpet Thickness	8.5mm	10mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)



The Dementia Services Development Centre at the University of Stirling have undertaken a review of the Carezone range and have rated its design in relation to dementia design principles and its usability within a dementia-inclusive environment.

All Carezone colours are rated as Class 1a and are suitable for use in dementia applications. For an environment to be considered 'dementia-inclusive' careful consideration must be given to the specification of adjacent finishes with a maximum contrast of 10 points LRV between adjacent floor surfaces.

Carezone - Natural Truffle Cut Pile 07103 shown with Tarasafe Impression


# SqMile Exec

## Carpet Tile


### Premium Collection

- > Suitable for commercial office environments
- > Colours can be combined to create a coordinated floor scheme
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Complements Creation 55 Loose Lay LVT

#### Plains




Bank 01313  
Y: 9.02




Euston 01314  
Y: 9.12

#### Stripes



Central Line 01355



Westminster 01315  
Y: 5.61



Farringdon 01310  
Y: 1.80



District Line 01366


Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Cut Pile
Surface Yarn	ECONYL® Regenerated SDN
Total Carpet Weight	5147 g/m <sup>2</sup>
Tufted Pile Weight	1100 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen (contains 75% recycled material)
Total Carpet Thickness	8.7mm
For full specification information visit <a href="http://www.gerflor.co.uk">www.gerflor.co.uk</a>	




Broadloom  
Plains



Quarter Turn  
Plains  
Stripes



Brick Bond  
Stripes

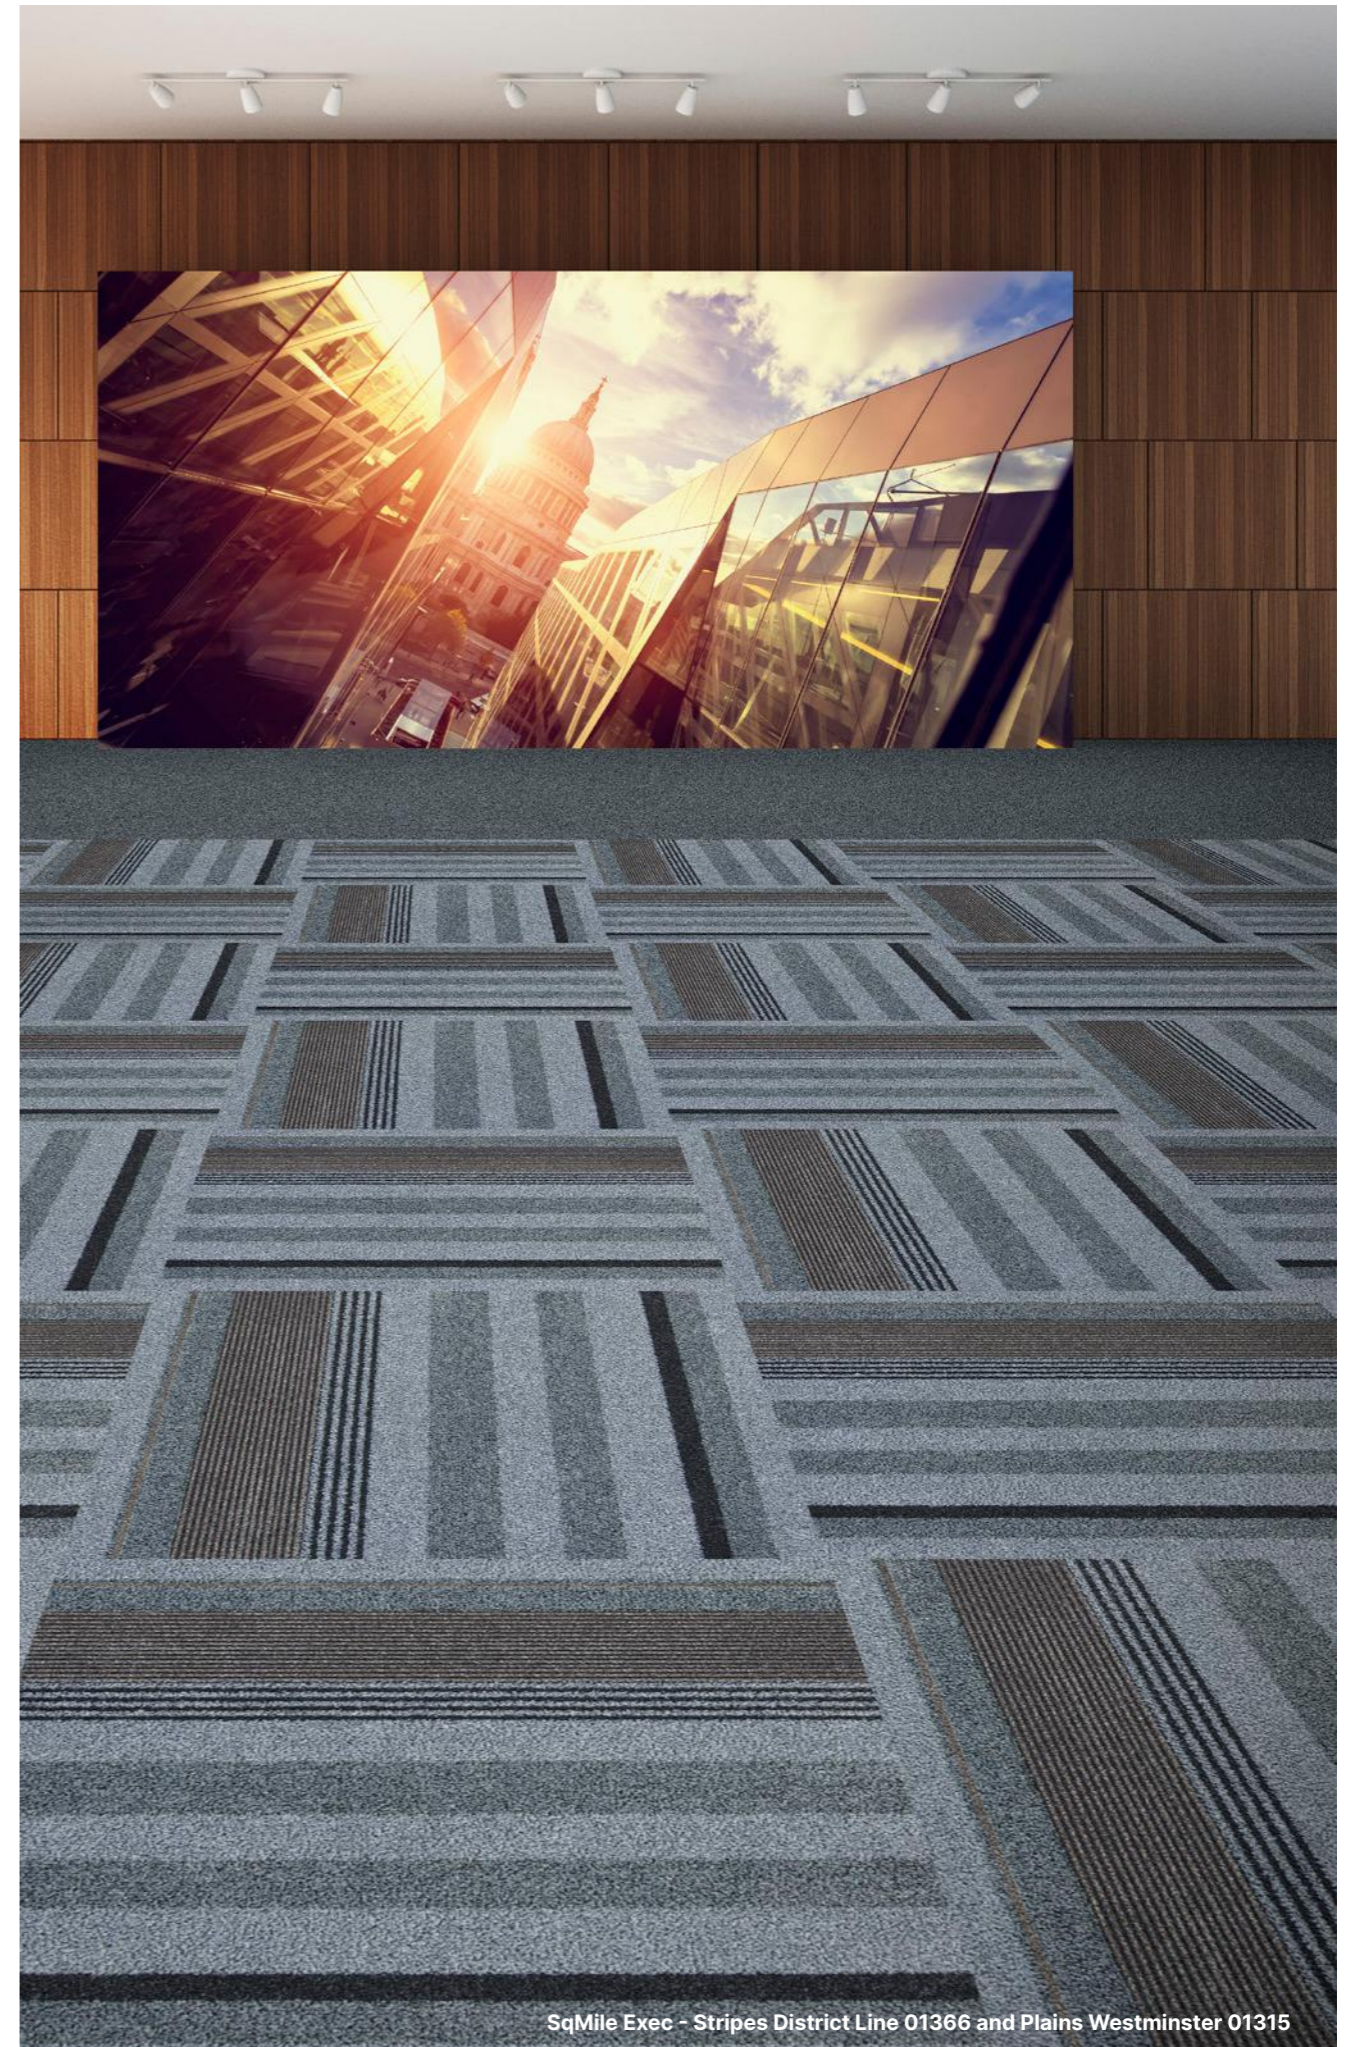

SqMile Exec - Stripes District Line 01366 and Plains Westminster 01315



# Adventurer

## Carpet Tile & Impervious




Premium Collection

- > Suitable for commercial office, education and healthcare environments
- > Combines style with outstanding performance
- > Ideal for heavy traffic environments
- > Seamless appearance when installed



Specification:	Tile	Pvc Impervious
Product Dimensions	500mm x 500mm	2 metres
Product Construction	Tufted Loop Pile	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon	100% Solution Dyed Nylon
Total Carpet Weight	4380 g/m <sup>2</sup>	4380 g/m <sup>2</sup>
Tufted Pile Weight	500 g/m <sup>2</sup>	500 g/m <sup>2</sup>
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen	pvc
Total Carpet Thickness	6.2mm	6.9mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)

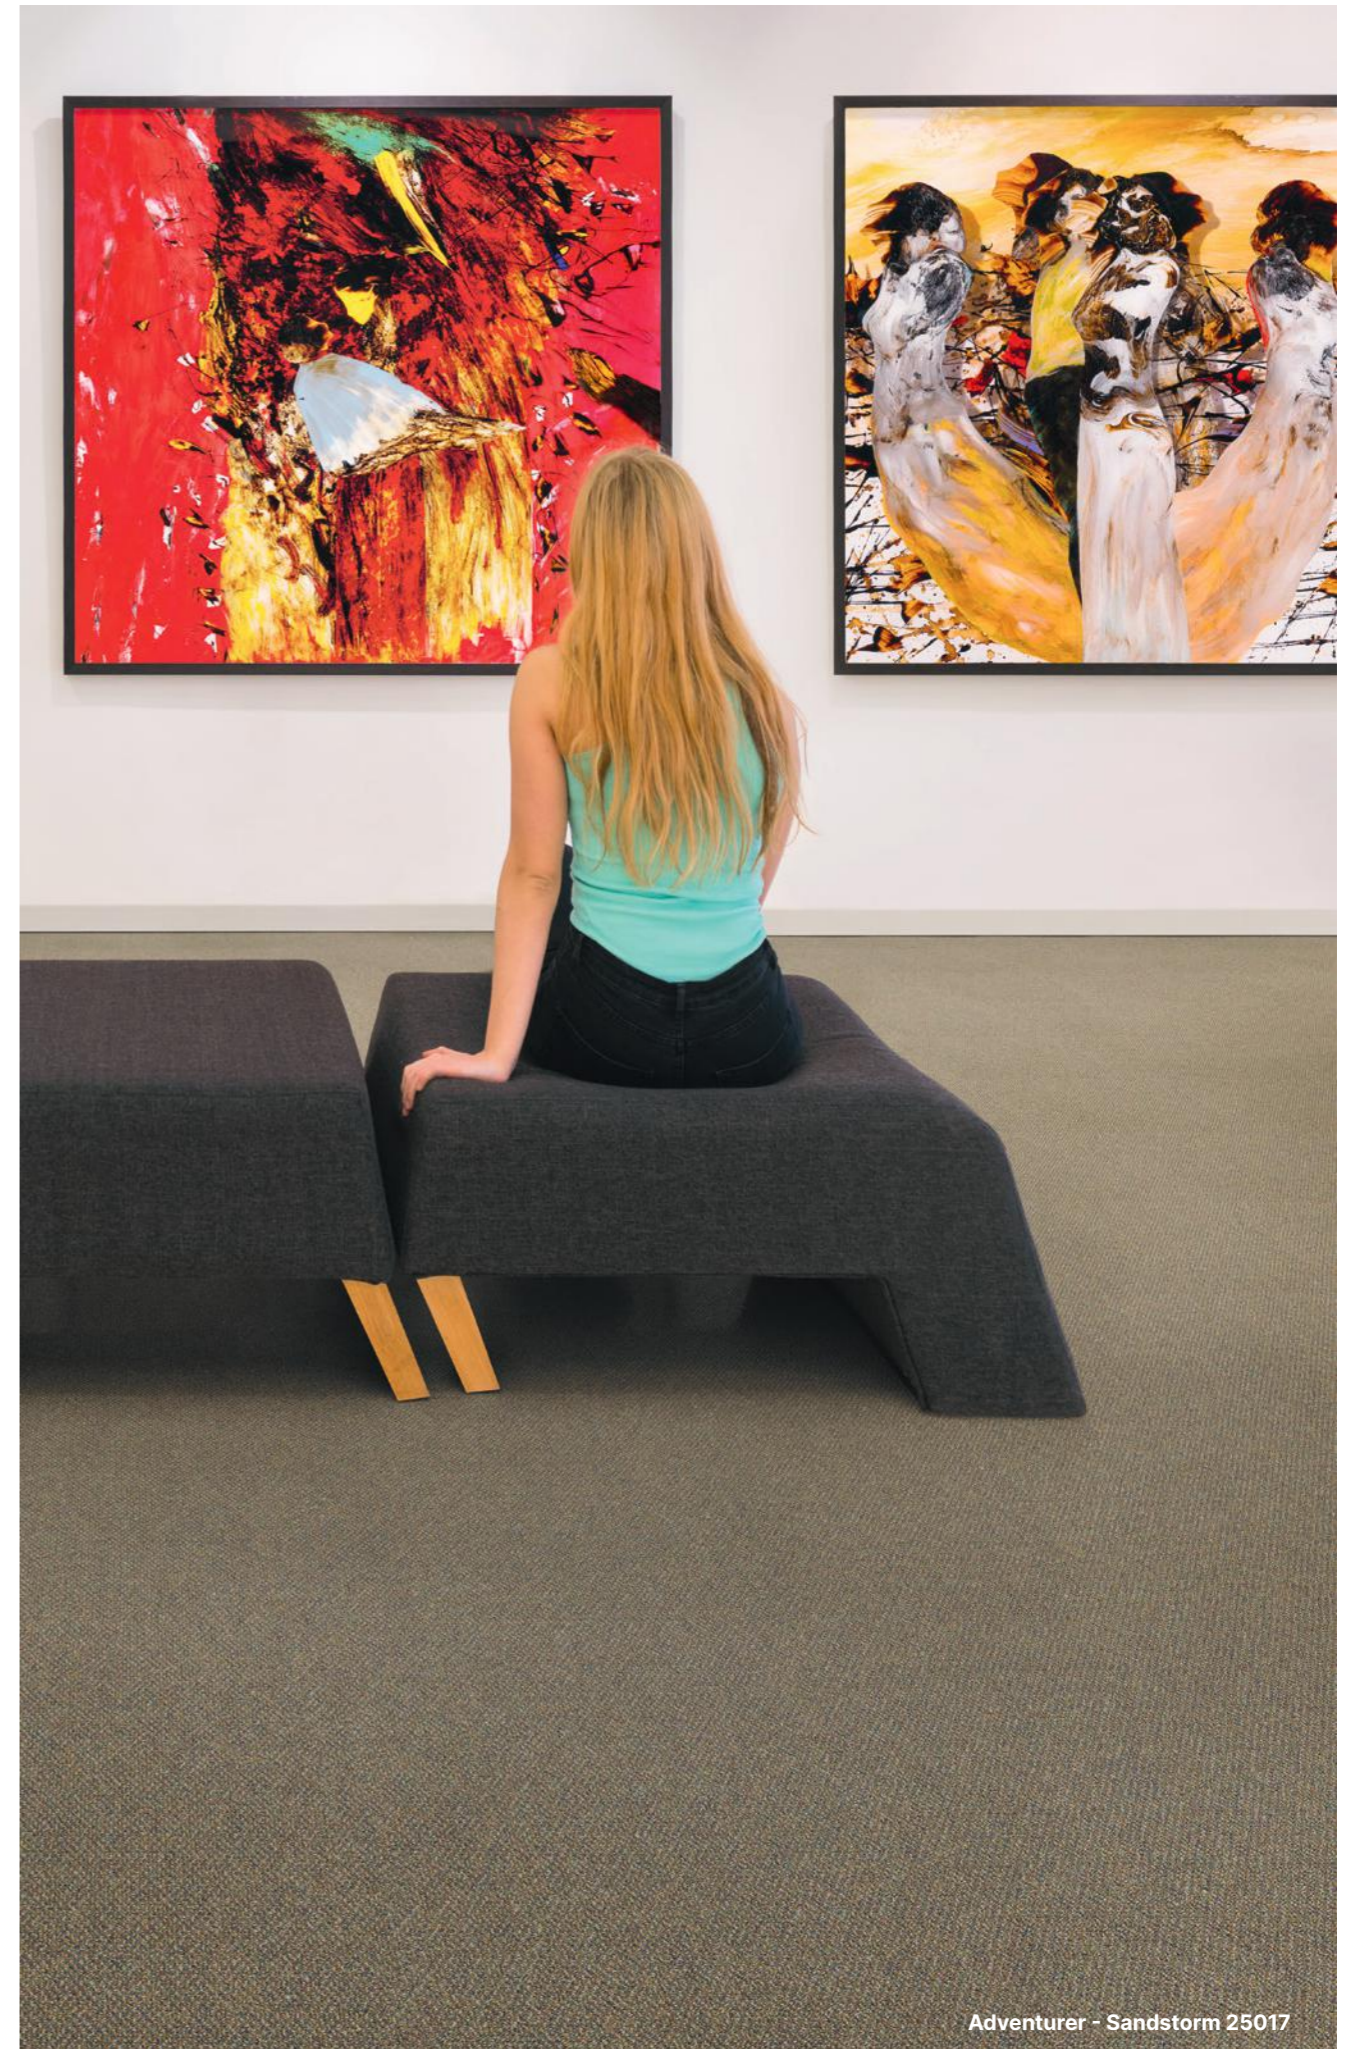

Adventurer - Sandstorm 25017


# Genus & Volnay

Carpet Tile, Broadloom & Impervious


Premium Collection

- > Suitable for commercial office, education and healthcare environments
- > Available in tile, broadloom and impervious formats
- > Excellent performance and ideal for heavy traffic environments
- > Easy to clean and maintain

## Genus

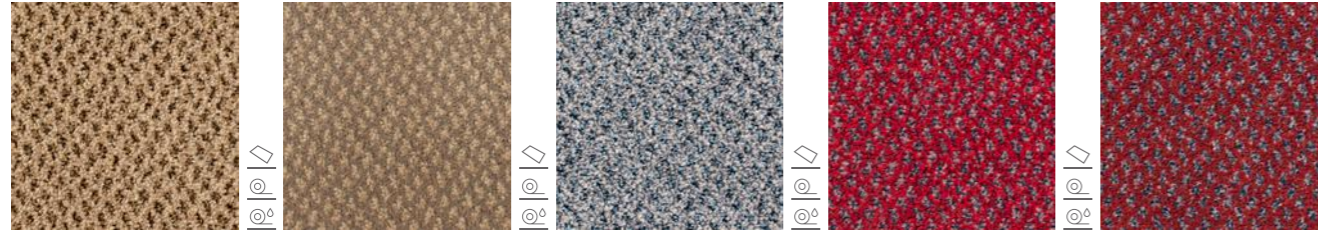


Cornfield 00225 Y: 17.44    Beachwood 00245 Y: 11.76    Black Forest 00209 Y: 12.15    Rich Red 00220 Y: 4.45    Ancient Ruby 00235 Y: 3.65

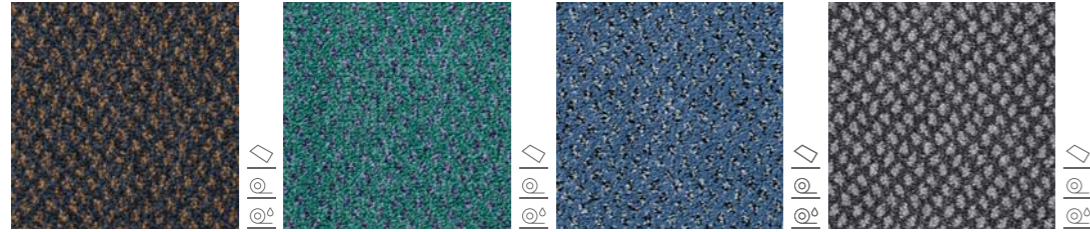

Graphite Storm 00239 Y: 5.43    Thistle 00215 Y: 6.53    Winter Fjord 00216 Y: 5.46    Silver Birch 00246 Y: 6.63



## Volnay

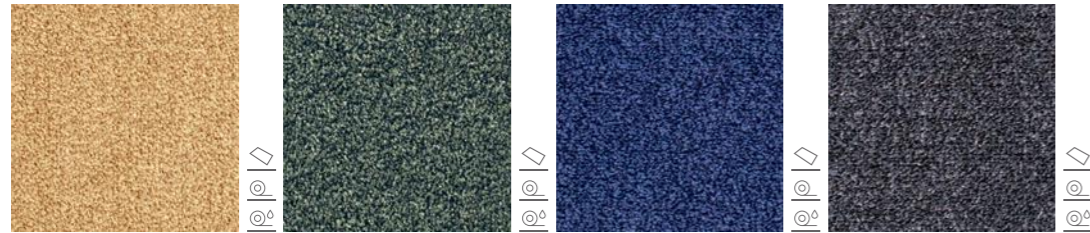

Natural Straw 00318 Y: 21.68    Camouflage 00314 Y: 5.26    Azurite Blue 00322 Y: 2.84    Charcoal 00324 Y: 2.75

Specification:	Tile	Broadloom	Pvc Impervious
Product Dimensions	500mm x 500mm	4 metres	2 metres
Product Construction	Tufted Cut Pile	Tufted Cut Pile	Tufted Cut Pile
Surface Yarn	100% Marquésa SD	100% Marquésa SD	100% Marquésa SD
Total Carpet Weight	4375 g/m <sup>2</sup>	2366 g/m <sup>2</sup>	4605 g/m <sup>2</sup>
Tufted Pile Weight	1085 g/m <sup>2</sup>	1085 g/m <sup>2</sup>	1085 g/m <sup>2</sup>
Primary Backing	Non-woven	Woven Polypropylene	Non-woven
Secondary Backing	Bitumen	Woven Polypropylene	pvc
Total Carpet Thickness	9mm	8mm	8mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)



Genus - Graphite Storm 00239, Volnay - Charcoal 00324

# Stratus

## Carpet Tile

### Premium Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Complements Streetwise Design




Storm Surge 06504



Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	ECONYL® Regenerated SDN
Total Carpet Weight	4585 g/m <sup>2</sup>
Tufted Pile Weight	615 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen (contains 75% recycled material)
Total Carpet Thickness	6.8mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)




# Emphasis

## Carpet Tile

### Premium Collection

- > Suitable for commercial office and education environments
- > A range of feature colours to complement other carpet ranges
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Complements Urban Myth, Streetwise Design, Cityscene & Brickworks and Lafite Connect

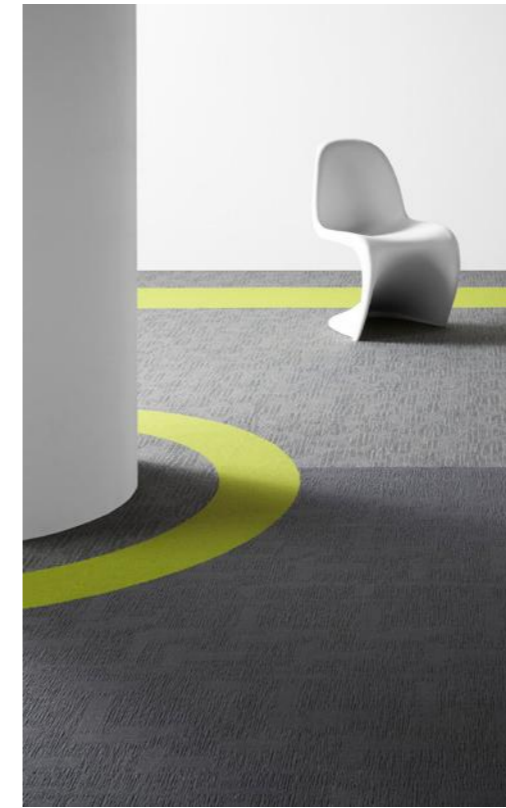


Emphasis - Green 104 with Cityscene - Shale 06106 and Brickworks - Tonbridge 06711



Emphasis should only be used as an accent colour to complement other product ranges. Emphasis should not be used as a field colour or in areas of heavy traffic such as doorway thresholds.

Specification:	Loop Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	ECONYL® Regenerated SDN
Total Carpet Weight	4200 g/m <sup>2</sup>
Tufted Pile Weight	615 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	6.8mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)




# Latour<sup>2</sup> Carpet Tile


## High Performance Contractor Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Constructed from 100% Aquafil Solution Dyed Nylon yarn
- > Excellent performance and ideal for heavy traffic environments

### Plains



Glenavon 07143  
Y: 6.07



Coniston 00243  
Y: 6.51



Cheviot 01043  
Y: 4.47



Ravenstone 02243  
Y: 16.37



Morden 00300  
Y: 10.58




Glandford 05043  
Y: 5.90




Wansdyke 00143  
Y: 4.12



Torridon 09143  
Y: 5.76




Langdale 01143  
Y: 8.51



Stanage 00900  
Y: 8.95



Howden 01243  
Y: 12.55



Arfon 04043  
Y: 8.52



Scafell 05143  
Y: 7.30



Staffin 00400  
Y: 7.36



Dovedale 06043  
Y: 6.33



Cairngorm 04143  
Y: 3.50



Stanton 08943  
Y: 10.04



Alston 00500  
Y: 8.17

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Aquafil Solution Dyed Nylon
Total Carpet Weight	4320 g/m <sup>2</sup>
Tufted Pile Weight	470 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen (contains 75% recycled material)
Total Carpet Thickness	5.5mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)




Broadloom  
Plains



Quarter Turn  
Plains  
Stripes

### Stripes

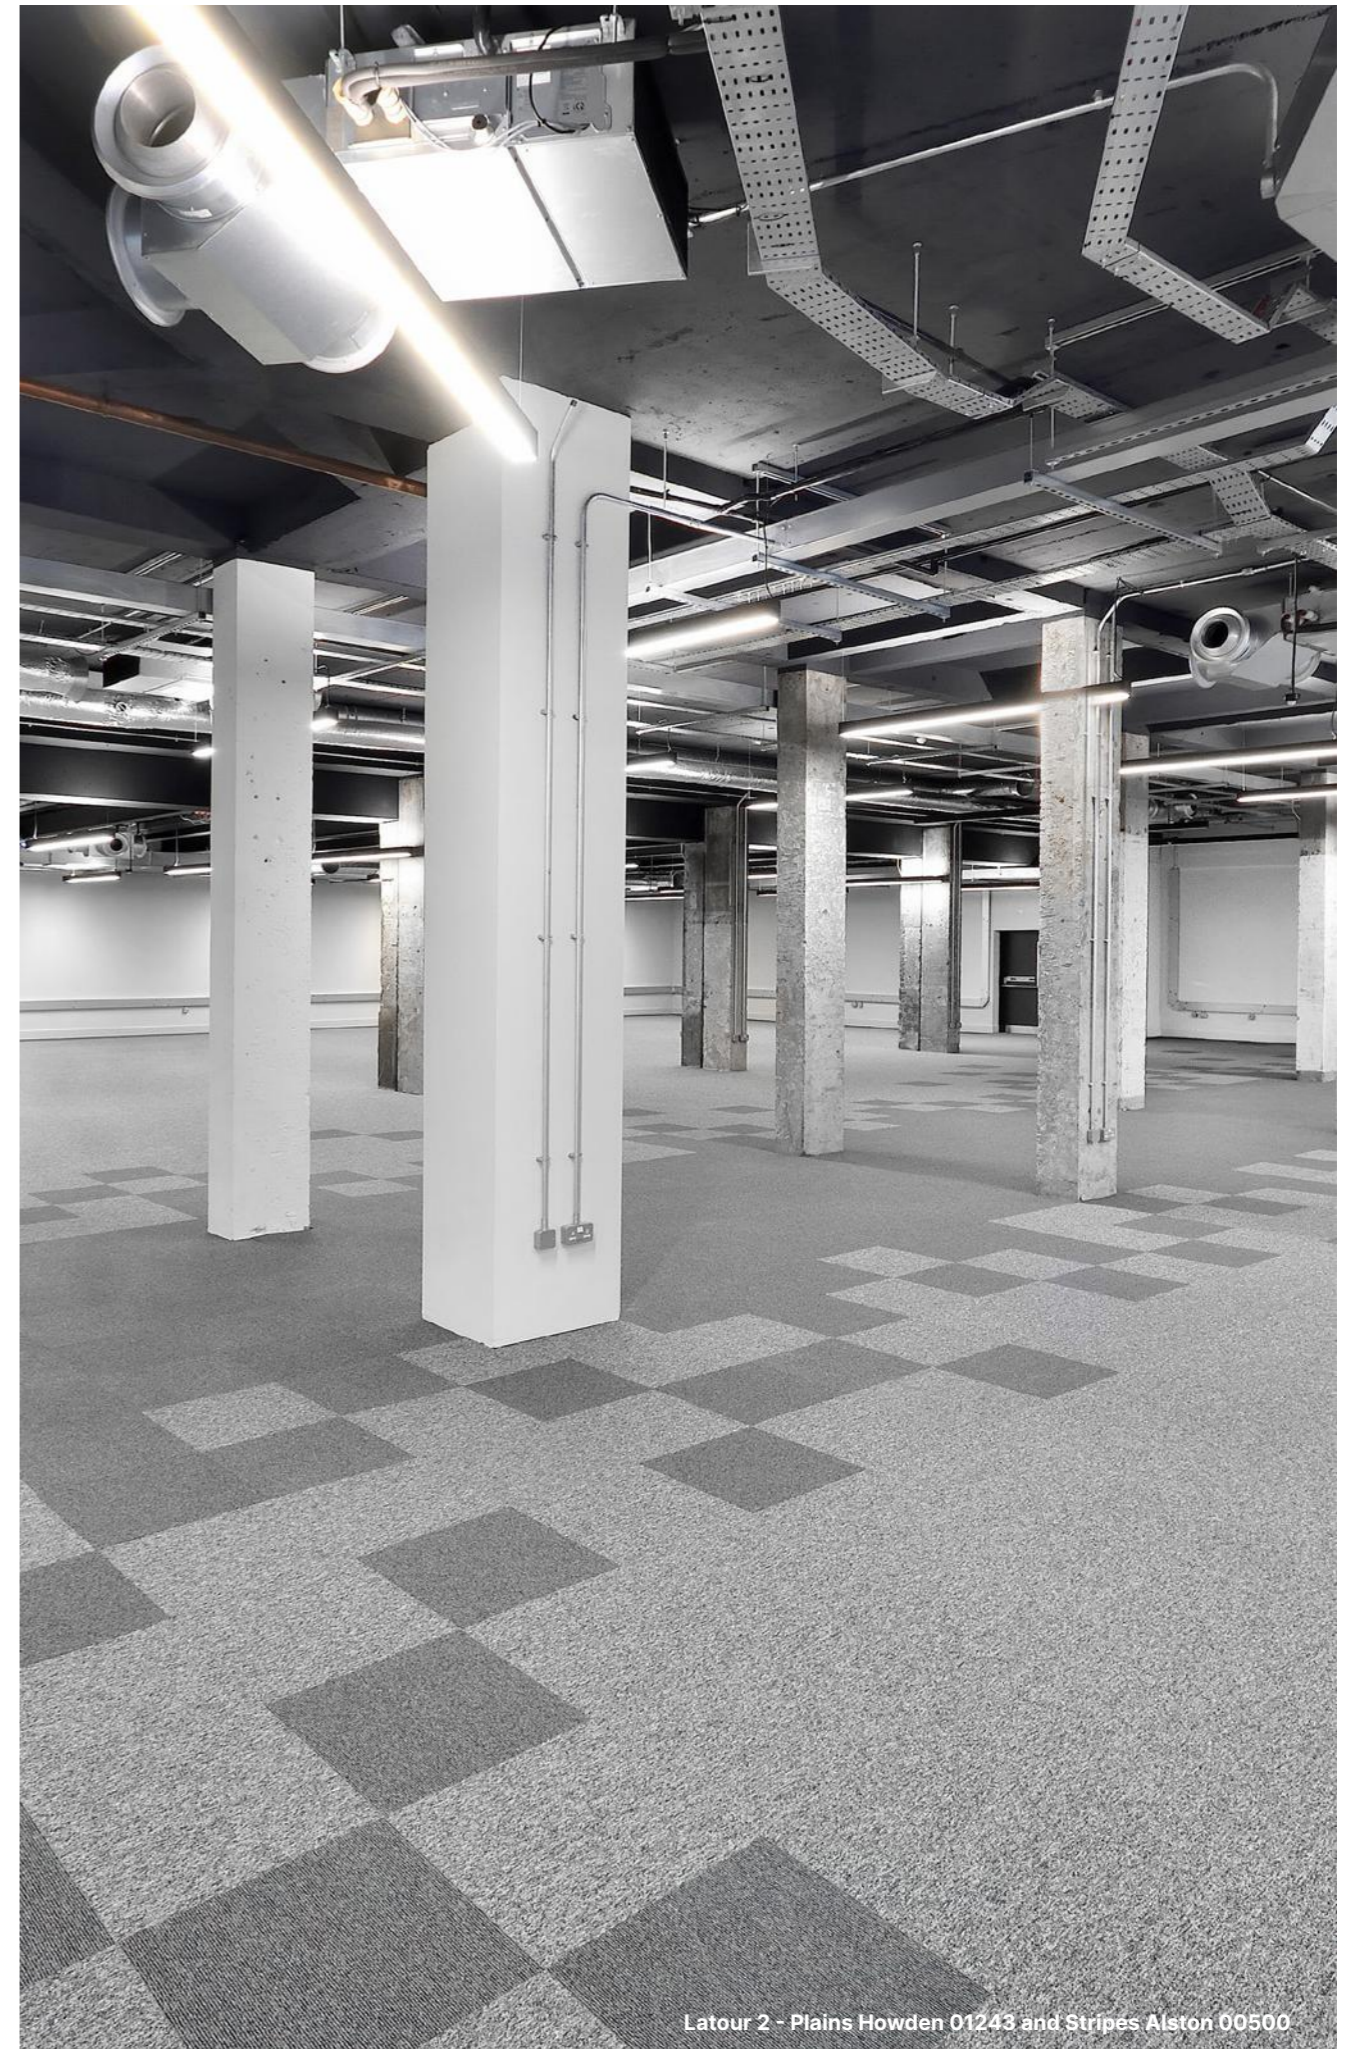

Latour 2 - Plains Howden 01243 and Stripes Alston 00500


# Lafite Connect

## Carpet Tile


## High Performance Contractor Collection

- > Suitable for commercial office and education environments
- > Fusion tiles create a seamless transition feature across areas of your room such as walkways and seating plans
- > Ideal for creating zones, feature areas and transitions across the floor
- > Complements Lafite Space

### Fusion

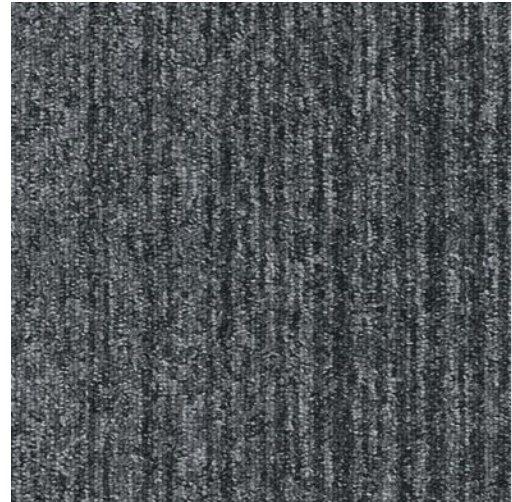

LCFUSION34  
Y: 8.49

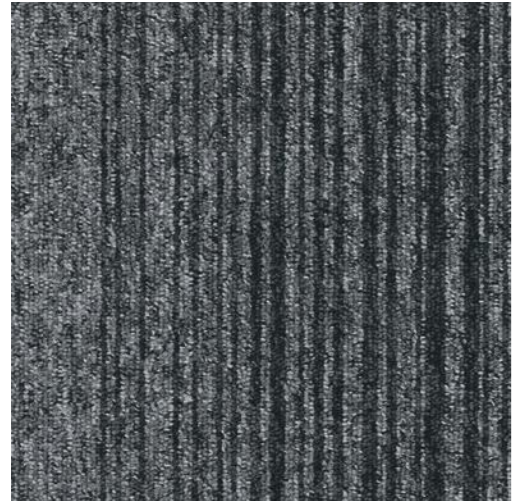


LCFUSION35  
Y: 7.18


### Plains




LC9  
Y: 13.72



LC11  
Y: 7.20



LC9  
Y: 13.72



LC12  
Y: 3.55

Specification:	Fusion & Plains
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Aquafil Solution Dyed Nylon
Total Carpet Weight	4415 g/m <sup>2</sup>
Tufted Pile Weight	540 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	5.9mm



For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)



Brick Bond  
Fusion  
Plains



Broadloom  
Plains

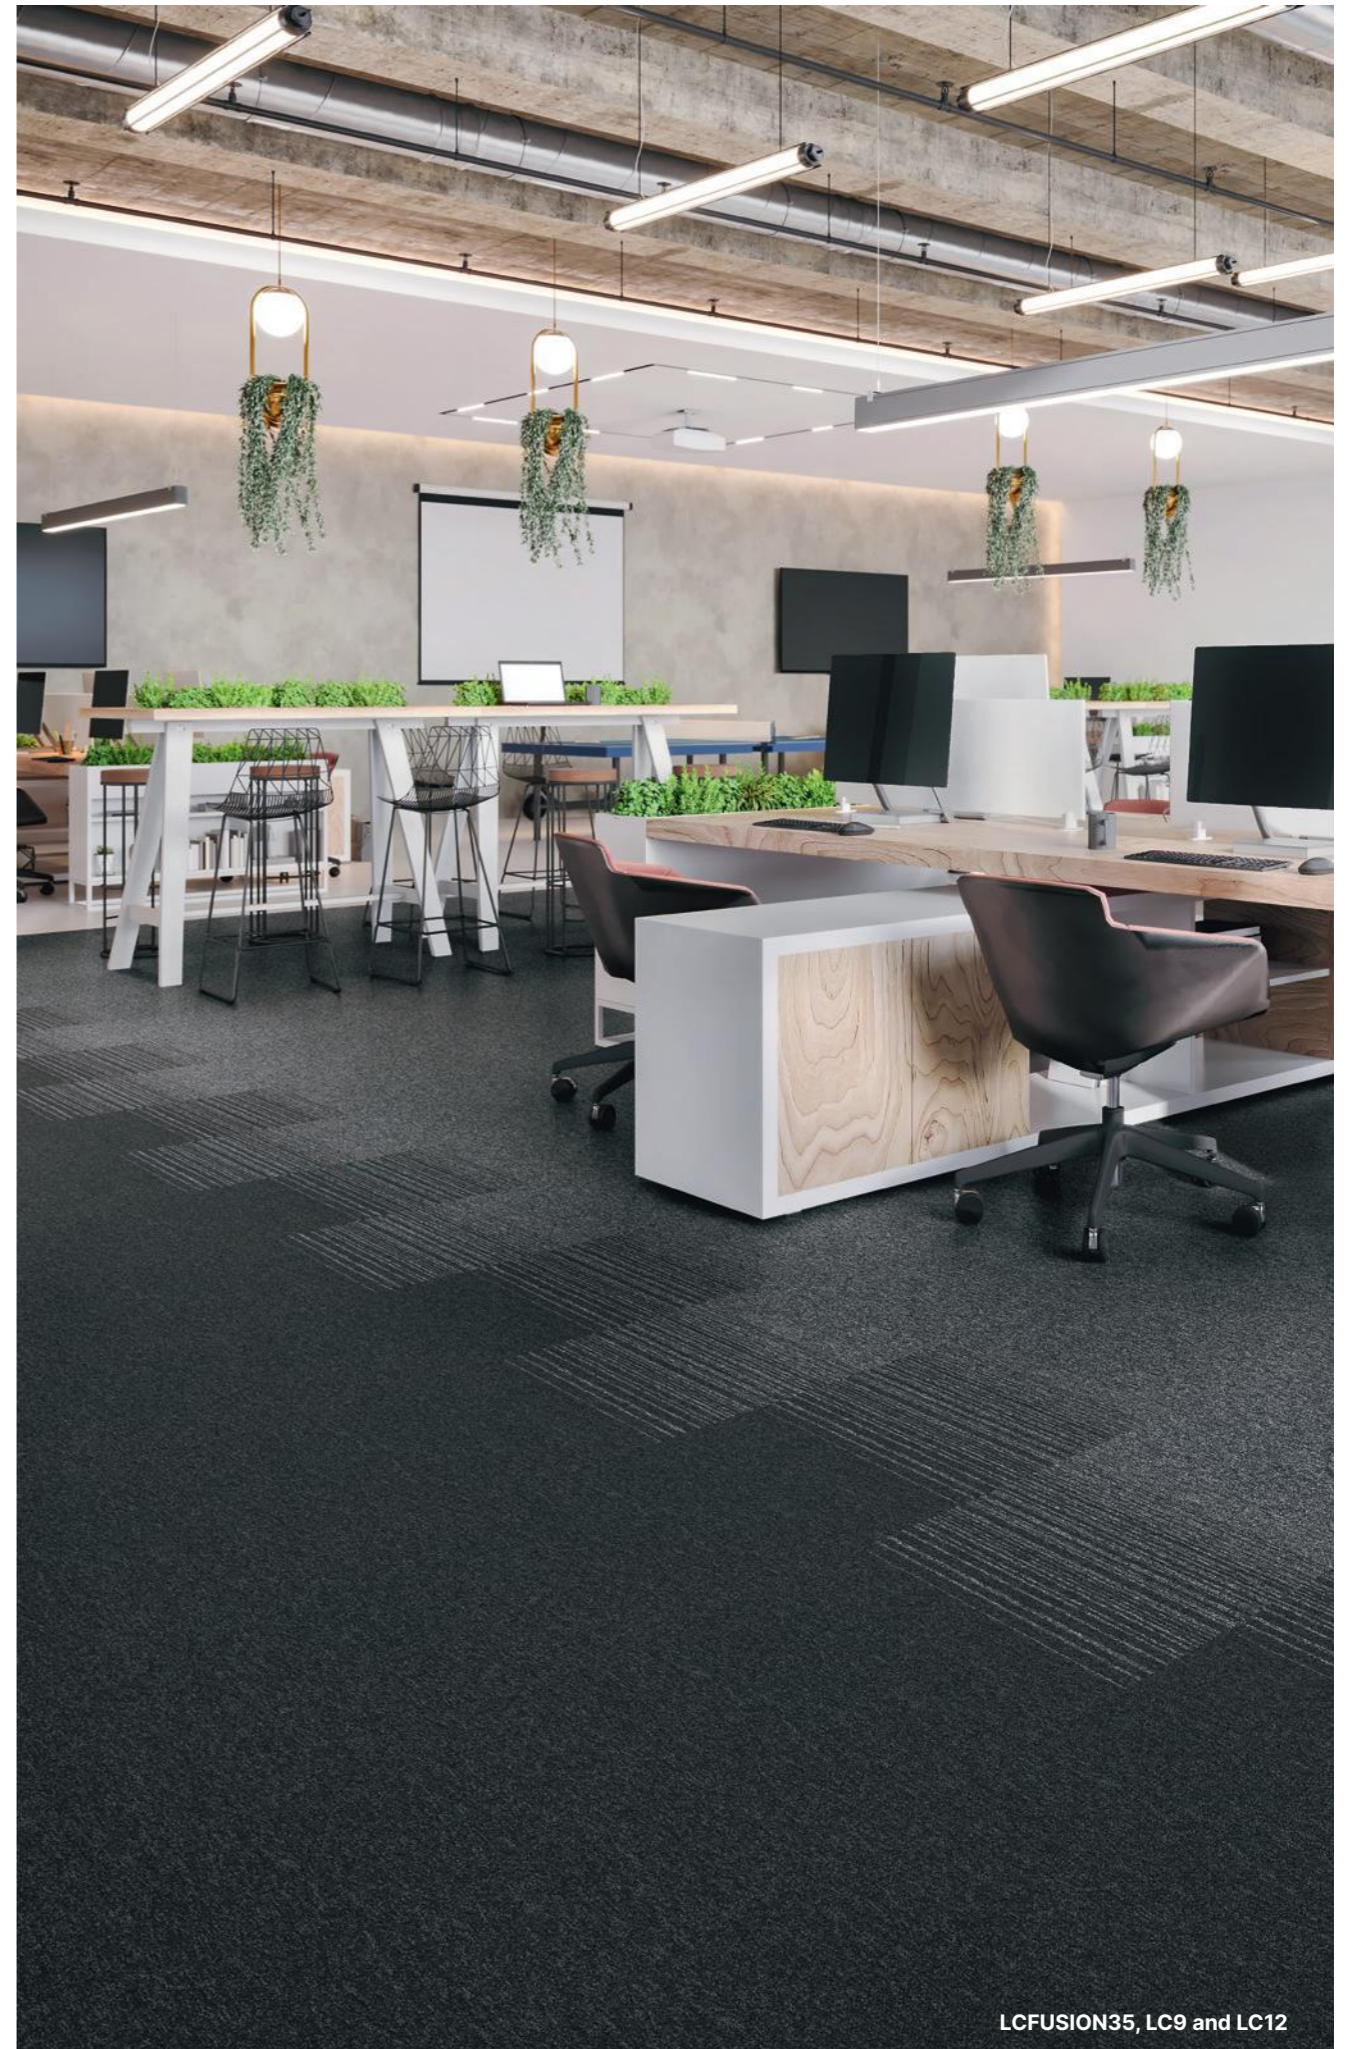

LCFUSION35, LC9 and LC12


# Lafite Connect

## Carpet Tile


### High Performance Contractor Collection

- > Suitable for commercial office and education environments
- > Fusion tiles create a seamless transition feature across areas of your room such as walkways and seating plans
- > Ideal for creating zones, feature areas and transitions across the floor
- > Complements Lafite Space

#### Plains

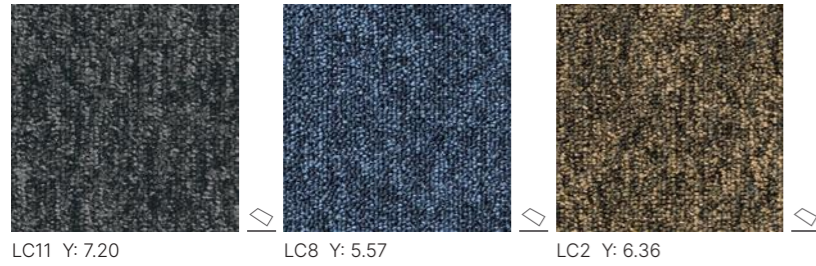


#### Stripes

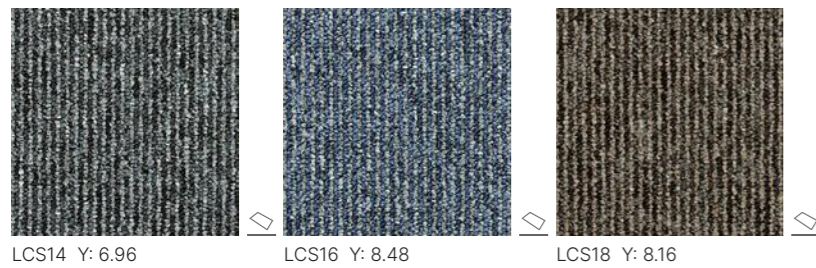

Specification:	Plains & Stripes
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Aquafil Solution Dyed Nylon
Total Carpet Weight	4415 g/m <sup>2</sup>
Tufted Pile Weight	540 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	5.9mm


For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)

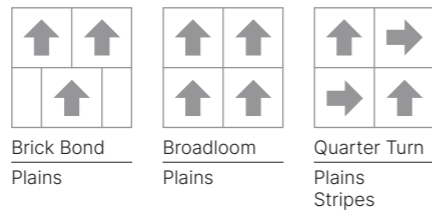

Y = Light Reflectance Value (LRV)



Plains and Stripes can be used to define spaces by connecting tones and colours to create a contrast between areas of your floor

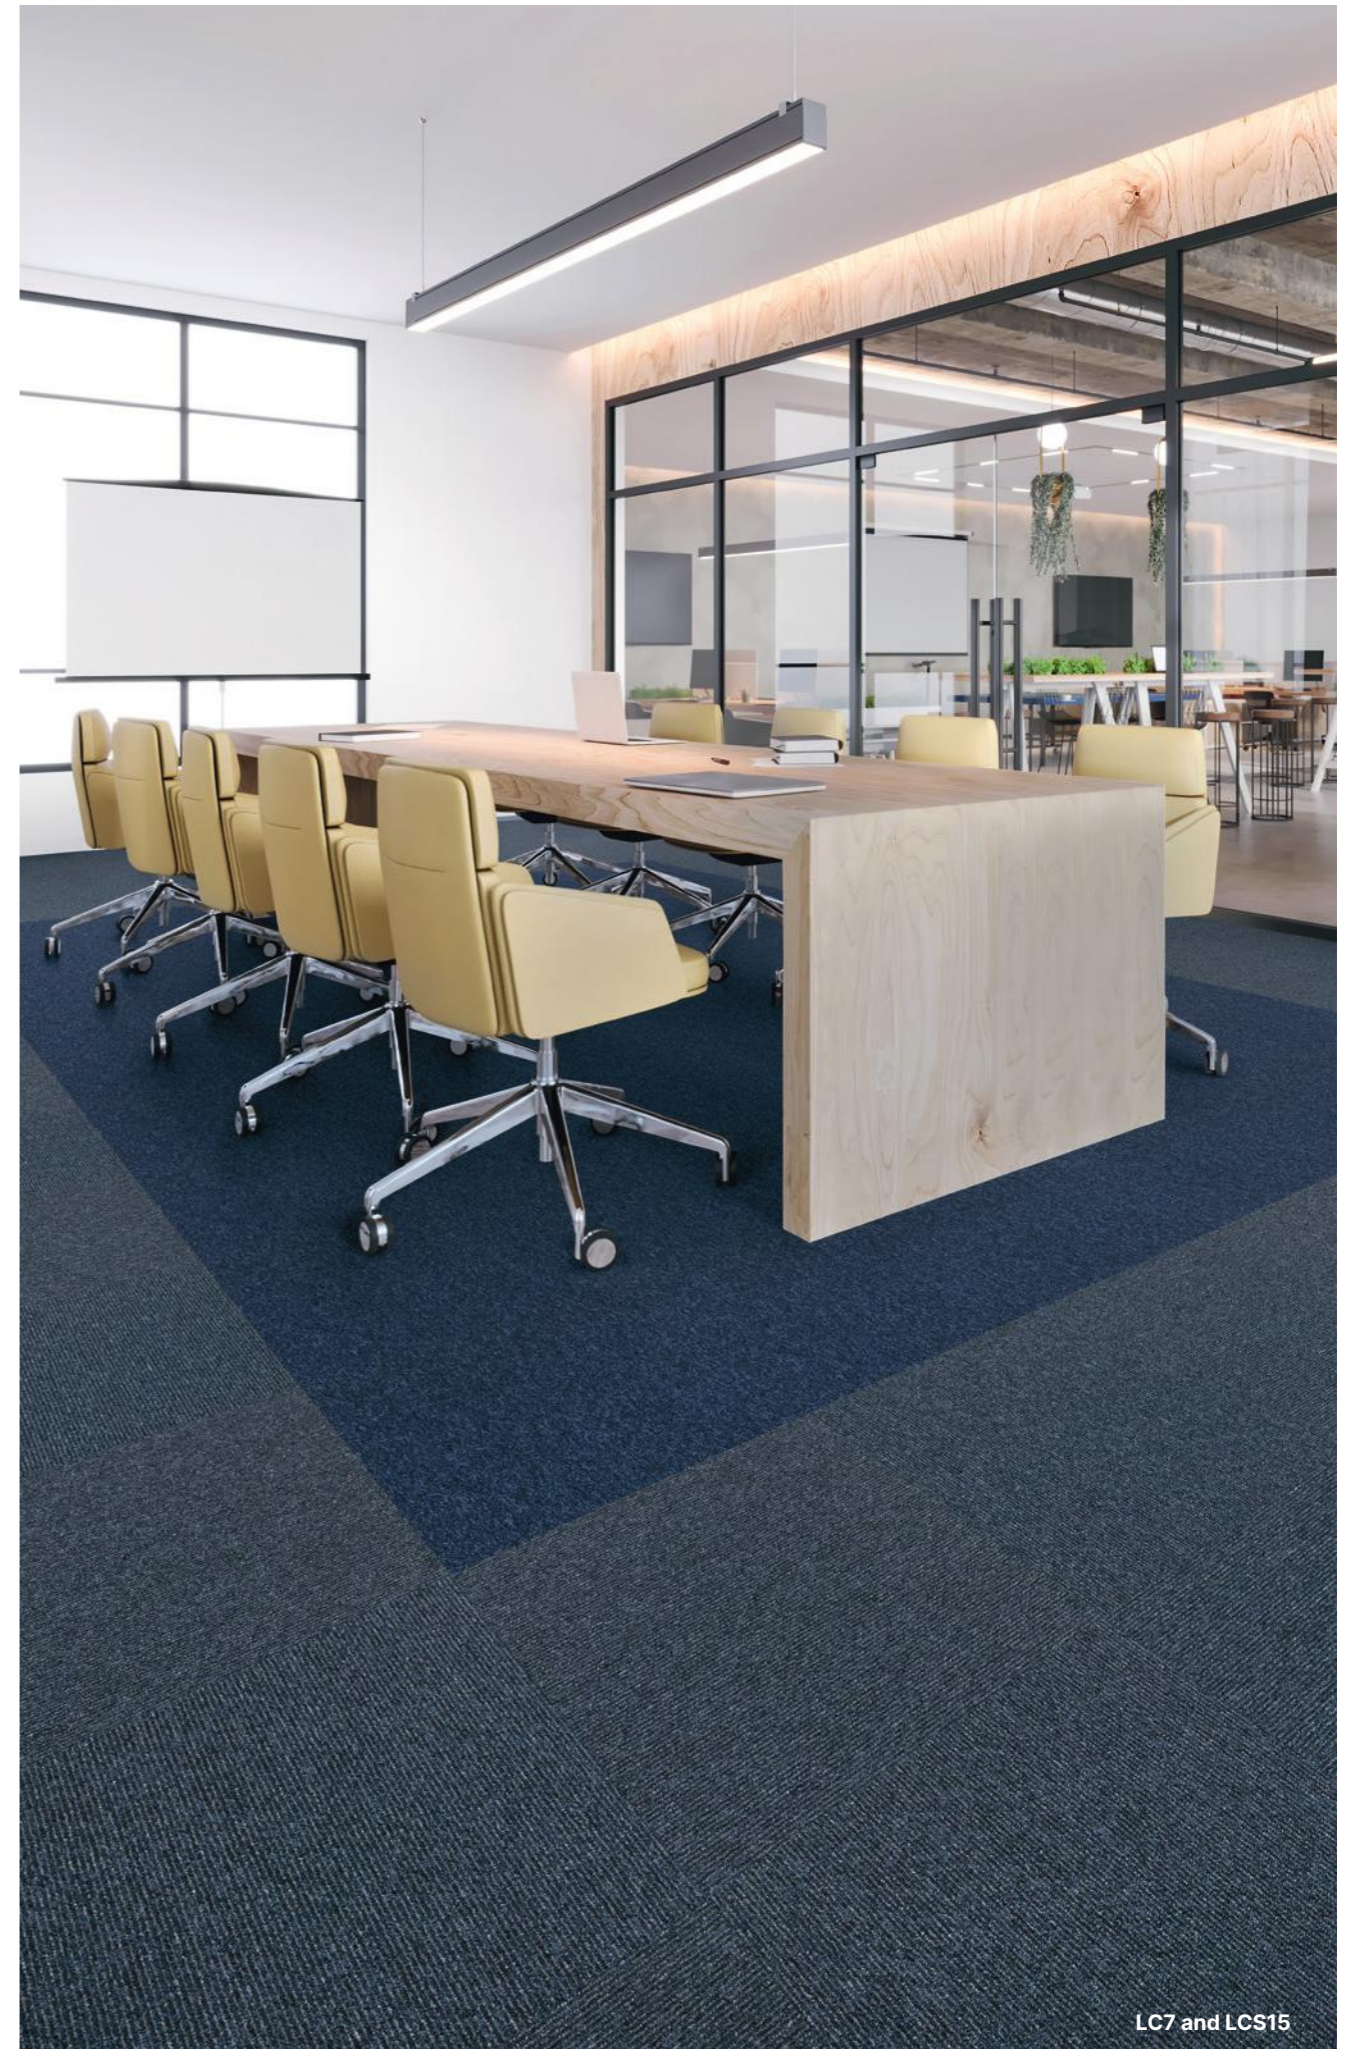

LC7 and LCS15

# Lafite Space

## Carpet Tile & Plank


High Performance  
Contractor Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating zones and transitions across the floor
- > Complements Lafite Connect

### Tile






### Plank

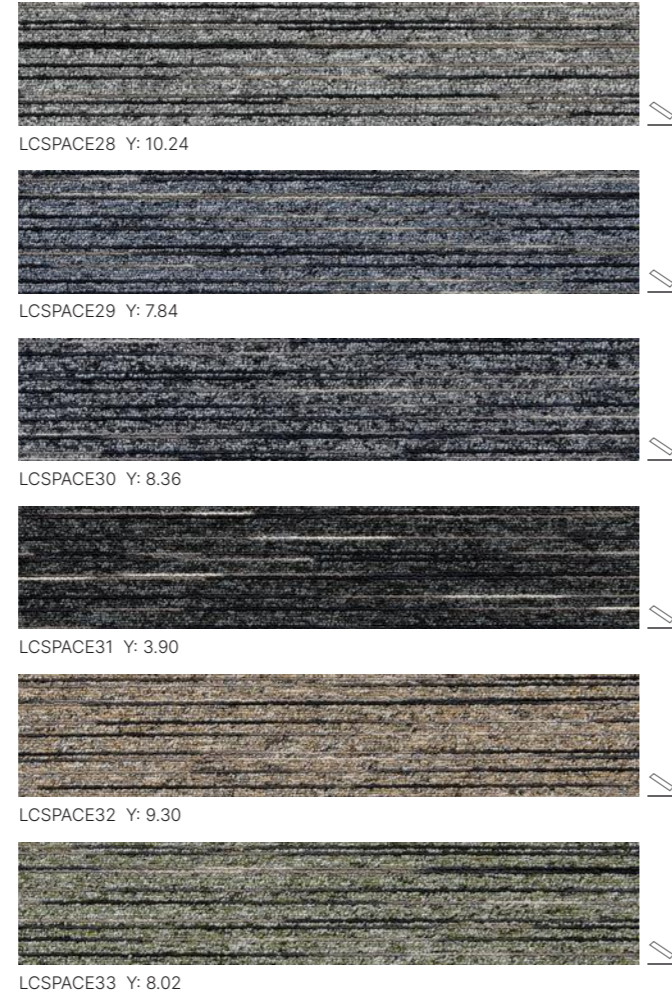

Specification:	Tile	Plank
Product Dimensions	500mm x 500mm	250mm x 1000mm
Product Construction	Tufted Loop Pile	Tufted Loop Pile
Surface Yarn	Solution Dyed Nylon & Space Dyed Nylon	Solution Dyed Nylon & Space Dyed Nylon
Total Carpet Weight	4415 g/m <sup>2</sup>	4415 g/m <sup>2</sup>
Tufted Pile Weight	540 g/m <sup>2</sup>	540 g/m <sup>2</sup>
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen	Bitumen
Total Carpet Thickness	5.9mm	5.9mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)

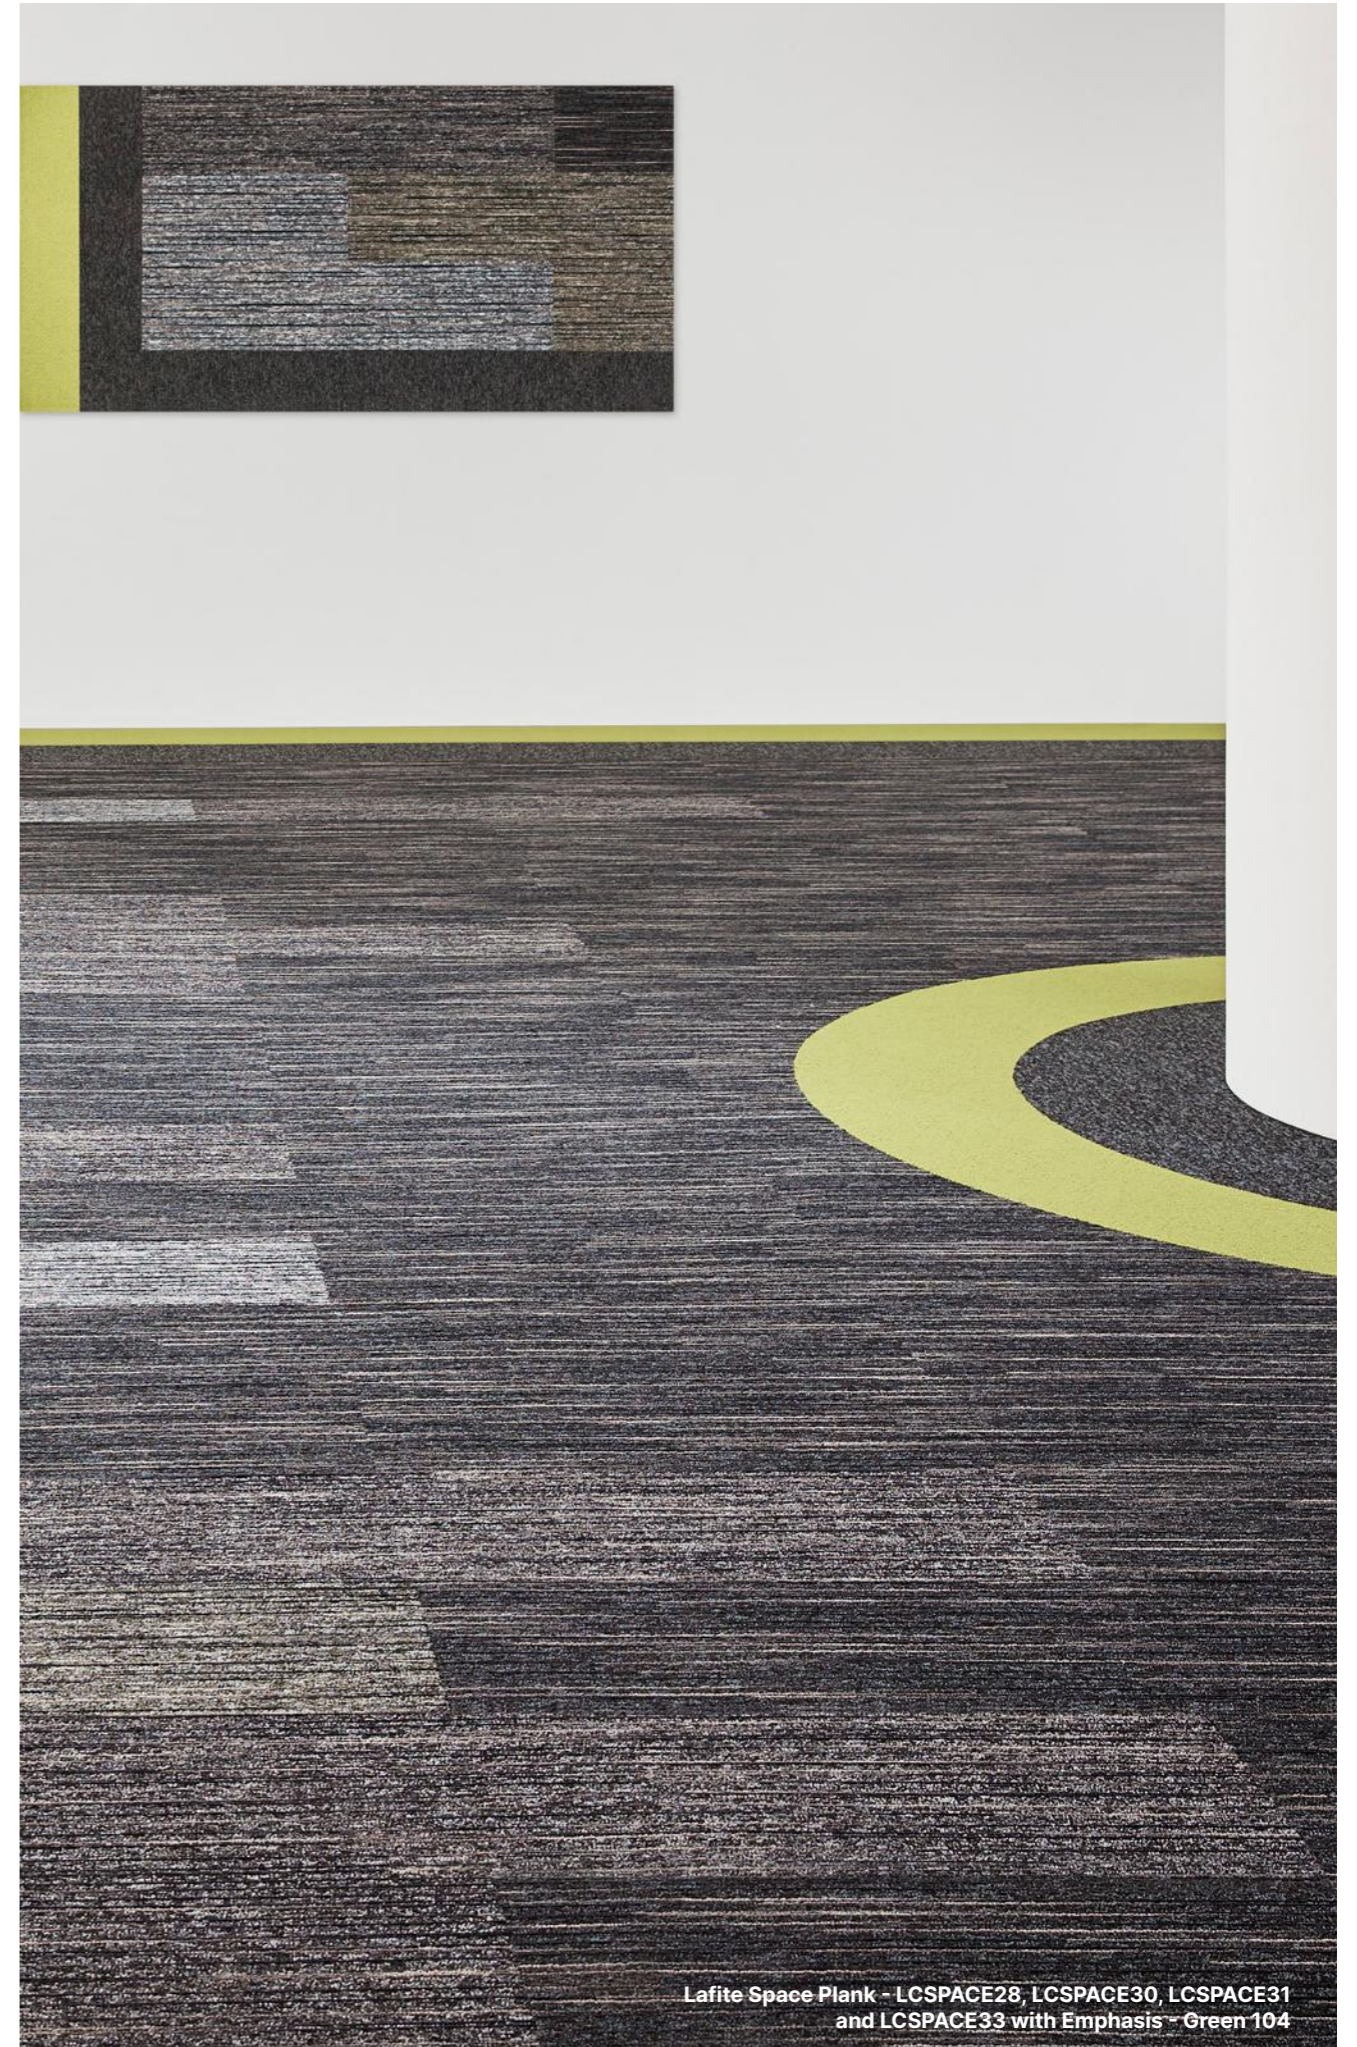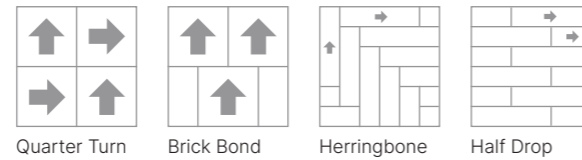

Lafite Space Plank - LCSPACE28, LCSPACE30, LCSPACE31 and LCSPACE33 with Emphasis - Green 104

# Lafite Plains

## Carpet Tile

High Performance Contractor Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating zones, feature areas and transitions across the floor
- > Complements Lafite Space





Lafite Plains - LC5 with LC9



Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Aquafil Solution Dyed Nylon
Total Carpet Weight	4415 g/m <sup>2</sup>
Tufted Pile Weight	540 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	5.9mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)




# Predator

## Carpet Tile

High Performance Contractor Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Excellent performance and ideal for heavy traffic environments
- > Seamless appearance when installed


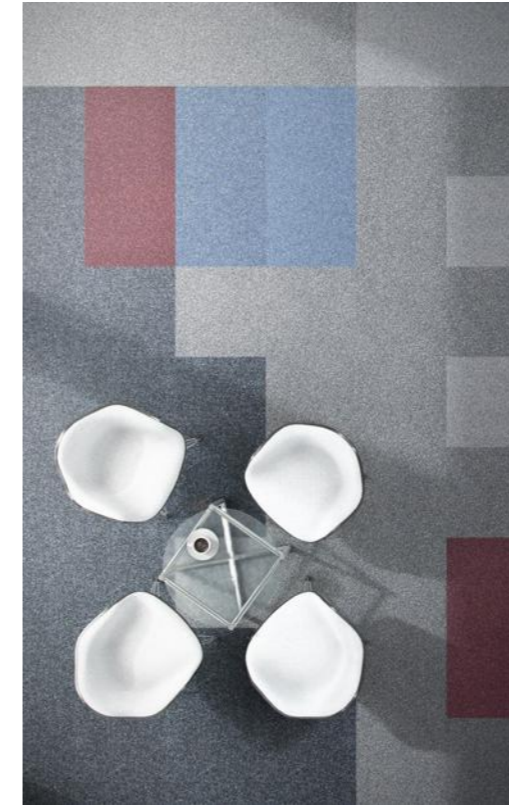


Predator - Osprey 03324, Hawk 03316, Lynx 03322, Piranha 03320



Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	ECONYL® Regenerated SDN
Total Carpet Weight	4400 g/m <sup>2</sup>
Tufted Pile Weight	525 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	Bitumen (contains 75% recycled material)
Total Carpet Thickness	6.5mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)





# Bodega

## Carpet Tile & Broadloom

### High Performance Contractor Collection

- > Suitable for commercial office, education and healthcare environments
- > Available in tile and broadloom formats
- > Excellent performance and ideal for circulation areas
- > Easy to clean and maintain





Bodega - Marine Blue 03823 with Mermaid 03812



Specification:	Tile	Broadloom
Product Dimensions	500mm x 500mm	4 metres
Product Construction	Tufted Loop Pile	Tufted Loop Pile
Surface Yarn	100% Polypropylene	100% Polypropylene
Total Carpet Weight	4500 g/m <sup>2</sup>	1906 g/m <sup>2</sup>
Tufted Pile Weight	678 g/m <sup>2</sup>	678 g/m <sup>2</sup>
Primary Backing	Non-woven	Woven Polypropylene
Secondary Backing	Bitumen	Woven Polypropylene
Total Carpet Thickness	6mm	6mm

For full specification information visit [www.gerflor.co.uk](http://www.gerflor.co.uk)



# Boulevard 7000


## Matting

### Secondary Barrier Matting

- > Suitable for commercial office, education and healthcare environments
- > Constructed from 100% Solution Dyed Nylon yarn
- > Incorporates a scraper fibre for optimum dirt removal and moisture retention
- > A solution for internal entrances and access points or any area prone to soil and moisture (not recommended on staircases)




Boulevard 7000 - Black Ash

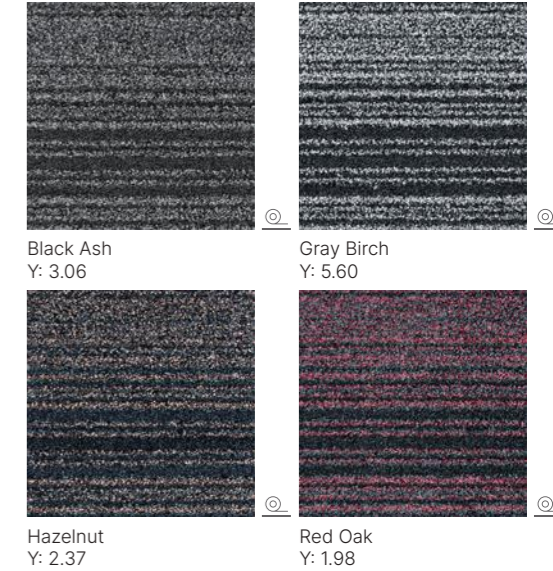

Specification:	Sheet
Product Dimensions	+/- 20m x 2m
Product Construction	Tufted Cut Pile
Surface Yarn	100% Solution Dyed Nylon
Total Carpet Weight	+/- 3525 g/m <sup>2</sup>
Tufted Pile Weight	+/- 825 g/m <sup>2</sup>
Primary Backing	Non-woven Polyester/Polyamide
Secondary Backing	pvc
Total Carpet Thickness	+/- 8mm

For full specification information visit [www.gradus.com](http://www.gradus.com)



# Boulevard Stripe


## Matting

### Secondary Barrier Matting

- > Suitable for commercial office, education and healthcare environments
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Incorporates a scraper fibre for optimum dirt removal and moisture retention
- > A solution for internal entrances and access points or any area prone to soil and moisture (not recommended on staircases)



Boulevard Stripe - Magpie with Boulevard 5000 - Cuckoo

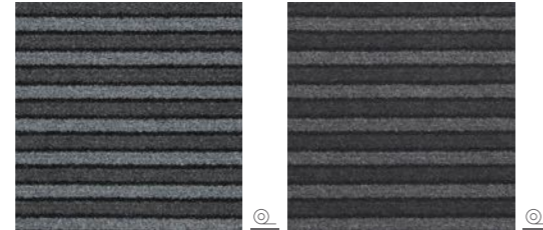

Magpie  
Y: 3.85

Raven  
Y: 2.48

Specification:	Sheet
Product Dimensions	25m x 2m
Product Construction	Tufted Cut Pile
Surface Yarn	ECONYL® Regenerated SDN
Total Carpet Weight	4300 g/m <sup>2</sup>
Tufted Pile Weight	800 g/m <sup>2</sup>
Primary Backing	Non-woven
Secondary Backing	pvc
Total Carpet Thickness	9mm

For full specification information visit [www.gradus.com](http://www.gradus.com)



# Boulevard 6000

## Matting

### Secondary Barrier Matting

- > Suitable for commercial office, education and healthcare environments
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Incorporates a scraper fibre for optimum dirt removal and moisture retention
- > A solution for internal entrances and access points or any area prone to soil and moisture



Boulevard 6000 - Nightfall



Shadow  
Y: 5.36

Nickel  
Y: 3.70


Indigo  
Y: 4.01



Rosemary  
Y: 4.45

Walnut  
Y: 2.86

Atlantic  
Y: 1.90

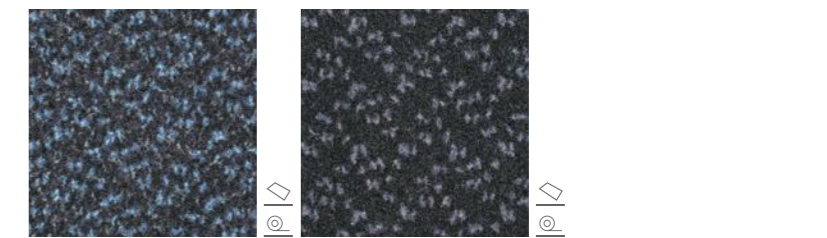

Galaxy  
Y: 2.56

Nightfall  
Y: 1.48

Specification:	Tile	Sheet
Product Dimensions	500mm x 500mm	25m x 2m
Product Construction	Tufted Cut Pile	Tufted Cut Pile
Surface Yarn	ECONYL® Regenerated SDN	ECONYL® Regenerated SDN
Total Carpet Weight	4750 g/m <sup>2</sup>	3700 g/m <sup>2</sup>
Tufted Pile Weight	950 g/m <sup>2</sup>	950 g/m <sup>2</sup>
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen	pvc
Total Carpet Thickness	9mm	7.5mm

For full specification information visit [www.gradus.com](http://www.gradus.com)



Broadloom



# Boulevard 5000

## Matting

### Secondary Barrier Matting

- > Suitable for commercial office, education and healthcare environments
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Incorporates a scraper fibre for optimum dirt removal and moisture retention
- > A solution for internal entrances and access points or any area prone to soil and moisture




Boulevard 5000 - Redpoll with Times Square - Red 06605



Specification:	Tile	Sheet
Product Dimensions	500mm x 500mm	25m x 2m
Product Construction	Tufted Cut Pile	Tufted Cut Pile
Surface Yarn	ECONYL® Regenerated SDN	ECONYL® Regenerated SDN
Total Carpet Weight	4600 g/m <sup>2</sup>	3500 g/m <sup>2</sup>
Tufted Pile Weight	800 g/m <sup>2</sup>	800 g/m <sup>2</sup>
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen	pvc
Total Carpet Thickness	8mm	7mm

For full specification information visit [www.gradus.com](http://www.gradus.com)



Broadloom




# Boulevard 1500


## Matting

### Secondary Barrier Matting

- > Suitable for education and healthcare environments
- > Constructed from 100% Polypropylene yarn
- > Features a ribbed design which provides resistance to compression
- > A solution for internal entrances and access points or any area prone to soil and moisture

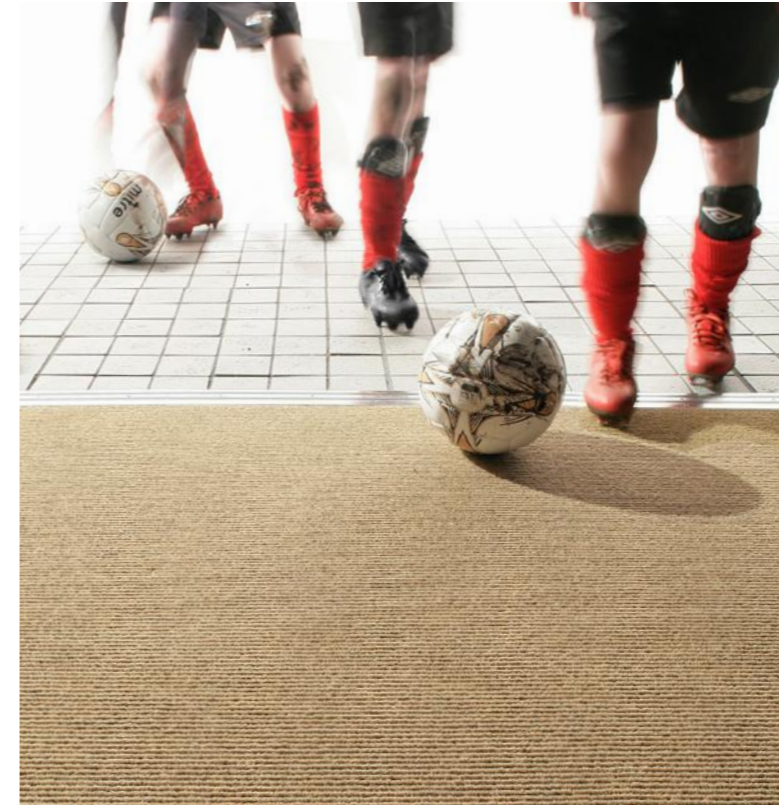


Boulevard 1500 - Terra

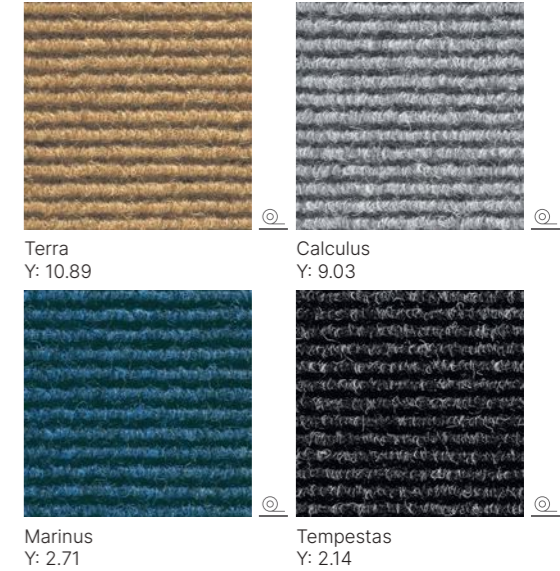

Specification:	Sheet
Product Dimensions	15m x 2m
Product Construction	Needlepunch
Surface Yarn	100% Polypropylene
Total Carpet Weight	3000 g/m <sup>2</sup>
Tufted Pile Weight	1600 g/m <sup>2</sup>
Backing	Rubber
Total Carpet Thickness	9mm

For full specification information visit [www.gradus.com](http://www.gradus.com)



# Fast Track Flooring Tiles

**GTI Max** is an ideal solution for heavy traffic applications and are popular choices for retail, industrial and warehousing environments. A fast renovation solution which can be installed over most existing floors where minimal sub floor preparation is required, as well as no adhesives. Cost effective solutions both in the installation (you do not need to stop production or close the premises) and in terms of easier maintenance (with PUR+ surface treatment).

**Attraction®** is a fast track easy solution with interlocking edges which allows for rapid loose lay installation and replacement. It is cost effective as there is no need to close down the premises and can be installed on a sub floor with minimal preparation. With an ProtecSol® 2 surface treatment it requires minimal maintenance and is a highly durable solution suitable for heavy traffic applications in the retail and industrial and many other markets.

**Creation 70 Connect** is fast track large format loose lay tile that overcomes the difficulty of many irregular sub-floors, making it ideal for refurbishments. Its resilient reinforced core offers dimensional stability and noise absorption whilst being comfortable underfoot. It comes in a range of popular designs and is suitable for medium traffic areas including specialist chains, shops, offices, education and public buildings.



Fast track flooring that saves you time money and inconvenience



			GTI Max	Attraction®	Creation 70 Connect
<b>Description</b>					
Thickness	EN ISO 24346	mm	6.0	5.0	5.0
Wear layer thickness	EN ISO 24340	mm	2.0	1.0	0.70
Weight	EN ISO 23997	g/m <sup>2</sup>	9365	7460	8235
Size	EN ISO 24342	mm	635 × 635 (GTI Connect) 600 × 600 (Cleantech)*	635 × 635 (Connect) 600 × 600 (Cleantech)*	701.3 × 701.3
<b>Classification</b>					
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582	EN ISO 10582
European classification	EN ISO 10874	class	34 -43	34-43	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance wet	DIN 51 130	class	R10	R10	R10
<b>Performances</b>					
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	-	-	T	T	T
Type binder content	ISO 10582	type	I	I	I
Dimensional stability	EN ISO 23999	%	≤ 0.15	≤ 0.15	≤ 0.15
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25
Shore hardness D	EN ISO 868	HD	≥ 55	-	-
Impact sound insulation	EN ISO 717-2	dB	-	-	5
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6	≥ 6
Chemical products resistance	EN ISO 26987	-	OK	OK	OK
Surface treatment	-	-	PUR+	ProtecSol® 2	PUR+ Matt
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 100	< 10	< 10
<b>CE Marking</b>					
CE	EN 14041				

\* Cleantech version (without dovetail) available upon request


# GTI Max

## Fast Track Flooring Tiles



UPDATED

- > Tough and durable, suitable for high traffic in industrial areas
- > Interlocking tiles for fast installation and replacement of tiles
- > Low maintenance due to Polyurethane (PUR+) surface treatment


### Rice Emboss

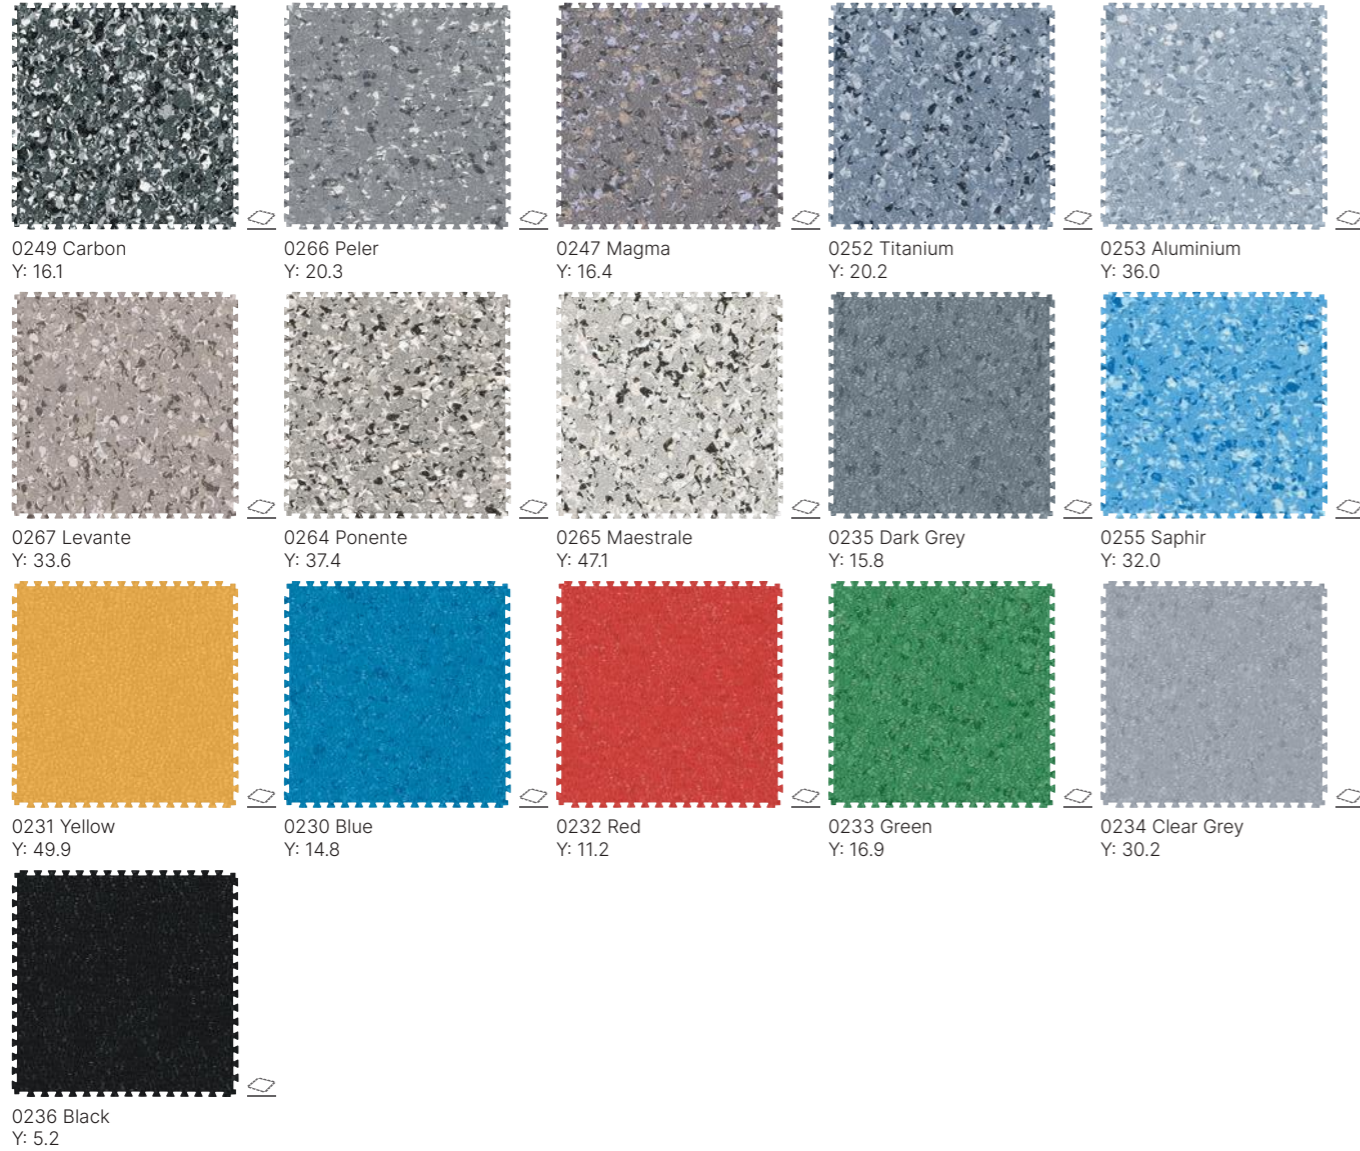

### Concrete Emboss\*

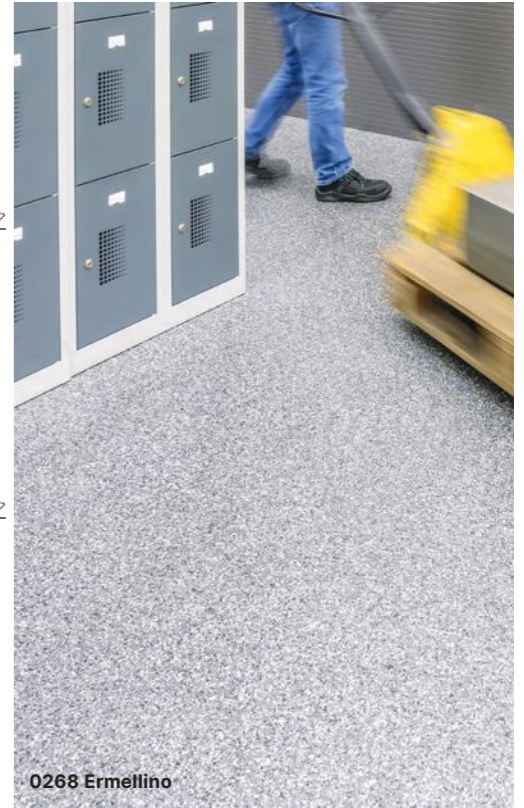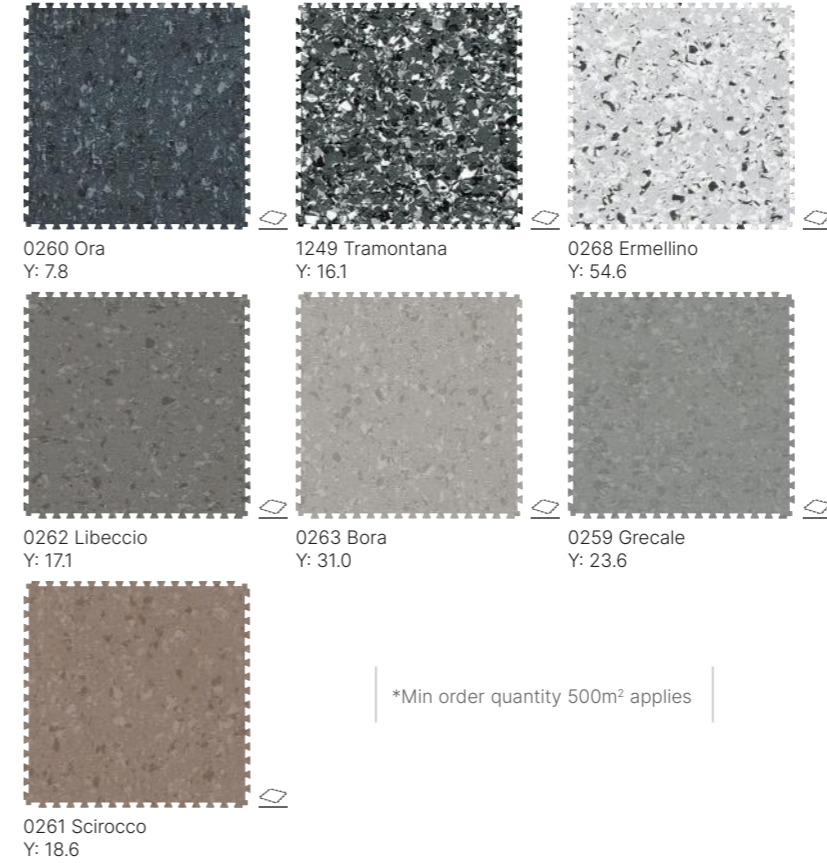

### Soft Emboss

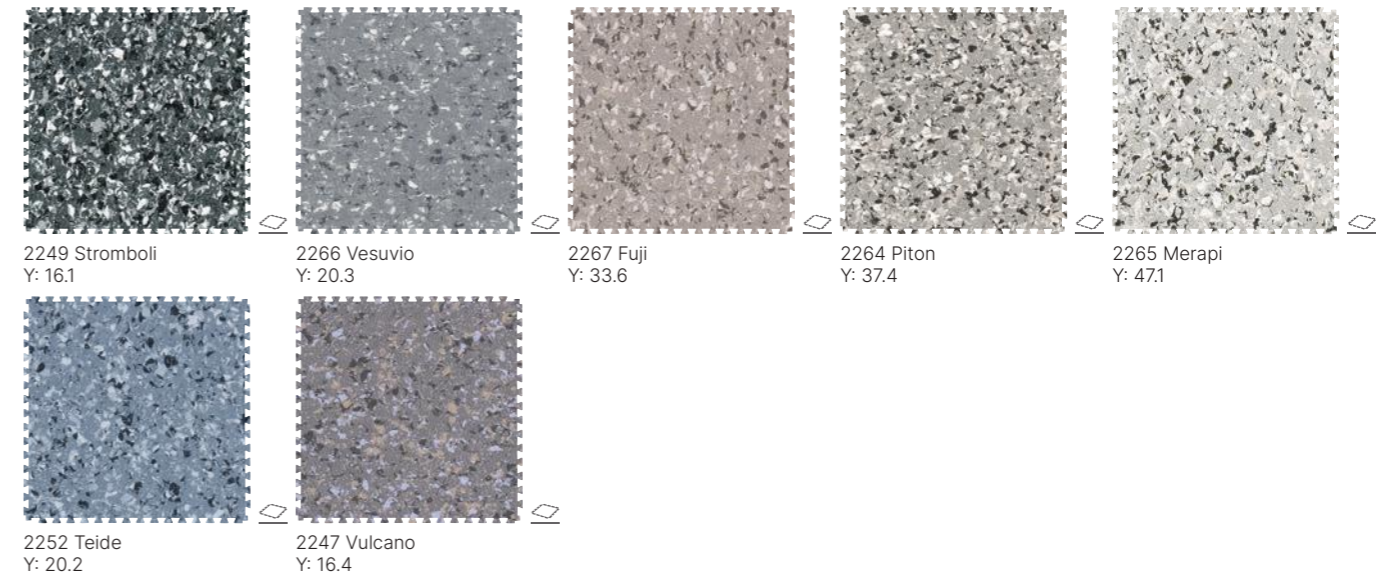

Interlocking Tile Size  
635 × 635mm



PUR+

2.00mm

Wear Layer

T Wear Group


R10 Slip Resistant

Y = Light Reflectance Value (LRV)

# Attraction®

## Fast Track Flooring Tiles

- > Tough and durable, suitable for high traffic areas
- > Interlocking tiles for fast installation and replacement of tiles
- > Low maintenance due to ProtecSol®2 surface treatment

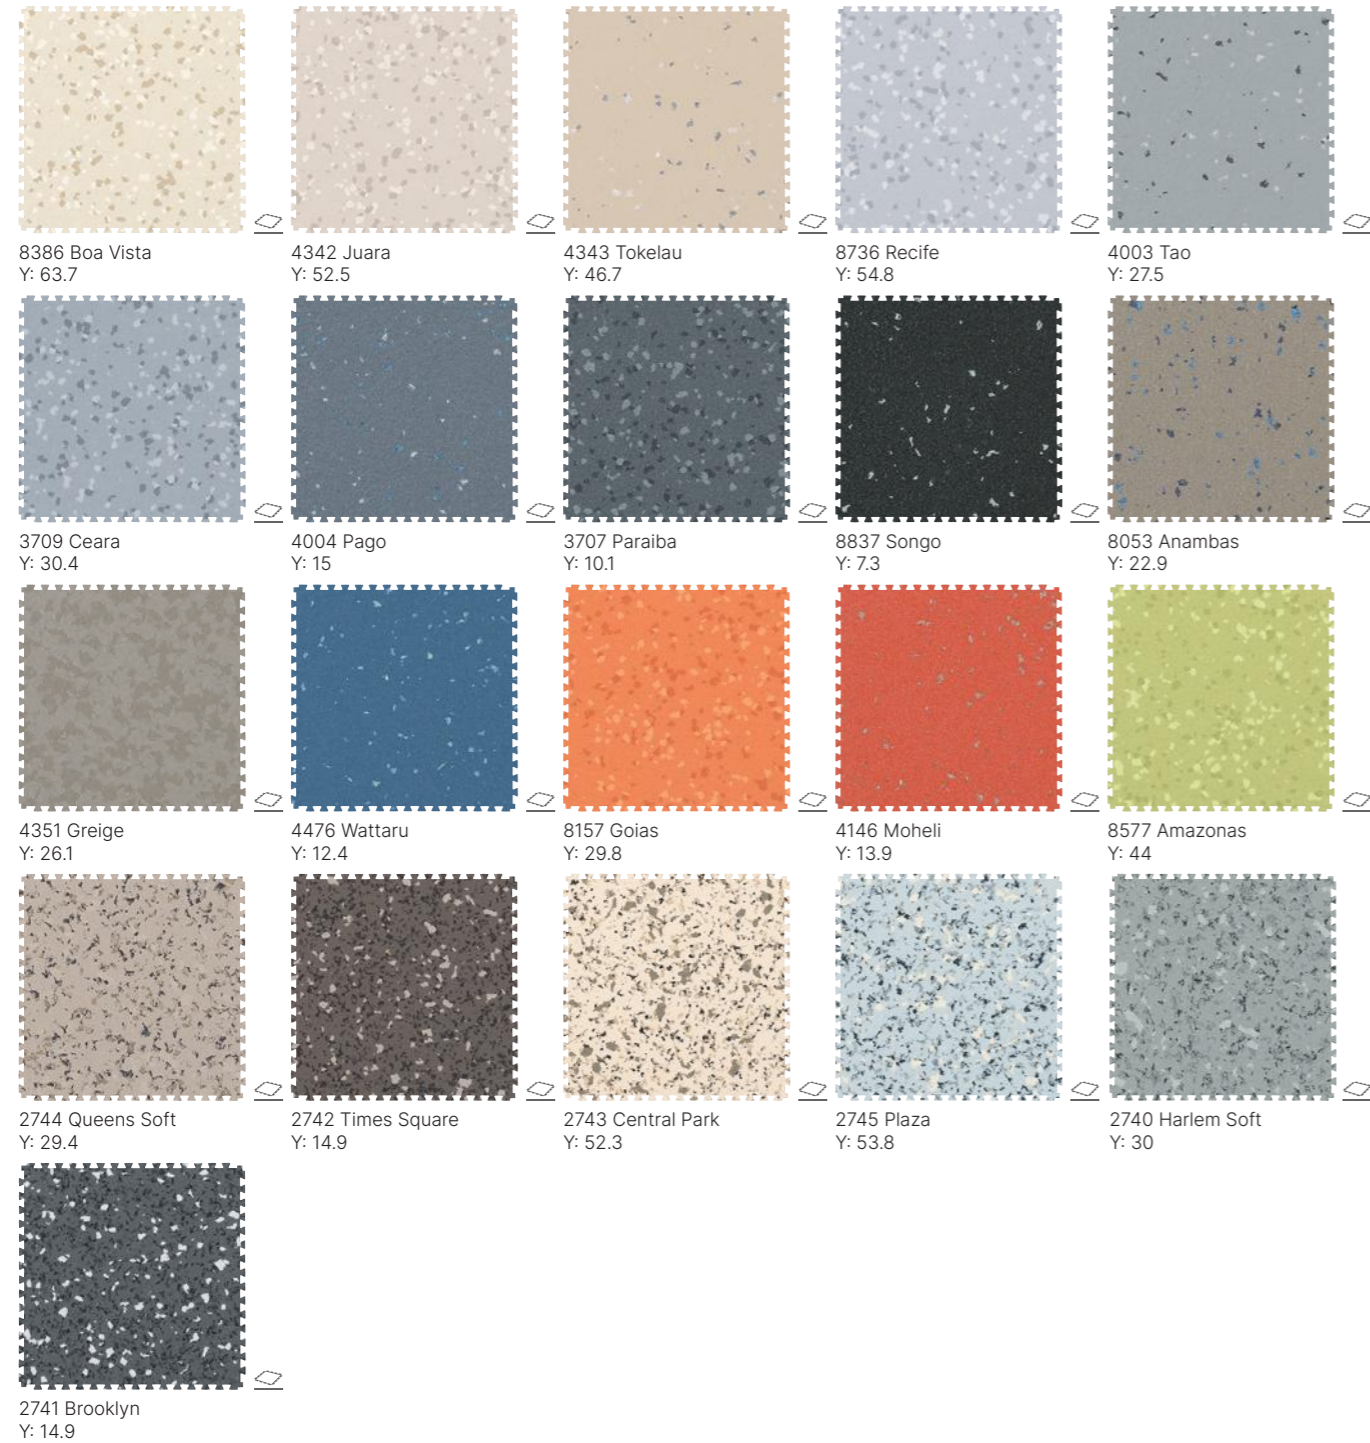

Interlocking Tile Size  
635 × 635mm



ProtecSol®2

1.00mm

Wear Layer

T Wear Group

R10 Slip Resistant

Y = Light Reflectance Value (LRV)



2741 Brooklyn / 2740 Harlem Soft

# Creation 70 Connect

## Fast Track Flooring Tiles


UPDATED

- > Extra-large, square format, fast track tiles
- > Resilient reinforced core, suitable for medium traffic applications
- > PUR+ Matt surface treatment - easy to maintain


### Textile



### Concrete

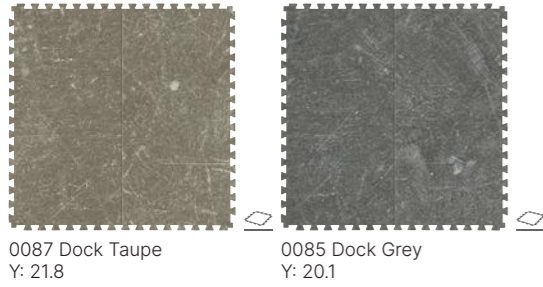

### Terrazzo

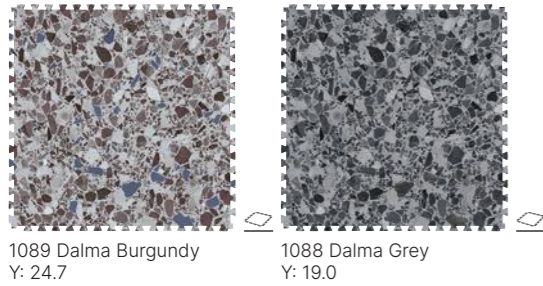

### Woods



Interlocking Tile Size  
701.3 × 701.3mm



PUR+ Matt


0.7mm

Wear Layer

T Wear Group

R10 Slip Resistant

Y = Light Reflectance Value (LRV)

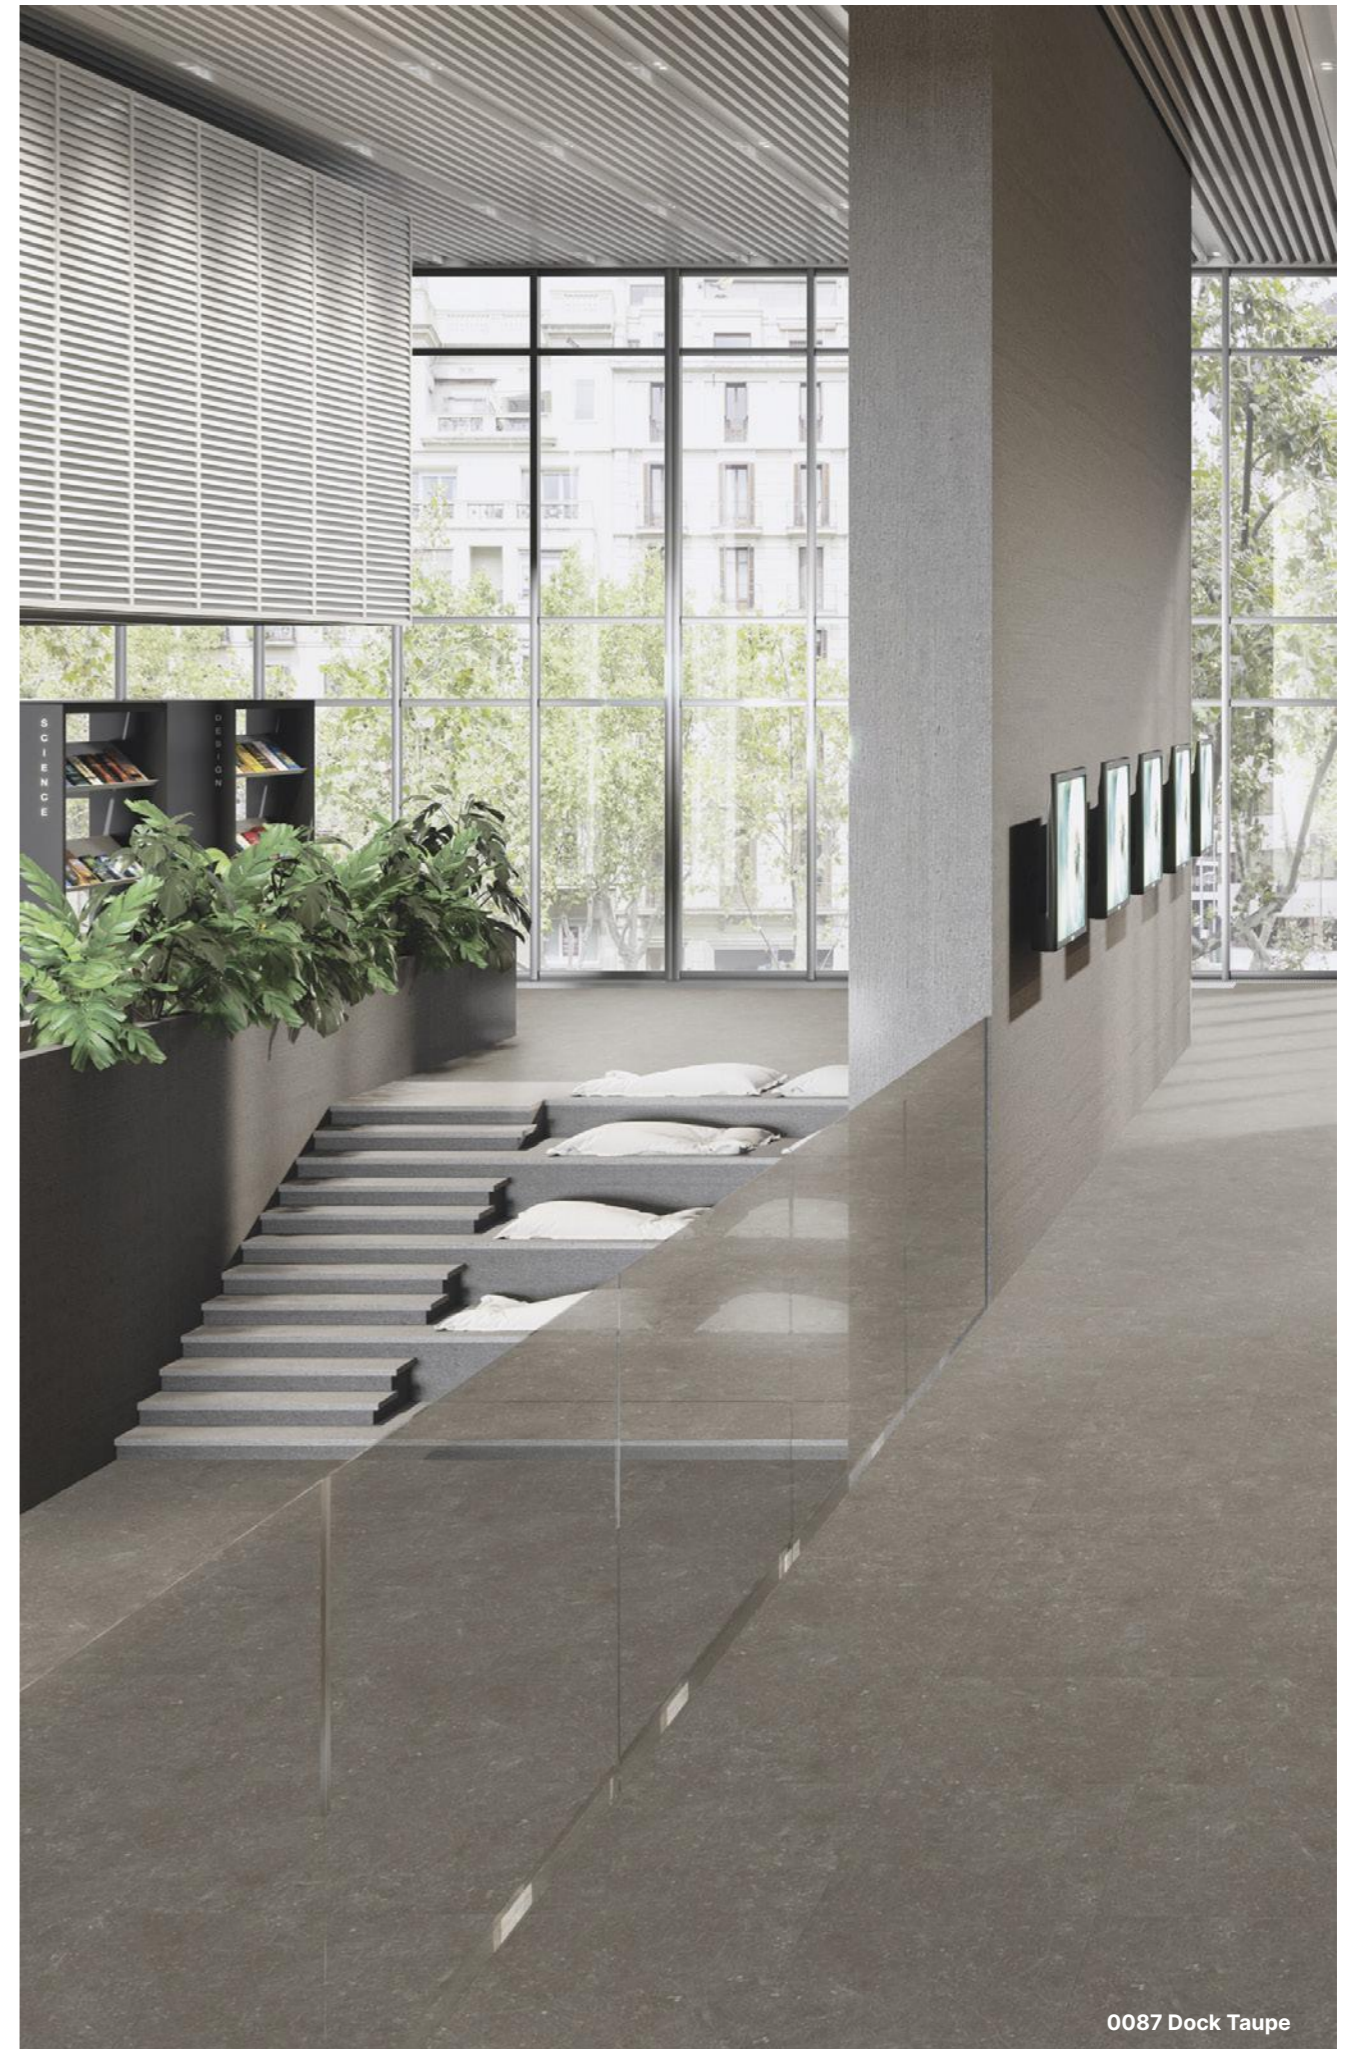

0087 Dock Taupe


# ESD Technical Tiles

UPDATED

**GTI® EL5** is the ideal solution for heavy traffic applications where an ESD solution is required such as laboratories, data centres, cleanroom, healthcare and ATEX areas. It offers all the benefits of a GTI tile with Evercare™ surface treatment and electro-conductive properties.

**GTI® EL5 Connect** is an electroconductive, looselay, heavy-duty tile with outstanding resistance to traffic. It is available in an interlocking tile format with dovetails for fast and easy installation.



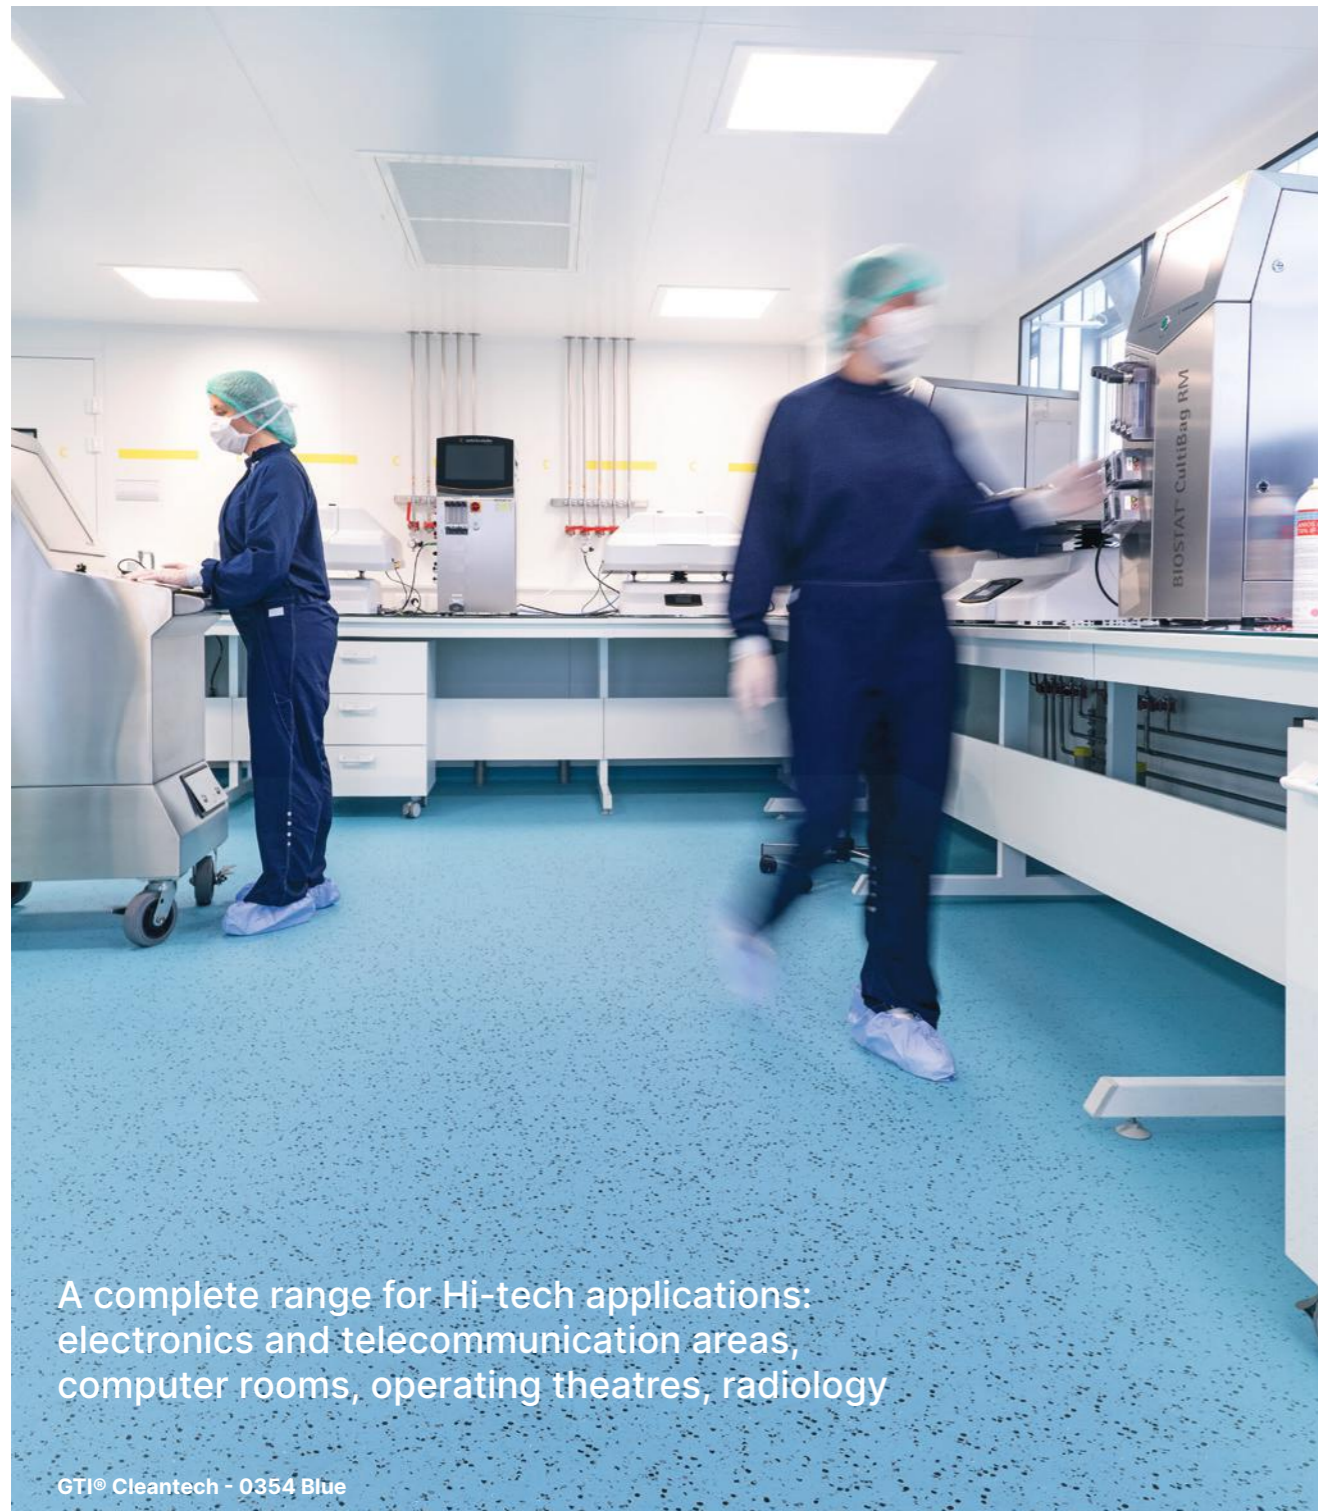


**GTI® EL5 Cleantech** is an electroconductive, looselay, heavy-duty tile with outstanding resistance to traffic. It is available in a square format with welded joints for clean environments and watertight systems.



A complete range for Hi-tech applications: electronics and telecommunication areas, computer rooms, operating theatres, radiology

GTI® Cleantech - 0354 Blue



			GTI®	
			EL5 Connect	EL5 Cleantech
<b>Description</b>				
Thickness	EN ISO 24346	mm	6.0	6.0
Wear layer thickness	EN ISO 24340	mm	2.0	2.0
Weight	EN ISO 23997	g/m <sup>2</sup>	9240	9240
Tile size	EN ISO 24342	mm	635 × 635	650 × 650
<b>Classification</b>				
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582
European classification	EN ISO 10874	class	34-43	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Electrical resistance	EN 1081	Ohm	5×10 <sup>4</sup> ≤Rt≤10 <sup>6</sup>	5×10 <sup>4</sup> ≤Rt≤10 <sup>6</sup>
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet	DIN 51130	class	R9	R9
<b>Performances</b>				
Wear group	EN 660.2	mm <sup>3</sup>	≤ 4.0	≤ 4.0
Wear group	QB 30	group	P	P
Type Binder content	EN ISO 10582	type	I	I
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.15	≤ 0.15
Castor chair test (type W)	ISO 4918	-	OK	OK
Shore Hardness	EN ISO 868	H <sub>0</sub>	≥ 90	≥ 90
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	Evercare™
Chemical products resistance	EN ISO 26987	-	OK	OK
<b>Environment / indoor air quality</b>				
TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®
<b>CE Marking</b>				
CE	EN 14041		    	




# GTI® EL5 Connect + EL5 Cleantech

## Technical Tiles


UPDATED

- > Suitable for high traffic in industrial areas
- > Electroconductive flooring
- > Connect interlocking tiles provide fast installation and Cleantech tiles provide a watertight system (hot welding)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance

### GTI® EL5 Connect

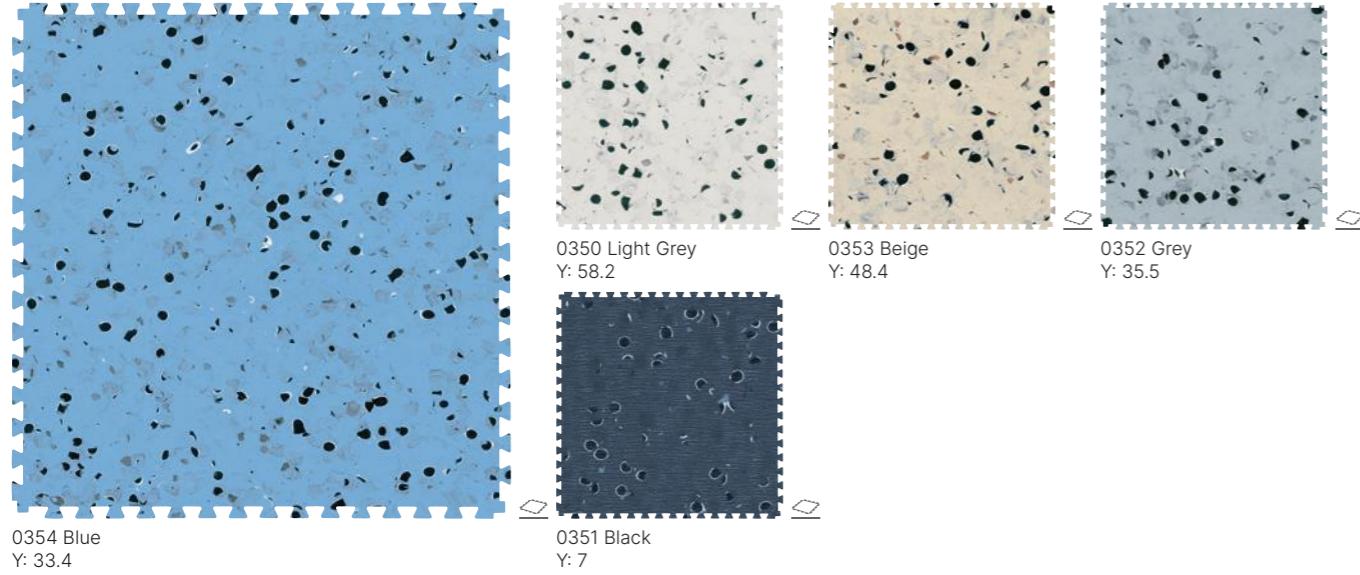

### GTI® EL5 Cleantech

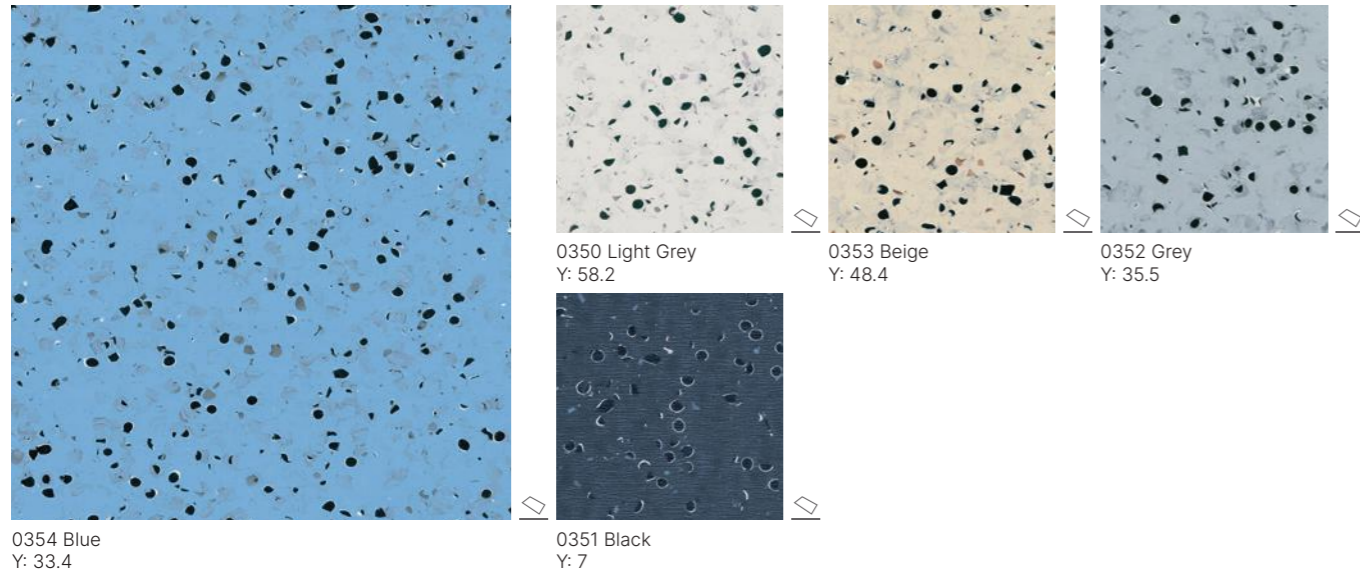

<b>Connect Interlocking Tile Size</b> 635 × 635mm	<b>Cleantech Tile Size</b> 650 × 650mm	<b>P</b> Wear Group	<b>R9</b> Slip Resistant	<b>EL5 Connect</b> 10 <sup>4</sup> ≤ Rt ≤ 10 <sup>6</sup> Ω	<b>EL5 Cleantech</b> 10 <sup>4</sup> ≤ Rt ≤ 10 <sup>6</sup> Ω
Connect Interlocking Tile	Cleantech Tile	<b>Evercare™</b>	<b>2.00mm</b> Wear Layer	100% Recyclable	<b>Y = Light Reflectance Value (LRV)</b>



GTI® Cleantech - 0354 Blue

# Compact Linoleum Flooring

**DLW Marmorette** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2400gr/sqm in 2.0mm, 2900gr/sqm in 2.5mm and 3800gr/sqm in 3.2mm. It features a marbled design and presents a matt finish, is composed of 98% bio based materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

**Marmorette LCH Dissipative Linoleum for ESD Areas** Marmorette LCH is a calendered linoleum compact dissipative floorcovering providing excellent resistance to everyday wear and tear in high traffic areas.

**DLW Colorette** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900gr/sqm in 2.5mm. It features a speckled design and presents a matt finish, is composed of 98% bio based materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

**DLW Uni Walton** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900gr/sqm in 2.5mm. It features a uni design and presents a matt finish, is composed of 98% bio based materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.



Sustainable by nature, made from natural materials

0554 Concrete Grey



			DLW Marmorette	Marmorette LCH	DLW Colorette	DLW Uni Walton
<b>Description</b>						
Thickness	EN ISO 24346	mm	2.0 / 2.5 / 3.2	2.5	2.5	2.5
Backing	-	-	Jute fabric	Jute fabric	Jute fabric	Jute fabric
Weight	EN ISO 23997	g/sqm	2400 / 2900* / 3800	3000	2900	2900
Width of sheet	EN ISO 24341	cm	200	200	200	200
Length of sheet	EN ISO 24341	w	20-31	20-31	20-31	20-31
<b>Classification</b>						
Norm / Product specification	-	-	EN ISO 24011	EN ISO 24011	EN ISO 24011	EN ISO 24011
European classification	EN ISO 10874	class	23 / 34 / 43 23 / 32 / 41 in 2.0mm	23 / 34 / 43	23 / 34 / 43	23 / 34 / 43
Fire rating	EN 13501-1	class	Cfl-s1**, Bfl-s1*	Cfl-s1**	Cfl-s1**	Cfl-s1**
Impact sound insulation	EN ISO 717-2	dB	3dB / 5dB* / 6dB	3dB	5dB	5dB
Slip resistance	ASR A1.5 / DIN 51130 - BGR 181	class	R9, R10*	R9	R9	R9
<b>Performances</b>						
Residual indentation	EN ISO 24343-1	mm	≤ 0.09 / ≤ 0.11, ≤ 0.11*	≤ 0.11	≤ 0.11	≤ 0.11
Colour fastness	EN ISO 105 - B02	degree	6	6	6	6
Vertical resistance	EN 1081	Ohm	-	10 <sup>6</sup> ≤ R ≤ 10 <sup>8</sup>	-	-
Point contact resistance	VDE 0100	kOhm	> 200	>100	> 200	> 200
Static electrical propensity	EN 1815	kV	≈ 2.0	≈ 2.0****	≈ 2.0	≈ 2.0
Castor chair test (Type W)	ISO 4918	-	OK	OK	OK	OK
Flexibility	ISO 24344	mm	Ø 20 (2.5mm)	Ø 20	Ø 20	Ø 20
Thermal resistance	EN 12667	sqm,K/W	0.012 / 0.015 / 0.018, 0.015*	0.015	0.015	0.015
Thermal conductivity	EN ISO 10456	W/(m.K)	0.17	0.17	0.17	0.17
Surface treatment	-	-	Neocare™	Neocare™	Neocare™	Neocare™
Chemical products resistance	EN ISO 26987	class	OK	OK	OK	OK
Anti-bacterial activity (E.coli- S.aureus- MRSA)***	EN ISO 22196 / JIS Z 2801	-	> 99.99% inhibits growth	> 99.99% inhibits growth	>99.99% inhibits growth	>99.99% inhibits growth
Anti-viral activity (Human coronavirus)***	ISO 21702	-	> 98.65% virucidal activity	> 98.65% virucidal activity	> 98.65% virucidal activity	> 98.65% virucidal activity
TVOC after 28 days	EN 16516	microgram/m <sup>3</sup>	< 10	< 10	< 10	< 10
Certification	Cradle to Cradle	Silver	Silver	-	Silver	Silver
<b>CE Marking</b>						
CE	EN 14041 : 2004 AC : 2006					

\* **R10 Bfl** Also available in the following colours:

0023 Dusty Blue, 0045 Sand Beige, 0053 Ice Grey, 0059 Plumb Grey, 0070 Rocky Brown

\*\* Glued according to certificate.

\*\*\* The implementation of an effective cleaning method is the best defence against infection.

\*\*\*\* ⚠ Dissipative Linoleum for ESD areas, available in the following colours: 0055 Ash Grey, 0023 Dusty Blue

# DLW Marmorette


## Linoleum Flooring

- > Made of 98% natural (bio based and mineral) and 76% rapidly renewable materials
- > Up to 40% recycled content
- > Product certified by many eco-labels, including Blue Angel, M1, Floorscore and Cradle to Cradle
- > Exclusive Neocare surface treatment : best in class micro scratch and stain resistance, easy maintenance, no emissions
- > Hygienic properties : antibacterial activity (EN ISO 22196) and antiviral activity (ISO 21702)



R10 R10: In-stock Bfl Bfl-s1: In-stock

Y = Light Reflectance Value (LRV) | Weld Rods see page 234 | \*Only available in 2.5mm & 3.2mm

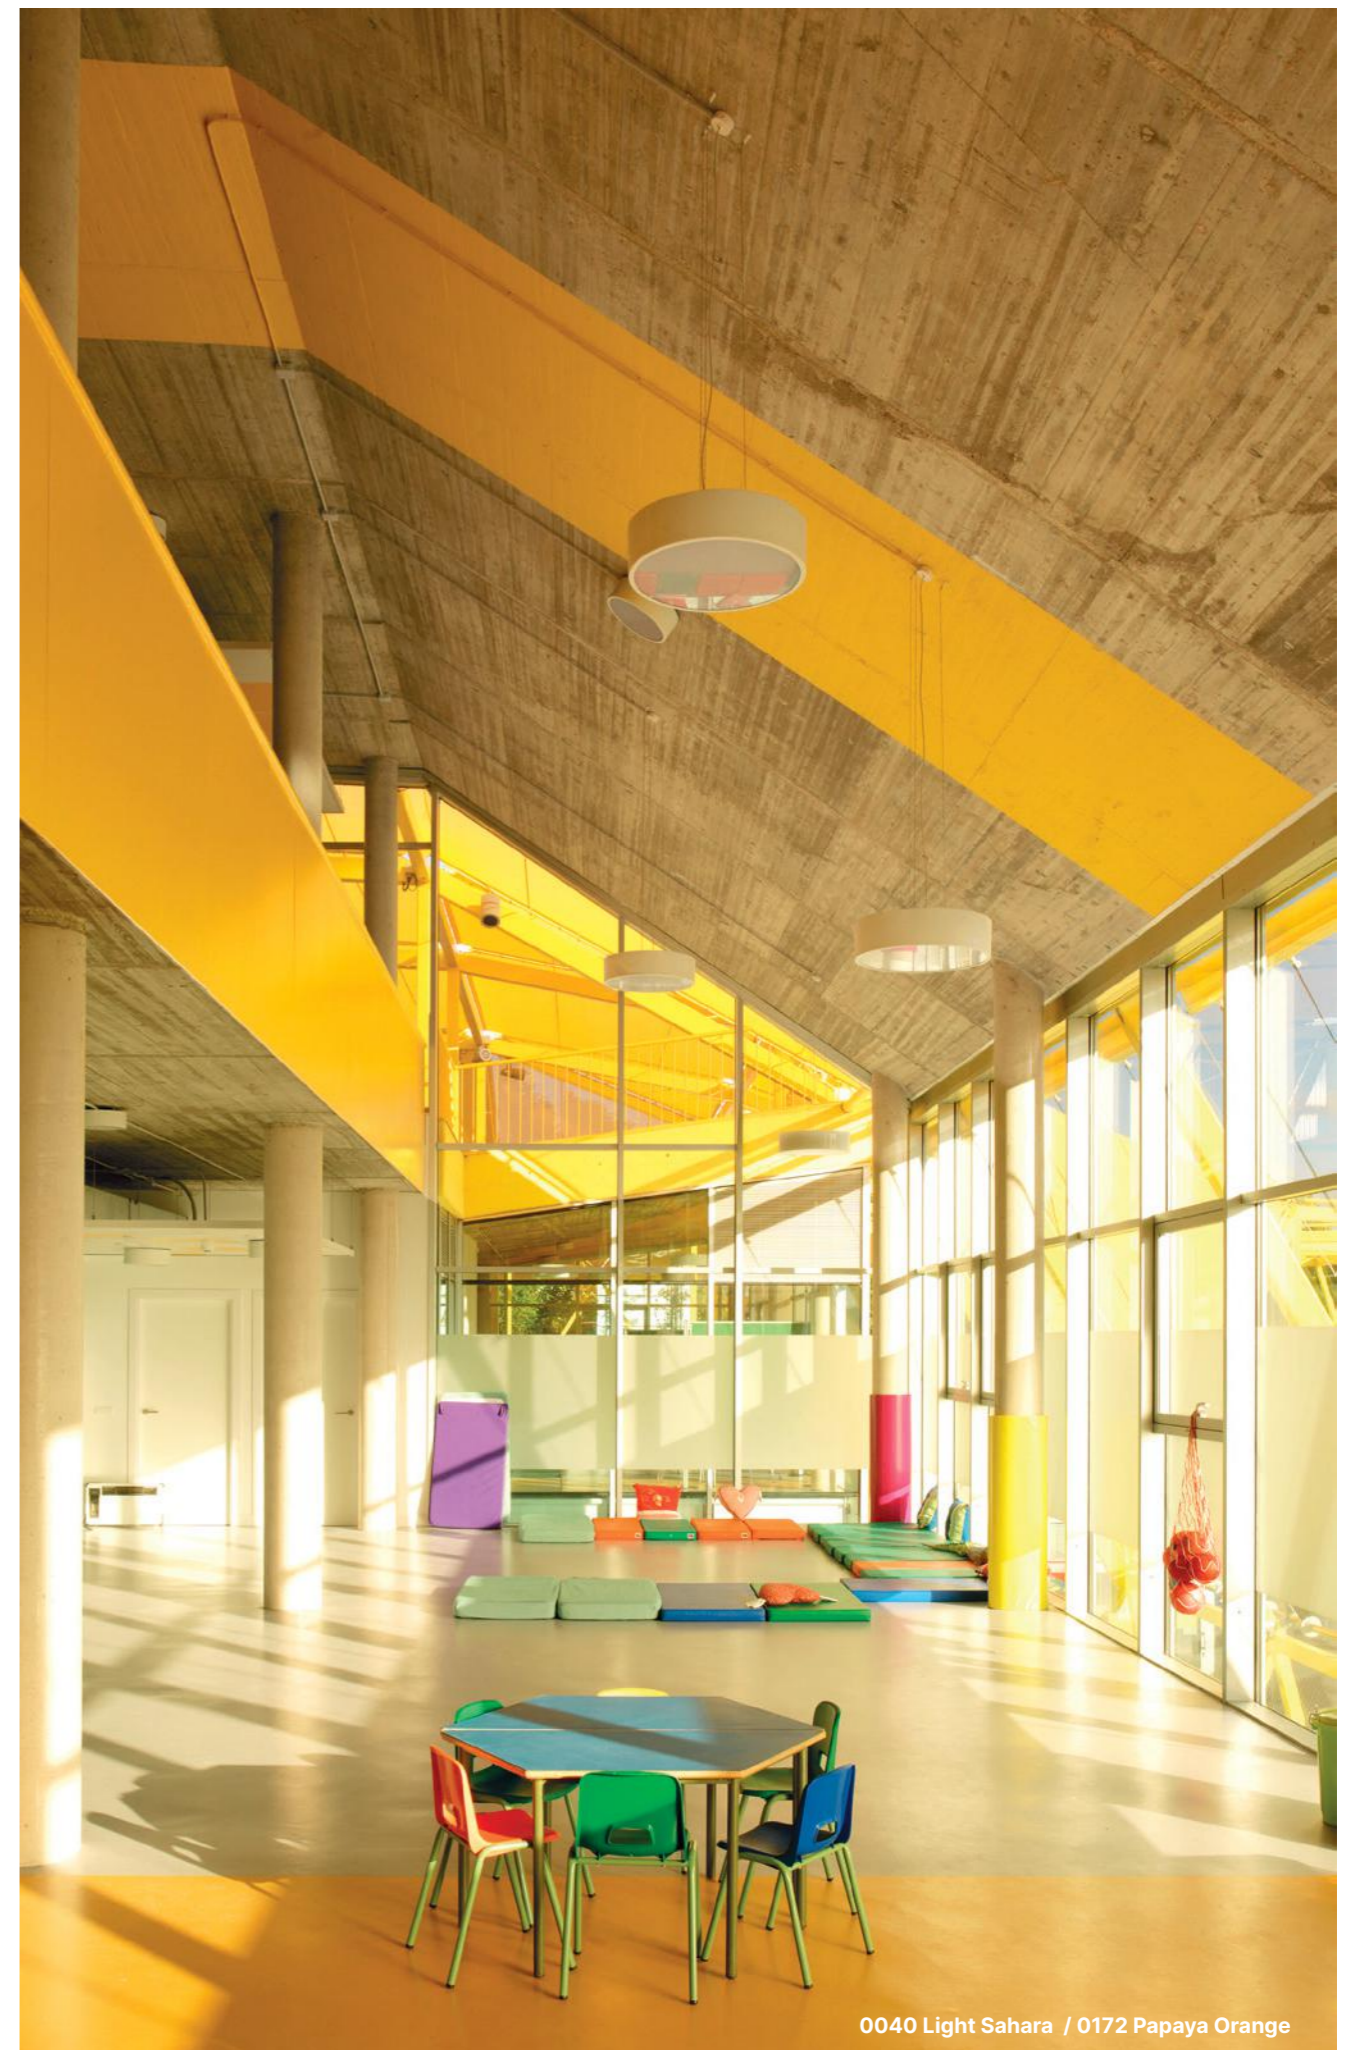


0040 Light Sahara / 0172 Papaya Orange

# DLW Marmorette

## Linoleum Flooring

UPDATED

- > Made of 98% natural (bio based and mineral) and 76% rapidly renewable materials
- > Up to 40% recycled content
- > Product certified by many eco-labels, including Blue Angel, M1, Floorscore and Cradle to Cradle
- > Exclusive Neocare surface treatment : best in class micro scratch and stain resistance, easy maintenance, no emissions
- > Hygienic properties : antibacterial activity (EN ISO 22196) and antiviral activity (ISO 21702)

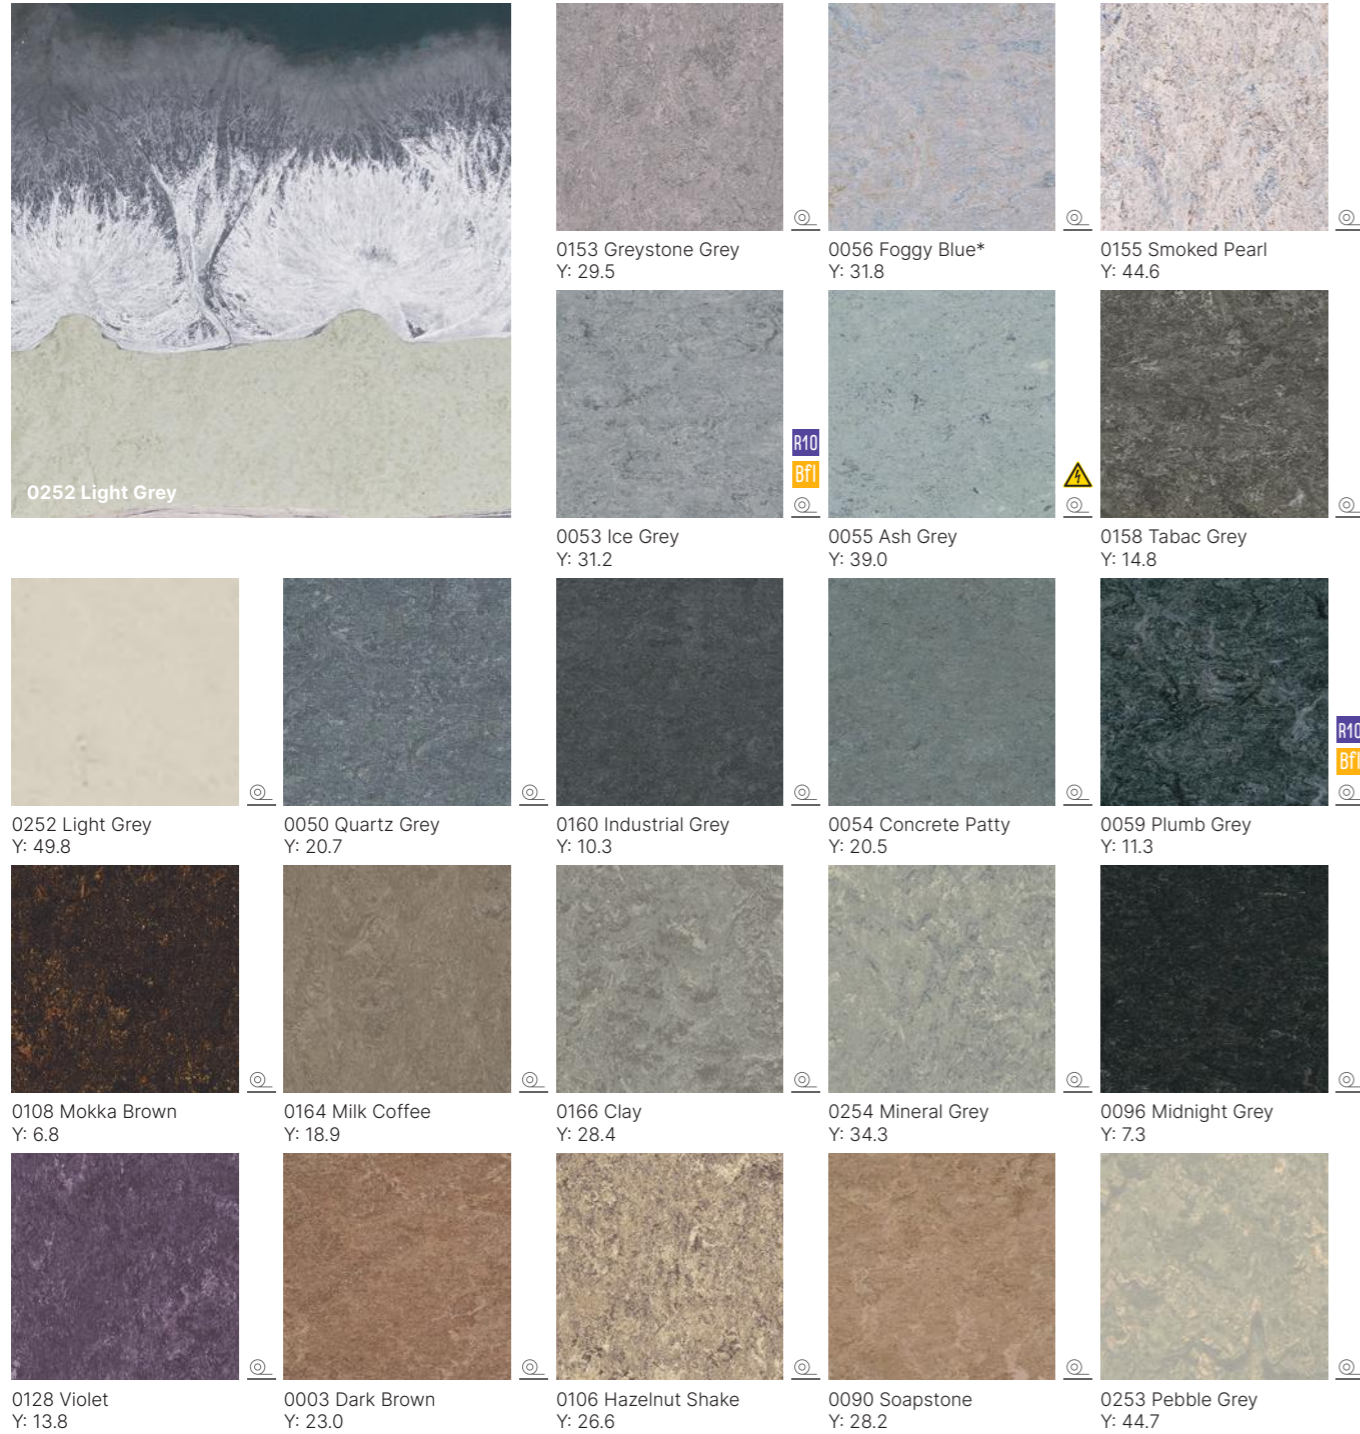


R10 R10: In-stock Bfl Bfl-s1: In-stock ⚠ Dissipative Linoleum for ESD areas


Compact Neocare™ 2.0mm 2.5mm 3.2mm Y = Light Reflectance Value (LRV) Weld Rods see page 234 \*Only available in 2.5mm & 3.2mm

# DLW Colorette

## Linoleum Flooring

- > Made of 98% natural (bio based and mineral) and 76% rapidly renewable materials
- > Up to 40% recycled content
- > Product certified by many eco-labels, including Blue Angel, M1, Floorscore and Cradle to Cradle
- > Exclusive Neocare surface treatment : best in class micro scratch and stain resistance, easy maintenance, no emissions
- > Hygienic properties : antibacterial activity (EN ISO 22196) and antiviral activity (ISO 21702)

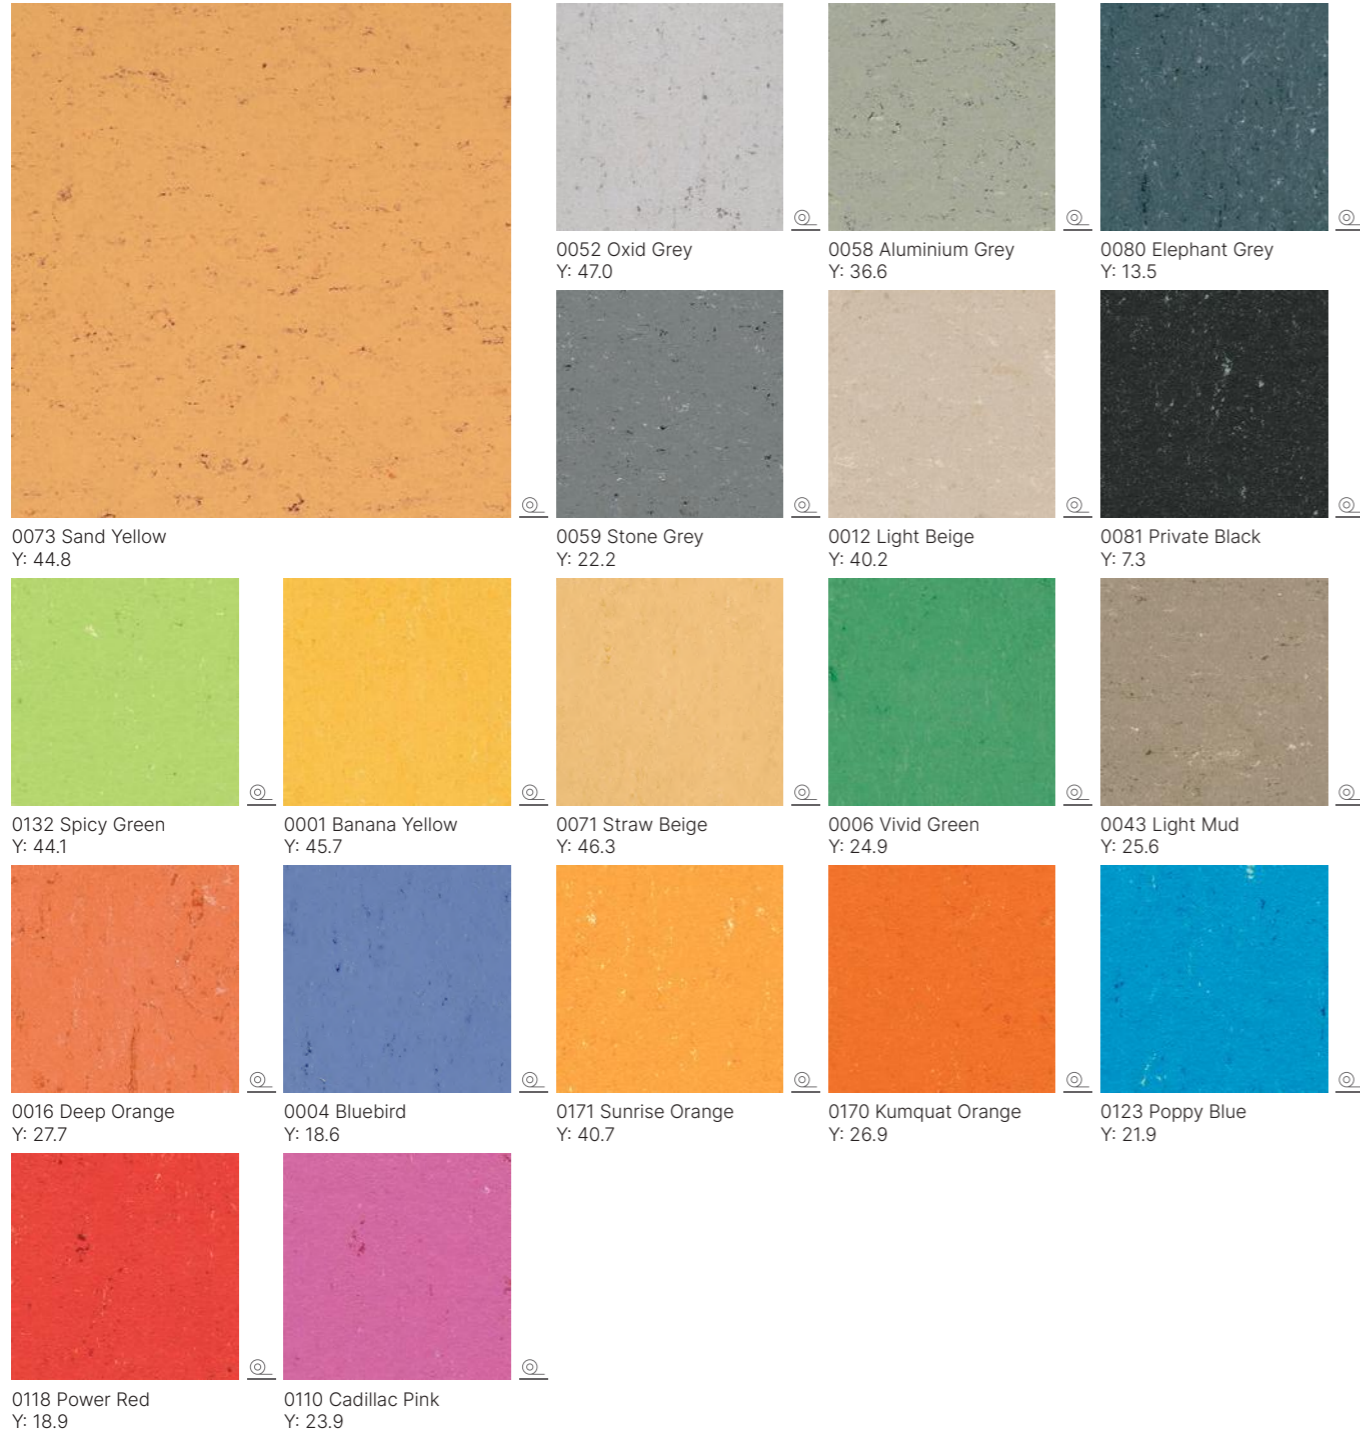

 Y = Light Reflectance Value (LRV)
 
 Weld Rods see page 234




0006 Vivid Green

# DLW Uni Walton

## Linoleum Flooring

- > Made of 98% natural (bio based and mineral) and 76% rapidly renewable materials
- > Up to 32% recycled content
- > Product certified by many eco-labels, including Blue Angel, M1, Floorscore and Cradle to Cradle
- > Exclusive Neocare surface treatment : best in class micro scratch and stain resistance, easy maintenance, no emissions
- > Hygienic properties : antibacterial activity (EN ISO 22196) and antiviral activity (ISO 21702)

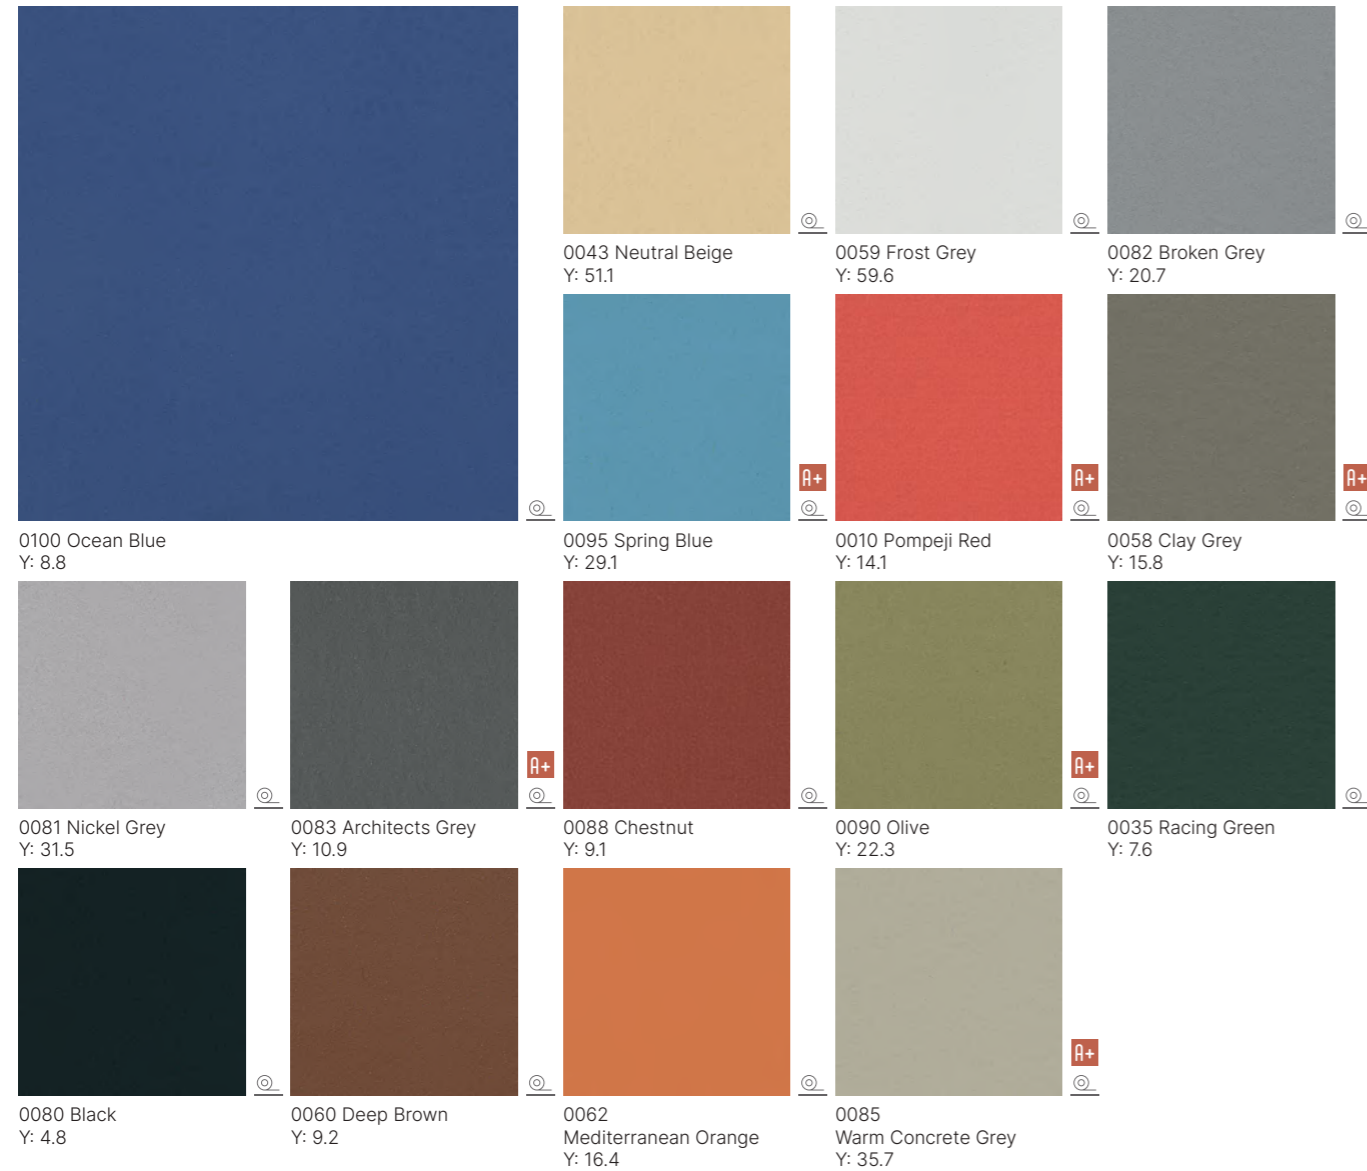

A+ AcousticPlus 19 dB



Neocare™

2.5mm

Y = Light Reflectance Value (LRV)

Weld Rods see page 234




0081 Nickel Grey

**Weld rods** are available for all types of pvc flooring and provide a seamless join that ensures a watertight seal. Scan the QR code on your phone to view our on-line tool to find the weld rod to match your floor covering.



## Find the welding rod to match your floor covering

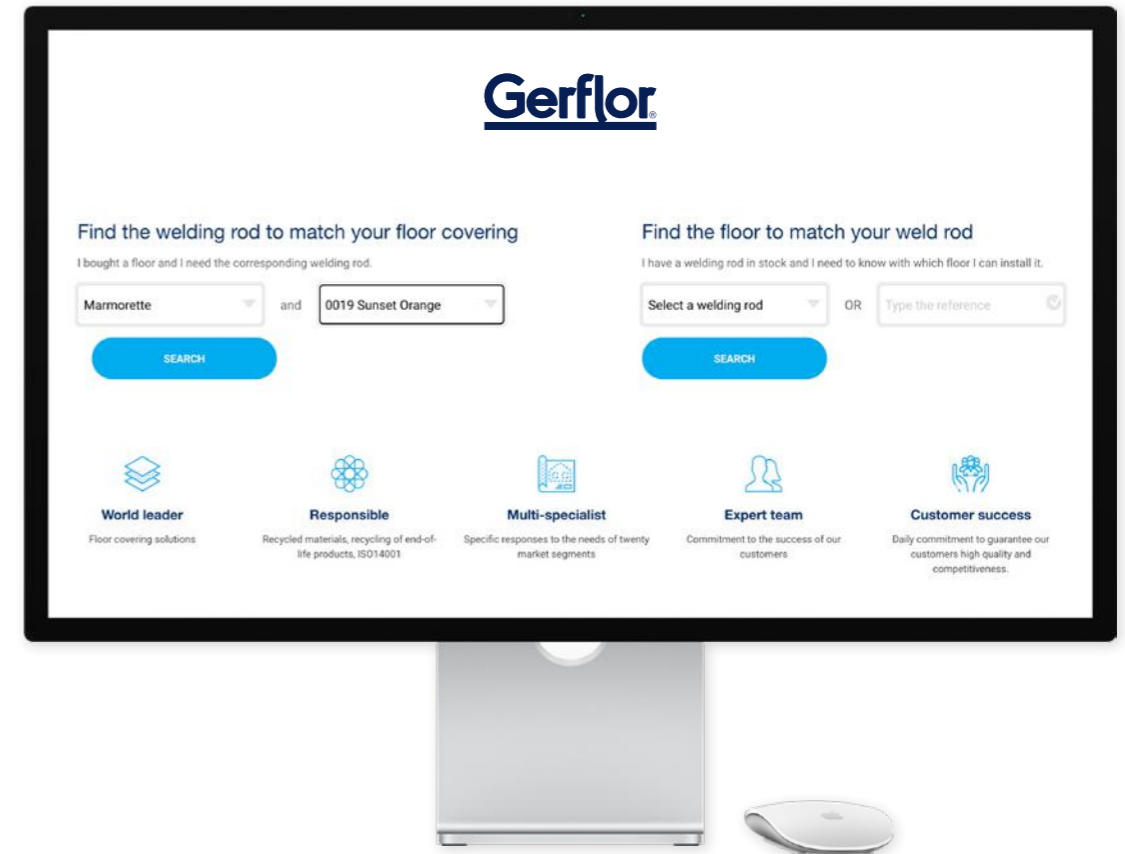

## Scan the QR code



**Weld rods**

- > Contract Safety Flooring
- > Homogeneous Flooring
- > Multilayered Flooring
- > Compact Linoleum Flooring
- > Sports Flooring
- > Shower Solutions

Refer to our installation techniques on: [www.gerflor.co.uk](http://www.gerflor.co.uk)




## The original no-polish-for-life solution.

This unique UV-cured polyurethane surface treatment protects the floorcovering and eliminates the need for costly emulsion dressings throughout the life of the product.


Developed exclusively by Gerflor back in 1987, Protecsol® is a permanent, factory applied treatment which has been proven independently to reduce both the time and costs required to protect standard, resilient floorcoverings.

Gerflor is an innovative manufacturer and continuously strives through heavy investment in R&D to meet and exceed its customers expectations both in terms of product quality and in low environmental impact.

### Exclusive to Gerflor

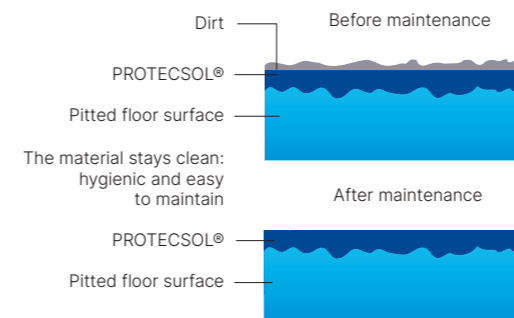

### Low environmental impact

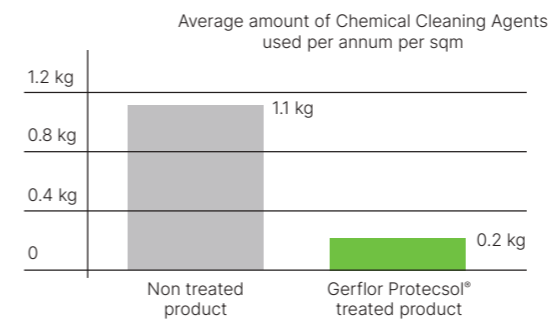

## All the advantages of Protecsol®, and more!


PROTECSOL® 2 technology combines all the advantages of Protecsol®, tested and approved over 20 years ago: ease of maintenance, no need for wax and polish for life, water and detergent savings, plus two additional benefits:

### ① The best stain shield

#### Highly durable:

Exclusive surface treatment applied by UV lasercross-linking provides superior durability and an even surface thickness, creating an impenetrable barrier against stains and chemicals.

#### Longer life expectancy.

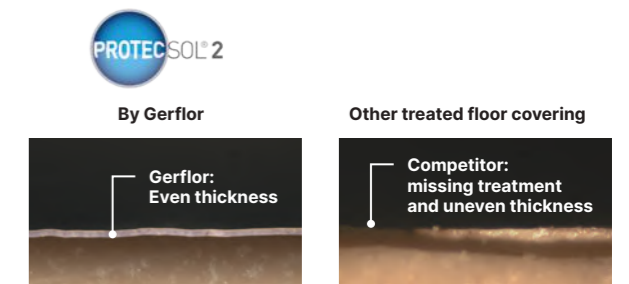

#### Water-repellent effect:

The surface treatment creates a 100% non-porous barrier to prevent all liquids and chemicals from penetrating the materials, remaining on the surface.

#### Simple and easy stain removal.



### ② Matt effect for enhanced design






## SparClean®

### New generation of surface treatment for Tarasafe safety flooring.

SparClean® is a powder coated treatment that when heated forms a totally smooth surface between the mineral crystal particles, eliminating dirt traps and setting new standards for cleanliness and hygiene. The unique method of manufacture ensures that the slip resistance of the Tarasafe safety flooring is not impaired in any way, yet provides a safety floor that is easy to clean.

SparClean® is a permanent surface treatment that gives extreme resistance to soiling and staining, offers excellent resistance to chemicals and ensures long term product durability.

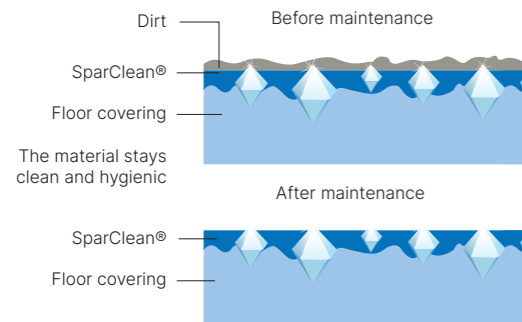

## evercare™ TECHNOLOGY

### An exclusive patented technology by Gerflor.

The best chemical stain resistance surface treatment.

#### Highly durable:

Exclusive surface treatment applied by UV laser cross-linking provides superior durability and an even surface thickness, creating an impenetrable barrier against stains and chemicals found in healthcare like betadine, eosin or anti-bacterial hand gel.

#### Longer life expectancy.



#### 100% non-porous surface:

The surface treatment creates a 100% non-porous barrier to all liquids and chemicals, keeping all stains floating on the surface.


#### Simple and easy stain removal.



## Protecshield™

### The NEW surface treatment by Gerflor.


This high performance polyurethane surface treatment (Protecshield™) provides ease of maintenance, prevents micro-scratches and has a ultra matt surface finish.

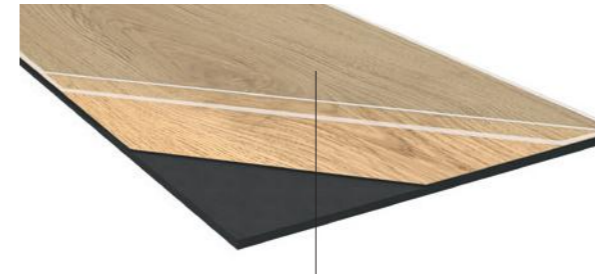

#### Improved Performance



#### Microscopic view (x5)

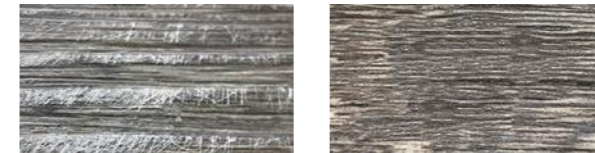

Standard varnish

Protecshield™

#### Enhanced Durability



## Carpets

### Maintain Appearance

- > Carpet should be vacuumed daily using a heavy duty upright vacuum cleaner.
- > Deep Cleaning to remove bacteria and viruses
- > Carpet should be deep cleaned on a regular basis with frequency depending on the type of area and volume of traffic
- > Gradus has worked with Seldon Research to establish a range of cleaning products developed to disinfect against bacteria and viruses
- > Contact Gradus for more information



### Daily cleaning to remove surface soil



## PUR+

### Polyurethane surface treatment.

PUR+ surface treatment provides excellent cleaning characteristics and improved resistance to scratching. It significantly delays application of wax and provides excellent resistance to chemicals.

### PUR Polyurethane surface treatment.




PUR surface treatment is a good foundation for routine maintenance and avoids the immediate use of an acrylic emulsion after installation.

### PU Protective PU factory seal.


This factory coating initially applied is an installation protection and a good foundation for routine maintenance. Acrylic emulsion / polish is required after installation.

## New design, new navigation!

A website you can access on your tablet or smartphone everywhere!

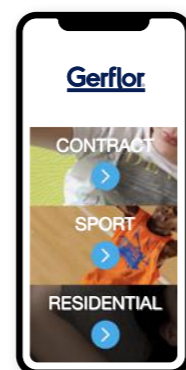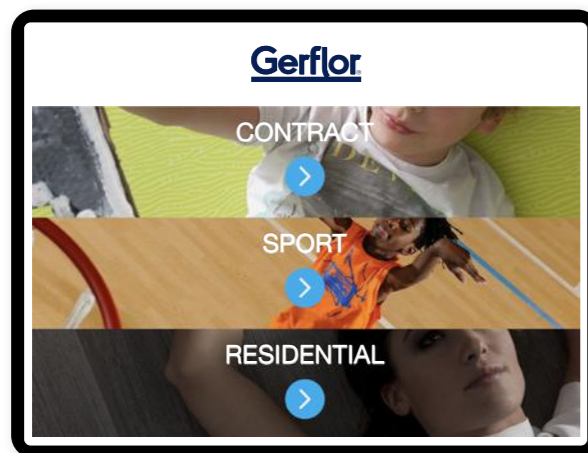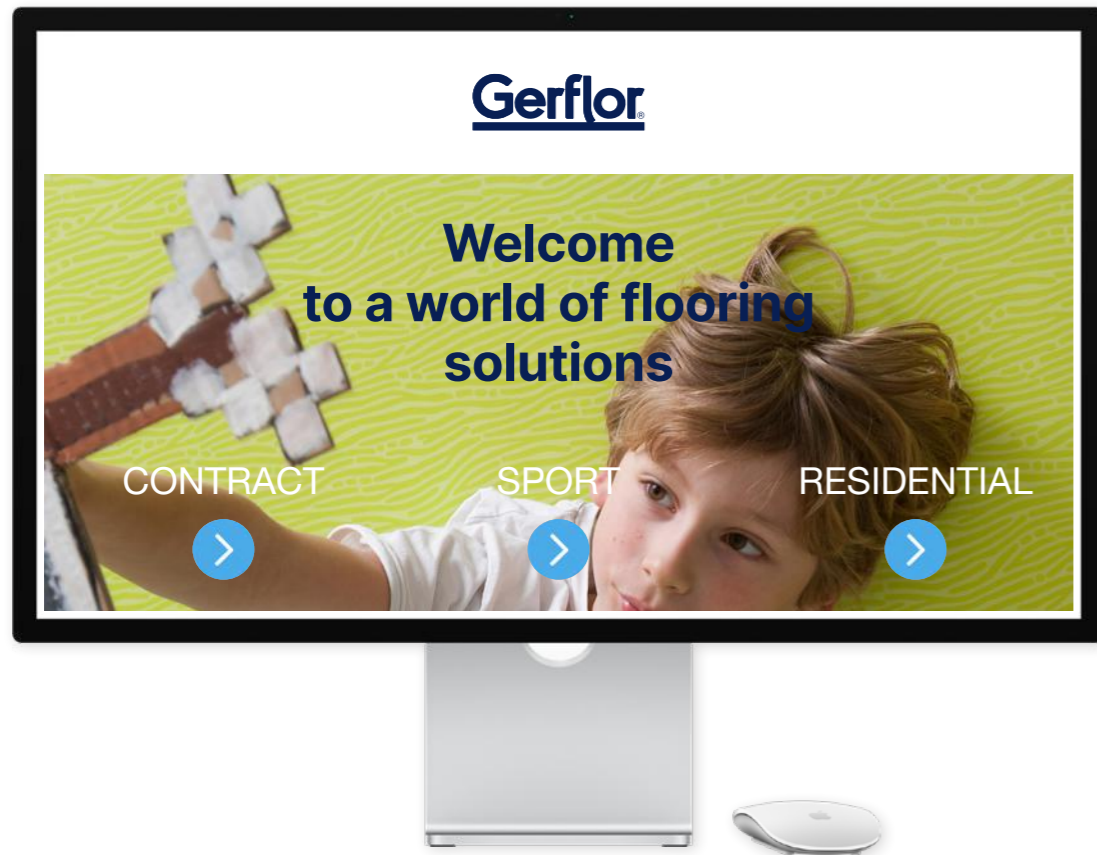


☎ 01625 428922 @ contractuk@gerflor.com @ gerflorirl@gerflor.com

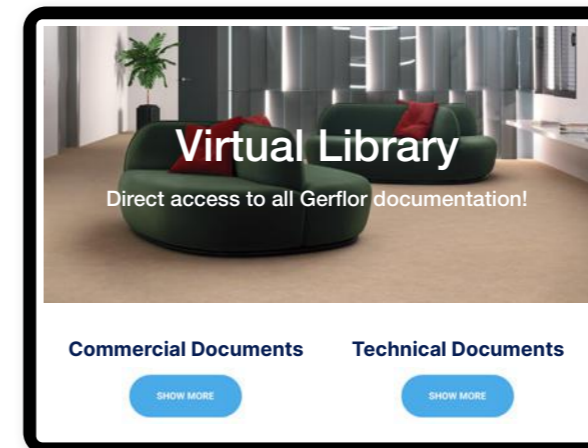


## 1 Virtual Library

Access to all commercial and technical documentation that will help you developing your projects.

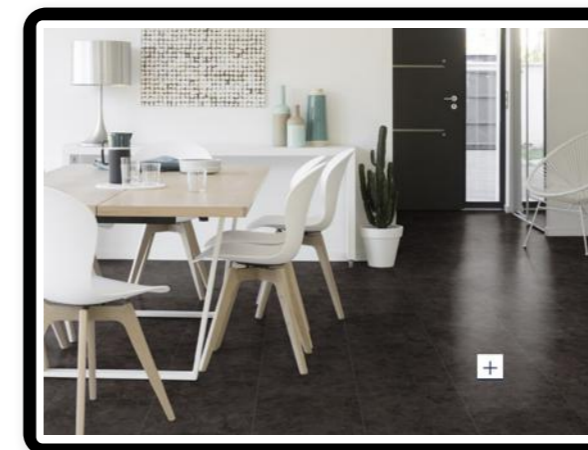

## 2 Interior Designer

The Interior Designer provides you a real time simulation of the floor selected, either in your own photo or in a pictures' gallery.

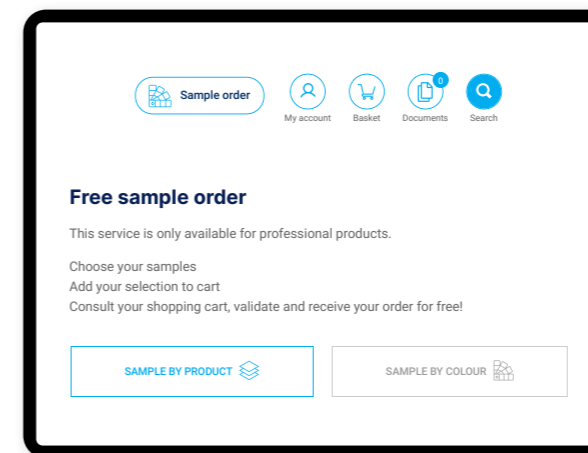

## 3 Free Samples

Samples of our products are readily available on request and we aim to process your order within 24 hours.

Follow us on social media! #Gerflor

**Disclaimers**  
Due to printing limitations there may be variations between the colours of the actual flooring and images shown in this document. The technical information contained in this brochure is subject to change at any time due to products being subject continuous improvement processes. Please check product ranges and latest technical information on our website [www.gerflor.co.uk](http://www.gerflor.co.uk) or with a sales advisor prior to ordering.